



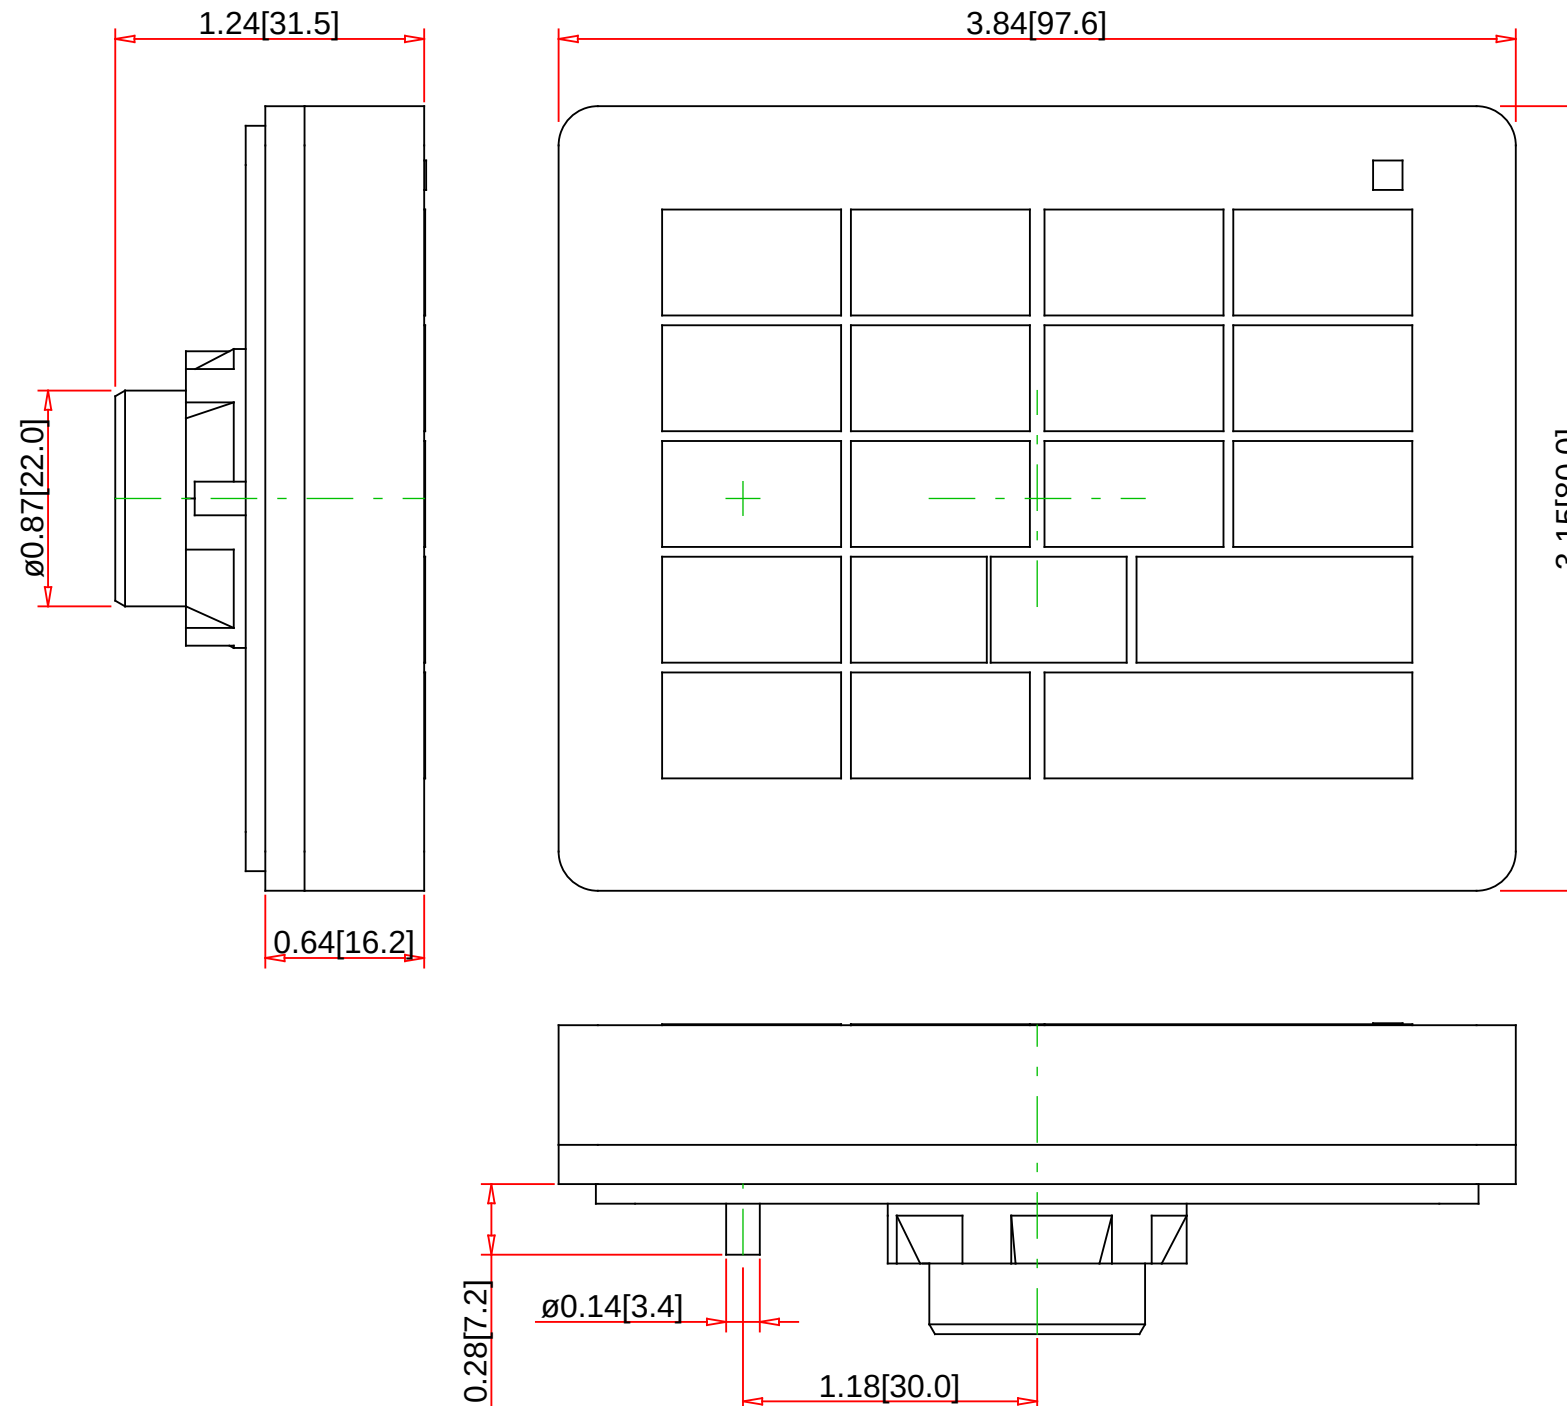

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

HMIZKB1

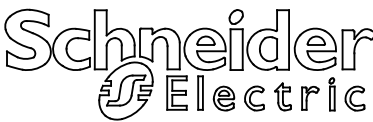

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

NEMA Protection: Type 4X
Storage Temperature: -20 to 60°C (-4 to 140°F)
Operating Temperature: 0 to 55°C (32 to 131°F)
IP Protection: IP65
Humidity: 10% to 90% non-condensing
Voltage: DC 5V, Powered by USB
Connection: USB 2.0
Power: 0.75W

Description:

Certifications:
Hazardous Locations:
Buttons:
LED Indicators:
Standards:

Specification:

Magelis USB Keyboard - 22 mm – 20 keys
CE, UL/CUL listed, RCM, EAC
Class I Division 2 Groups A/B/C/D
20 keys (12 programmable)
14 LEDs (12 programmable)
CSA C22.2 No 142, EN 61000-6-2, EN 61000-6-4, ROHS directive 2002/95/EC,
UL 508, EMC 2004/108/EC, WEEE directive 2002/96/EC, CSA C22.2 No 213,
RoHS China SJ/T 11363-2006, ANSI/ISA 12.12.01