



Main

Bezel material	Chromium plated metal
Device short name	K
Enclosure type	Dust and oil resistant weatherproof enclosure indoor/outdoor
Mounting diameter	1.18 in (30 mm)

Complementary

Cap/operator or lens colour	black
Contacts type and composition	Without contact block
Operator position information	3 positions
Operator profile	Standard knob
Operator profile	1 projecting push-button
Type of operator	Spring return both sides to centre

Environment

NEMA degree of protection	NEMA 1/2/3/3R/4/6/12/13
Product certifications	UL listed file E42259 CCN NKCR CSA LR24590 class 3211 03 CE

Ordering and shipping details

Category	21426 - 9001 K (NOT KA,KM,KX)
Discount Schedule	CS1
GTIN	00785901043584
Package weight(Lbs)	0.27 lb(US) (0.12 kg)
Returnability	No
Country of origin	MX


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

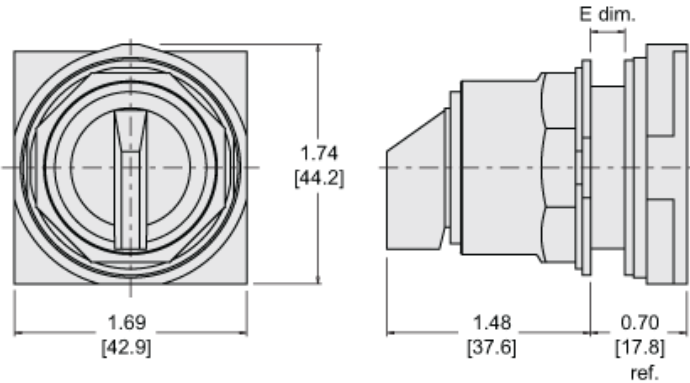

Panel Thickness E dim. in. [mm]	Number of Gasket
1/16 [1.6]	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

in.
[mm]