
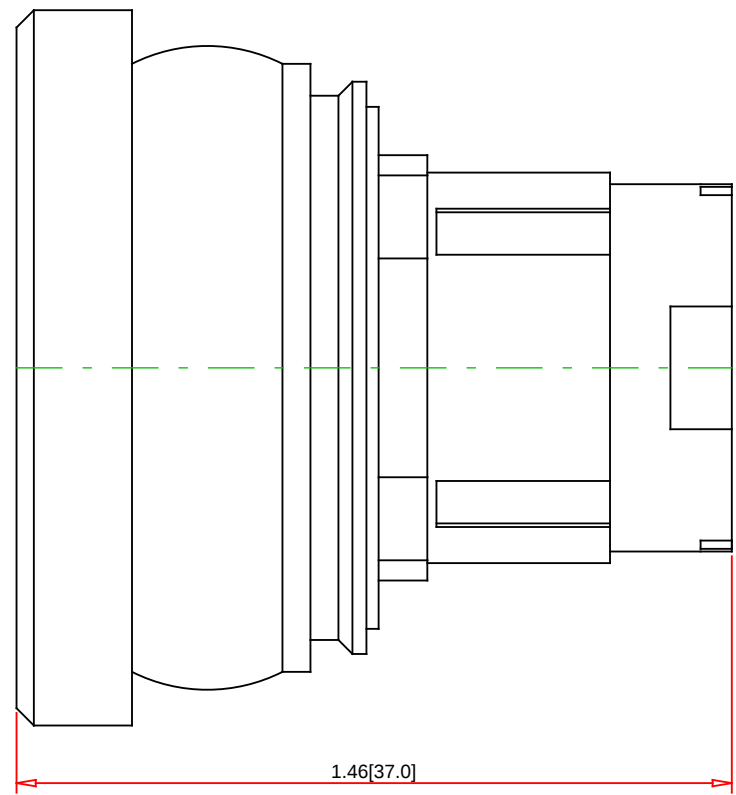


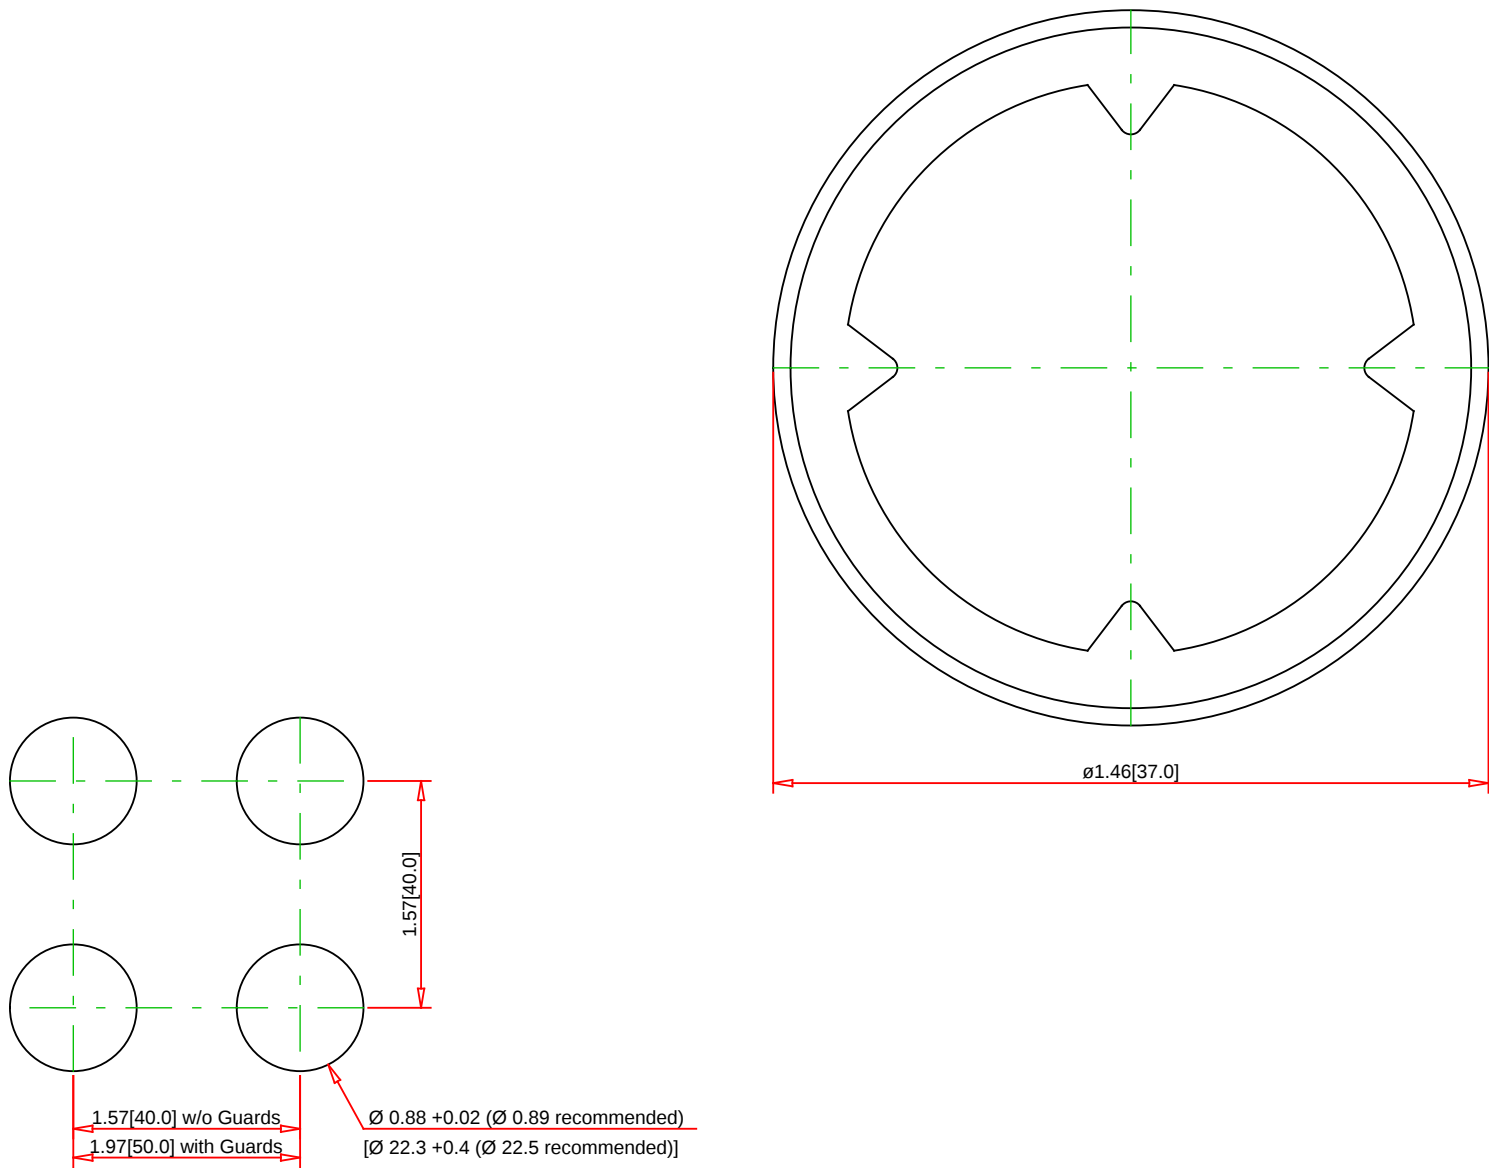

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]		Part No.: ZB4BC48007RA		Schneider Electric Schneider Electric United States North American Division Boston One Campus 800 Federal Street Andover, MA 01810, USA Phone: +1 8773425173 Email: CCC@us.schneider-electric.com	
Technical Information: UL Cert.: E164353 CCN NKCR CSA Cert.: LR44087 Class 3211 03 CE Cert.: CE per IEC IP Protection: P 66 IP 69K NEMA Protection: NEMA 4, 12, 13 IK Protection: IK03 Ambient Air Temp. (for storage): -40 to +85 °C Ambient Air Temp. (for operation): -40 to +70°C Electric Shock Protection: Class I Washdown Resistance (in Pa): 90 Pa		Description: Mechanical Durability (in operating cycles): 3000000 Vibration Resistance: 5 gn Mechanical Shock Resistance: 30 gn Color: Red Button Marking: w/, rotate 90°		Specification: 22MM HARSH PB, RED, W/ MARKING, ROTATE 90°	