


GUPXCK100F

NEMA 12 (IP54) Filters Kit for GUTOR PXC UL
75/100 kVA UPS

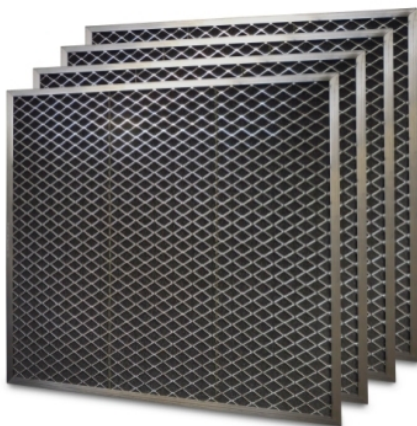

Main

| | |
|---------------------------------------|---------------------------------|
| Ambient air temperature for operation | 14...104 °F (-10...40 °C) |
| Ambient air temperature for storage | 5...104 °F (-15...40 °C) |
| Maximum Depth | 0.39 in (1 cm) |
| Maximum Height | 8.50 in (21.6 cm) |
| Mounting mode | Not rack-mountable |
| Operating altitude | 0...9842 ft |
| Net Weight | 0.99 lb(US) (0.45 kg) |
| Relative humidity | 0...95 % non-condensing |
| Standards | FCC Part 15 class A UL 1778 |
| Storage altitude | 0...16404 ft (0.00...4999.94 m) |
| Maximum Width | 8.50 in (21.6 cm) |

Ordering and shipping details

| | |
|---------------------|-----------------------|
| Package weight(Lbs) | 2.01 lb(US) (0.91 kg) |
|---------------------|-----------------------|

Packing Units

| | |
|------------------|--------------------|
| Package 1 Height | 10.00 in (25.4 cm) |
| Package 1 width | 10.00 in (25.4 cm) |
| Package 1 Length | 7.99 in (20.3 cm) |

Contractual warranty

| | |
|----------|---------------------|
| Warranty | 1 year (parts only) |
|----------|---------------------|

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.