



### Main

|                           |                                                |
|---------------------------|------------------------------------------------|
| Range of product          | Harmony 9001SK                                 |
| Product or component type | Complete illuminated mushroom head push-button |
| Device short name         | 9001SK                                         |
| Type of operator          | Stay put                                       |
| Operator profile          | Green mushroom Ø 41 mm, unmarked               |
| Light block supply        | Direct                                         |

### Complementary

|                               |                        |
|-------------------------------|------------------------|
| Bezel material                | Plastic                |
| Mounting diameter             | 1.18 in (30 mm)        |
| Net Weight                    | 0.50 lb(US) (0.226 kg) |
| Operating position            | Any position           |
| Shape of signaling unit head  | Round                  |
| Operator position information | 2 positions            |
| Contacts type and composition | Without contact block  |
| Mechanical durability         | 5000000 cycles         |
| Light source                  | incandescent           |
| Light source                  | Incandescent           |
| Bulb base                     | BA 9s                  |
| [Us] rated supply voltage     | 24 V AC/DC             |
| [Us] rated supply voltage     | 24 V AC/DC             |

### Environment

|                                       |                                                                                                                |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TC                                                                                                             |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                     |
| Ambient air temperature for operation | -13...158 °F (-25...70 °C)                                                                                     |
| Electrical shock protection class     | Class II IEC 61140                                                                                             |
| IP degree of protection               | IP66 IEC 60529                                                                                                 |
| NEMA degree of protection             | NEMA 1<br>NEMA 12<br>NEMA 13<br>NEMA 2<br>NEMA 3<br>NEMA 3R<br>NEMA 4<br>NEMA 4X                               |
| Standards                             | EN/IEC 60947-5-4<br>UL 508<br>EN/IEC 60947-1<br>JIS C 852<br>EN/IEC 60947-5-1<br>JIS C 4520<br>CSA C22.2 No 14 |
| Product certifications                | NEMA<br>UL 508                                                                                                 |
| Vibration resistance                  | 7 gn 2...500 Hz)IEC 60068-2-6                                                                                  |
| Shock resistance                      | 50 gn IEC 60068-2-27                                                                                           |

## Ordering and shipping details

|                       |                      |
|-----------------------|----------------------|
| Category              | 21429 - 9001 SK,SKY  |
| Discount Schedule     | CS1                  |
| GTIN                  | 03389118036482       |
| Nbr. of units in pkg. | 1                    |
| Package weight(Lbs)   | 0.5 lb(US) (0.23 kg) |
| Returnability         | No                   |
| Country of origin     | MX                   |

## Packing Units

|                        |                    |
|------------------------|--------------------|
| Unit Type of Package 1 | PCE                |
| Package 1 Height       | 1.80 in (4.572 cm) |
| Package 1 width        | 2.10 in (5.334 cm) |
| Package 1 Length       | 3.60 in (9.144 cm) |


## Offer Sustainability

|                            |                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                        |
| REACH free of SVHC         | Yes                                                                                                                          |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                               |
| Toxic heavy metal free     | Yes                                                                                                                          |
| Mercury free               | Yes                                                                                                                          |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                          |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                       |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

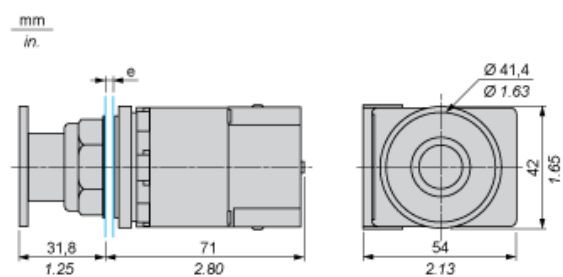


e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

---

Contact Block Mounting Position

---

Top and Rear views

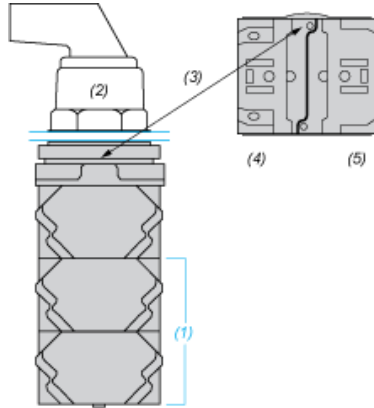

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2