Product End-of-Life Instructions

Tower Light XVU

Product Range Tower Light XVU Marketing Model XVUC9V





Weight (excluding packaging) in g:

394








Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

Reuse ⇒ Separation for special treament ⇒ Other Dismantling ⇒ Shredding

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

CAUTION: The product contains 3 printed circuit boards which are recommmended to be treated separately during the End of Life operations.

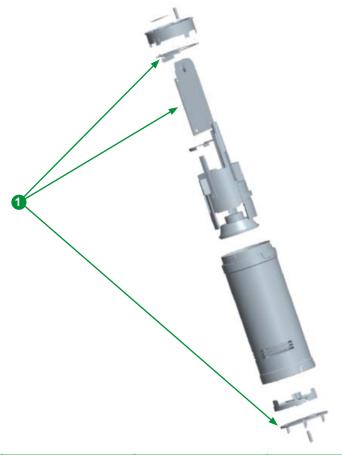

Recommendation	Number on drawing	Components	Weight (g)	Comment
Special treatment	0	PCBA	48.4	_

Schneider Electric Industries SAS

35, rue Joseph Monier CS30323

F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 € www.schneider-electric.com The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V1.

Publication : Schneider Electric