
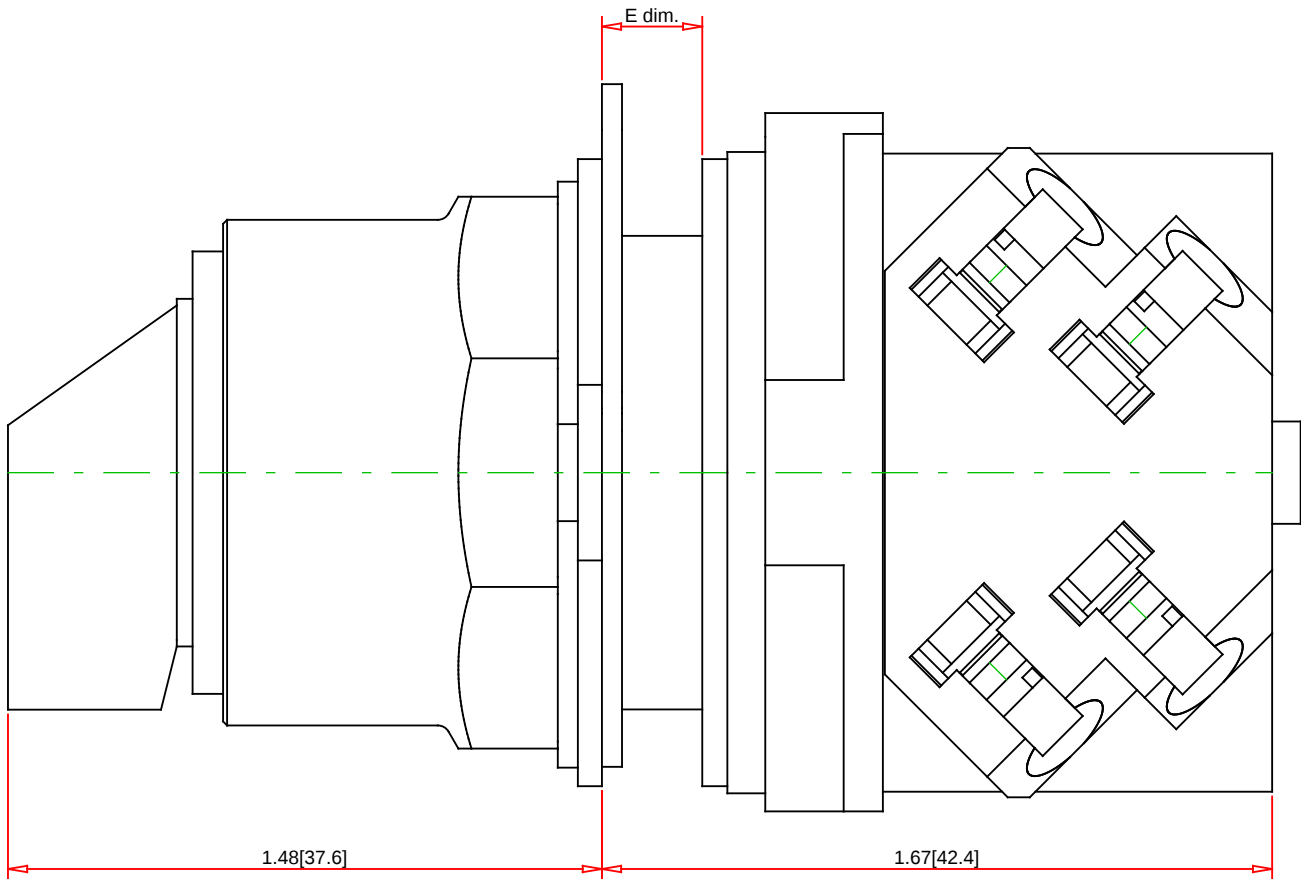


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

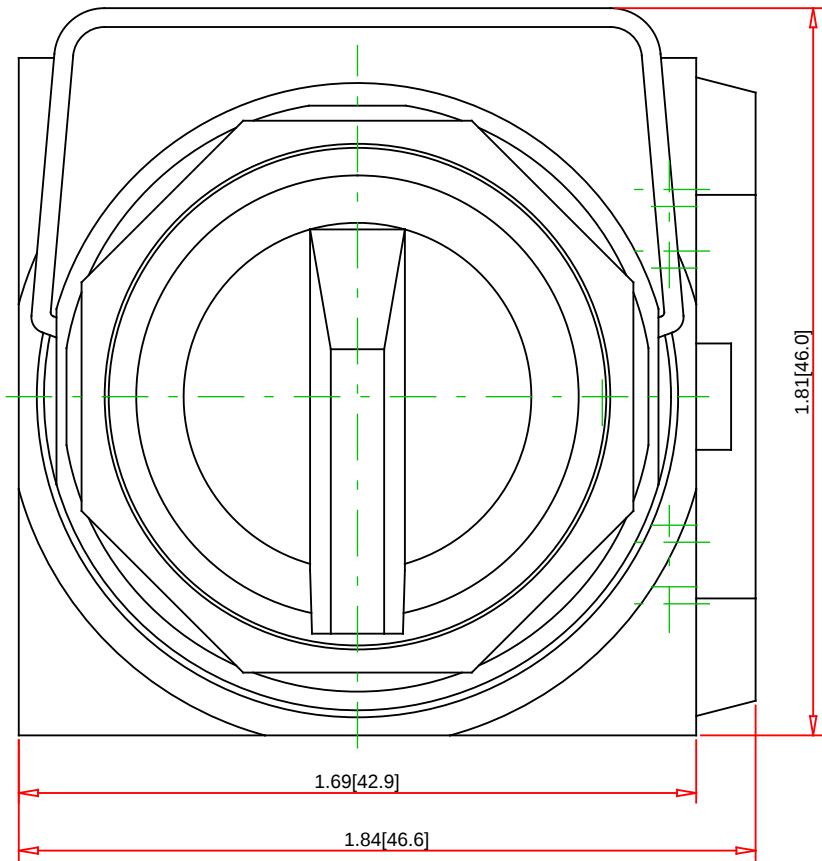

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9001KS43BH13

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Circuit Configuration:	SPDT
Electrical Life:	100000
Mechanical Life:	500000
Operating Temp. Range:	-30 to 60 °C (-22 to 140 °F)
Power Rating:	Not HP Rated
Number of Poles:	1 N.O. + 1 N.C.
AC Voltage:	600
Current Rating:	10
Contact Rating:	AC-15: 600V, 1.2A; 240V, 3A; 120V, 6A DC-13: 600V, 0.1A; 250V, 0.27A; 125V, 0.55A

Specification:

Description:	Push Buttons 30 mm - Assemblies
Type:	Selector Switch
Actuator Type:	Selector Knob
Illumination:	None
Terminal Plating:	Terminal - Brass - no plating, Screw - Zinc Chromate
Actuator Color:	Black
Actuator Part No.:	9001KS43B
Contact Block Part No.:	9001KA1
Legend Plate Part No.:	9001KN260