

# ZB4BK1343

red illuminated selector switch head Ø22 3-position stay put



## Main

|                               |                                      |
|-------------------------------|--------------------------------------|
| Range of product              | Harmony XB4                          |
| Product or component type     | Head for illuminated selector switch |
| Product compatibility         | Integral LED                         |
| Device short name             | ZB4                                  |
| Bezel material                | Chromium plated metal                |
| Head type                     | Standard                             |
| Mounting diameter             | 0.87 in (22 mm)                      |
| Sale per indivisible quantity | 1                                    |
| Shape of signaling unit head  | Round                                |
| Type of operator              | Stay put                             |
| Operator profile              | Red standard handle                  |
| Operator position information | 3 positions +/- 45°                  |

## Complementary

|                                    |                                                                                                                                                                                                      |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width                  | 1.14 in (29 mm)                                                                                                                                                                                      |
| CAD overall height                 | 1.14 in (29 mm)                                                                                                                                                                                      |
| CAD overall depth                  | 1.69 in (43 mm)                                                                                                                                                                                      |
| Net Weight                         | 0.08 lb(US) (0.036 kg)                                                                                                                                                                               |
| Resistance to high pressure washer | 1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m                                                                                                                                                        |
| Mechanical durability              | 1000000 cycles                                                                                                                                                                                       |
| Electrical composition code        | M3 4 single front mounting integral LED<br>M6 2 single front mounting integral LED and transformer<br>M10 2 single front mounting integral LED<br>M4 4 single and double front mounting integral LED |
| Device presentation                | Basic element                                                                                                                                                                                        |

## Environment

|                                       |                                                                                                                                         |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                      |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                                              |
| Ambient air temperature for operation | -40...158 °F (-40...70 °C)                                                                                                              |
| Overvoltage category                  | Class I IEC 60536                                                                                                                       |
| IP degree of protection               | IP66 IEC 60529<br>IP67<br>IP69<br>IP69K                                                                                                 |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                      |
| IK degree of protection               | IK06 IEC 50102                                                                                                                          |
| Standards                             | JIS C8201-5-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-1<br>CSA C22.2 No 14<br>EN/IEC 60947-5-5<br>UL 508<br>EN/IEC 60947-5-4<br>JIS C8201-1 |

|                        |                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------|
| Product certifications | RINA<br>DNV<br>CSA<br>BV<br>UL Listed<br>LROS (Lloyds register of shipping)<br>GL                                  |
| Vibration resistance   | 5 gn 2...500 Hz)IEC 60068-2-6                                                                                      |
| Shock resistance       | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27 |

### Ordering and shipping details

|                       |                                     |
|-----------------------|-------------------------------------|
| Category              | 22468 - PUSHBUTTONS,22MM(METAL) NEW |
| Discount Schedule     | CS2                                 |
| GTIN                  | 00785901373032                      |
| Nbr. of units in pkg. | 1                                   |
| Package weight(Lbs)   | 0.09 lb(US) (0.04 kg)               |
| Returnability         | Yes                                 |
| Country of origin     | FR                                  |

### Packing Units

|                  |          |
|------------------|----------|
| Package 1 Height | 0.450 dm |
| Package 1 width  | 0.340 dm |
| Package 1 Length | 0.540 dm |

### Offer Sustainability

|                            |                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------|
| REACH free of SVHC         | Yes                                                                                            |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                            |
| Mercury free               | Yes                                                                                            |
| RoHS exemption information | <a href="#">Yes</a>                                                                            |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                         |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                  |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                        |


### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

---




Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board                                                                                                                                                                                                                                           | Connection by Faston Connectors |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
|                                                                                                                                                                                                                                                                                                                                 |                                 |
| <p>(1) Diameter on finished panel or support</p> <p>(2) 40 mm min. / 1.57 in. min.</p> <p>(3) 30 mm min. / 1.18 in. min.</p> <p>(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm <math>_{0}^{+0.4}</math> / 0.88 in. <math>_{0}^{+0.016}</math>)</p> <p>(5) 45 mm min. / 1.78 in. min.</p> <p>(6) 32 mm min. / 1.26 in. min.</p> |                                 |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

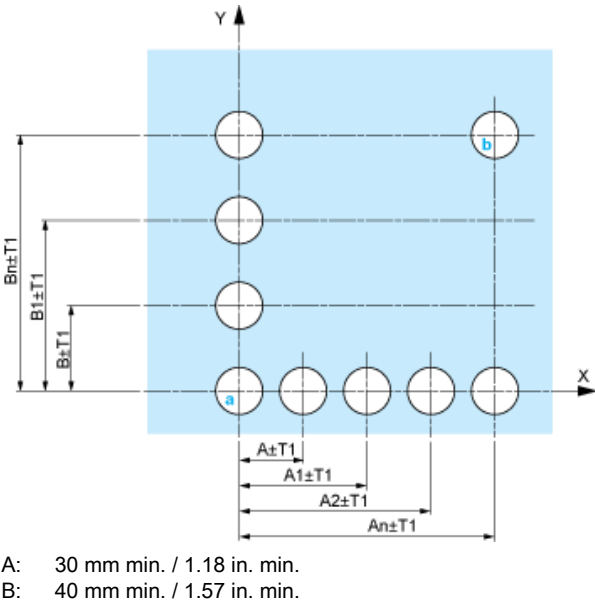


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

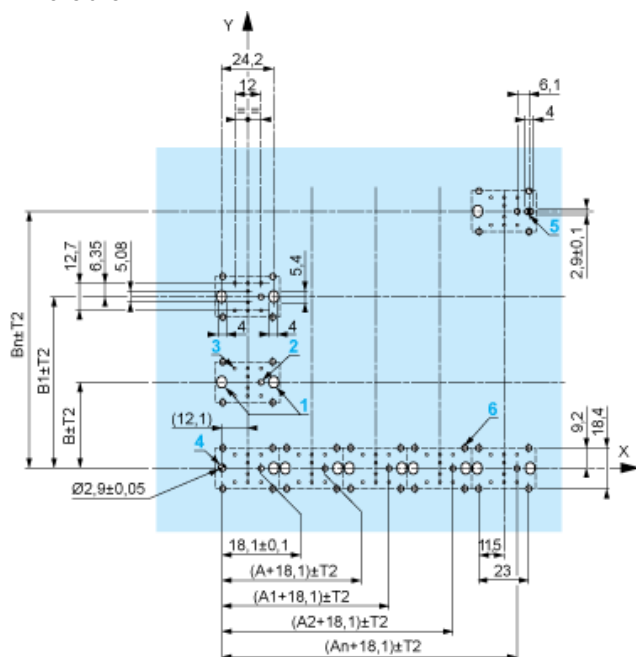

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

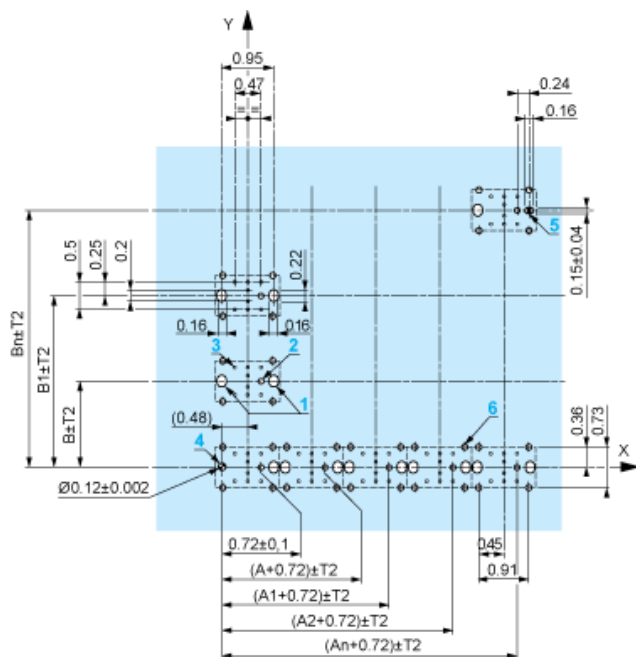

A: 1.18 in. min.

B: 1.57 in. min.


## General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in:  $T1 + T2 = 0.3 \text{ mm max.}$

## Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm$  0.1 / 0.88 in.  $\pm$  0.004
- Orientation of body/fixing collar ZB4 BZ009:  $\pm 2^{\circ} 30'$  (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB4 BD\*, ZB4 BJ\*, ZB4 BG\*).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

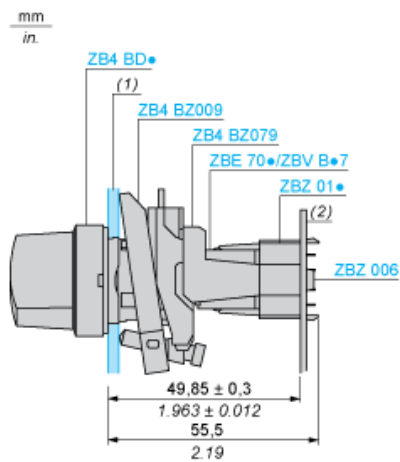

- (1) Panel  
(2) Printed circuit board

### Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  for centring adapter ZBZ 01•
- 3 8 ×  $\varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$  holes
- 4 1 hole  $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$ , for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes  $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$  for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

---

Electrical Composition Corresponding to Code M3


---



---

Electrical Composition Corresponding to Code M4


---



---

Electrical Composition Corresponding to Codes M6 and P2


---



---

Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2

---



---

Legend

---

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



|          |          |      |        |      |  |
|----------|----------|------|--------|------|--|
| Push     | Position | Top  |        |      |  |
| Bottom   |          |      |        |      |  |
| Location |          | Left | Right  |      |  |
| State    |          | 1    | 0      |      |  |
| Contacts | N/O      |      | closed | open |  |
| N/C      |          | open | closed |      |  |

Position 0°



|          |          |        |        |      |  |
|----------|----------|--------|--------|------|--|
| Push     | Position | Top    |        |      |  |
| Bottom   |          |        |        |      |  |
| Location |          | Left   | Right  |      |  |
| State    |          | 0      | 0      |      |  |
| Contacts | N/O      |        | open   | open |  |
| N/C      |          | closed | closed |      |  |



Position 45°



|          |                                                                                   |                                                                                   |                                                                                   |                                                                                     |  |
|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
| Push     | Position                                                                          | Top                                                                               |  |  |  |
| Bottom   |  |  |                                                                                   |                                                                                     |  |
| Location |                                                                                   | Left                                                                              | Right                                                                             |                                                                                     |  |
| State    |                                                                                   | 0                                                                                 | 1                                                                                 |                                                                                     |  |
| Contacts | N/O                                                                               |                                                                                   | open                                                                              | closed                                                                              |  |
| N/C      |                                                                                   | closed                                                                            | open                                                                              |                                                                                     |  |