



## Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

## Complementary

Electrical connection	Elbowed female connector M12, 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	16.40 ft (5 m)
Cable outer diameter	0.20 in (5.2 mm)
Cable composition	5 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
Line Rated Current	3 A
Contact resistance	5000 μOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.44 lb(US) (0.201 kg)

## Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)



## Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	03389119621540
Nbr. of units in pkg.	1
Package weight(Lbs)	0.9 lb(US) (0.41 kg)
Returnability	No
Country of origin	CZ

## Packing Units

Package 1 Height	0.300 dm
Package 1 width	1.800 dm
Package 1 Length	1.800 dm


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

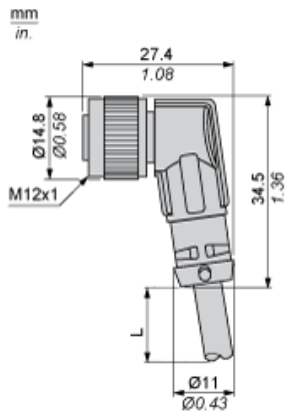


L : Length of cable

---

Connections and Schemes

---

Connectors



BU : Blue  
BN : Brown  
BK : Black  
GY : Grey  
BK/ Black / White  
WH :