



## Main

|                               |                                                                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XB5                                                                                                                                                            |
| Product or component type     | Selector switch                                                                                                                                                        |
| Device short name             | XB5F                                                                                                                                                                   |
| Bezel material                | Dark grey plastic                                                                                                                                                      |
| Head type                     | Built-in-flush                                                                                                                                                         |
| Mounting diameter             | 1.20 in (30.5 mm)                                                                                                                                                      |
| Sale per indivisible quantity | 1                                                                                                                                                                      |
| Shape of signaling unit head  | Round                                                                                                                                                                  |
| Type of operator              | Stay put                                                                                                                                                               |
| Operator profile              | Black standard handle, unmarked                                                                                                                                        |
| Operator position information | 2 positions 90°                                                                                                                                                        |
| Contacts type and composition | 1 NO + 1 NC                                                                                                                                                            |
| Contact operation             | Slow-break                                                                                                                                                             |
| Connections - terminals       | Screw clamp terminals, <= 2 x 1.5 mm <sup>2</sup> with cable end EN/IEC 60947-1<br>Screw clamp terminals, >= 1 x 0.22 mm <sup>2</sup> without cable end EN/IEC 60947-1 |

## Complementary

|                                             |                                                                                                                                                                                                                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Height                              | 1.65 in (42 mm)                                                                                                                                                                                                                                                          |
| Maximum Width                               | 1.44 in (36.6 mm)                                                                                                                                                                                                                                                        |
| Maximum Depth                               | 2.87 in (73 mm)                                                                                                                                                                                                                                                          |
| Terminals description ISO n°1               | (21-22)NC<br>(13-14)NO                                                                                                                                                                                                                                                   |
| Resistance to high pressure washer          | 1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m                                                                                                                                                                                                                            |
| Contacts usage                              | Standard contacts                                                                                                                                                                                                                                                        |
| Positive opening                            | With NC contact EN/IEC 60947-5-1 appendix K                                                                                                                                                                                                                              |
| Mechanical durability                       | 1000000 cycles                                                                                                                                                                                                                                                           |
| Tightening torque                           | 7.08...10.62 lbf.in (0.8...1.2 N.m) EN 60947-1                                                                                                                                                                                                                           |
| Shape of screw head                         | Cross Philips no 1<br>Cross pozidriv No 1<br>Slotted flat Ø 4 mm<br>Slotted flat Ø 5.5 mm                                                                                                                                                                                |
| Contacts material                           | Silver alloy (Ag/Ni)                                                                                                                                                                                                                                                     |
| Short-circuit protection                    | 10 A cartridge fuse gG EN/IEC 60947-5-1                                                                                                                                                                                                                                  |
| [Ith] conventional free air thermal current | 10 A EN/IEC 60947-5-1                                                                                                                                                                                                                                                    |
| [Ui] rated insulation voltage               | 600 V 3)EN 60947-1                                                                                                                                                                                                                                                       |
| [Uimp] rated impulse withstand voltage      | 6 kV EN 60947-1                                                                                                                                                                                                                                                          |
| [Ie] rated operational current              | 3 A 240 V, AC-15, A600 EN/IEC 60947-5-1<br>6 A 120 V, AC-15, A600 EN/IEC 60947-5-1<br>0.1 A 600 V, DC-13, Q600 EN/IEC 60947-5-1<br>0.27 A 250 V, DC-13, Q600 EN/IEC 60947-5-1<br>0.55 A 125 V, DC-13, Q600 EN/IEC 60947-5-1<br>1.2 A 600 V, AC-15, A600 EN/IEC 60947-5-1 |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical durability  | 1000000 Cycles, AC-15, 2 A 230 V 3600 cyc/h 0.5 EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 3 A 120 V 3600 cyc/h 0.5 EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 4 A 24 V 3600 cyc/h 0.5 EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, DC-13, 0.2 A 110 V 3600 cyc/h 0.5 EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A 24 V 3600 cyc/h 0.5 EN/IEC 60947-5-1 appendix C |
| Electrical reliability | $\Lambda < 10\exp(-6)$ 5 V, 1 mA in clean environment EN/IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ 17 V, 5 mA in clean environment EN/IEC 60947-5-4                                                                                                                                                                                                                                                         |
| Device presentation    | Complete product                                                                                                                                                                                                                                                                                                                                                                                          |

## Environment

|                                       |                                                                                                                     |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                  |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                          |
| Ambient air temperature for operation | -40...158 °F (-40...70 °C)                                                                                          |
| Electrical shock protection class     | Class II IEC 60536                                                                                                  |
| IP degree of protection               | IP66 IEC 60529<br>IP67<br>IP69<br>IP69K                                                                             |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                  |
| IK degree of protection               | IK03 IEC 50102                                                                                                      |
| Standards                             | EN/IEC 60947-1<br>UL 508<br>JIS C8201-5-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-1 |
| Product certifications                | UL Listed<br>CSA                                                                                                    |
| Vibration resistance                  | 5 gn 2...500 Hz)IEC 60068-2-6                                                                                       |
| Shock resistance                      | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27  |

## Ordering and shipping details

|                       |                |
|-----------------------|----------------|
| Nbr. of units in pkg. | 1              |
| Package weight(Lbs)   | 2.08 oz (59 g) |

## Packing Units

|                        |                  |
|------------------------|------------------|
| Unit Type of Package 1 | PCE              |
| Package 1 Height       | 1.69 in (4.3 cm) |
| Package 1 width        | 2.09 in (5.3 cm) |
| Package 1 Length       | 3.39 in (8.6 cm) |


## Offer Sustainability

|                            |                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                        |
| REACH free of SVHC         | Yes                                                                                                                          |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                               |
| Toxic heavy metal free     | Yes                                                                                                                          |
| Mercury free               | Yes                                                                                                                          |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                          |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                       |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                                                      |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


## Dimensions

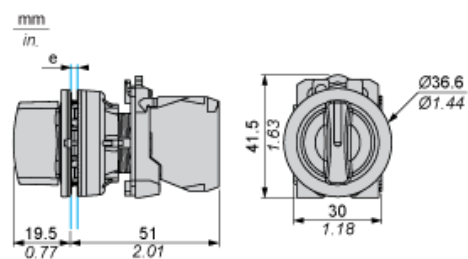

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

## Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

### Connection by Screw Clamp Terminals or Plug-in Connectors




(1) Diameter on finished panel or support

(2)  $\varnothing 30.75$  mm recommended ( $\varnothing 30.5 \text{ }_0^{+0.5}$ ) /  $\varnothing 1.21$  in. recommended ( $\varnothing 1.20 \text{ in. }_0^{+0.0196}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 40      | 1.57     |
| By Faston connectors                          | 45      | 1.77     | 40      | 1.57     |


Electrical Composition Corresponding to Code C3




Electrical Composition Corresponding to Code C4




Electrical Composition Corresponding to Code C5



Electrical Composition Corresponding to Code C6




Electrical Composition Corresponding to Code C7



## Electrical Composition Corresponding to Code C8

---



## Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1


---




## Electrical Composition Corresponding to Code C15

---


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



## Legend

---

Single contact



Double contact



Light block



Possible location



## Sequence of Contacts Fitted to 2-position Selector Switch Body

### Position 315°



|          |          |        |        |        |      |
|----------|----------|--------|--------|--------|------|
| Push     | Position | Top    |        |        |      |
| Bottom   |          |        |        |        |      |
| Location |          | Left   | Centre | Right  |      |
| State    |          | 0      | 0      | 0      |      |
| Contacts | N/O      |        | open   | open   | open |
| N/C      |          | closed | closed | closed |      |

### Position 45°



|          |          |      |        |        |        |
|----------|----------|------|--------|--------|--------|
| Push     | Position | Top  |        |        |        |
| Bottom   |          |      |        |        |        |
| Location |          | Left | Centre | Right  |        |
| State    |          | 1    | 1      | 1      |        |
| Contacts | N/O      |      | closed | closed | closed |
| N/C      |          | open | open   | open   |        |