


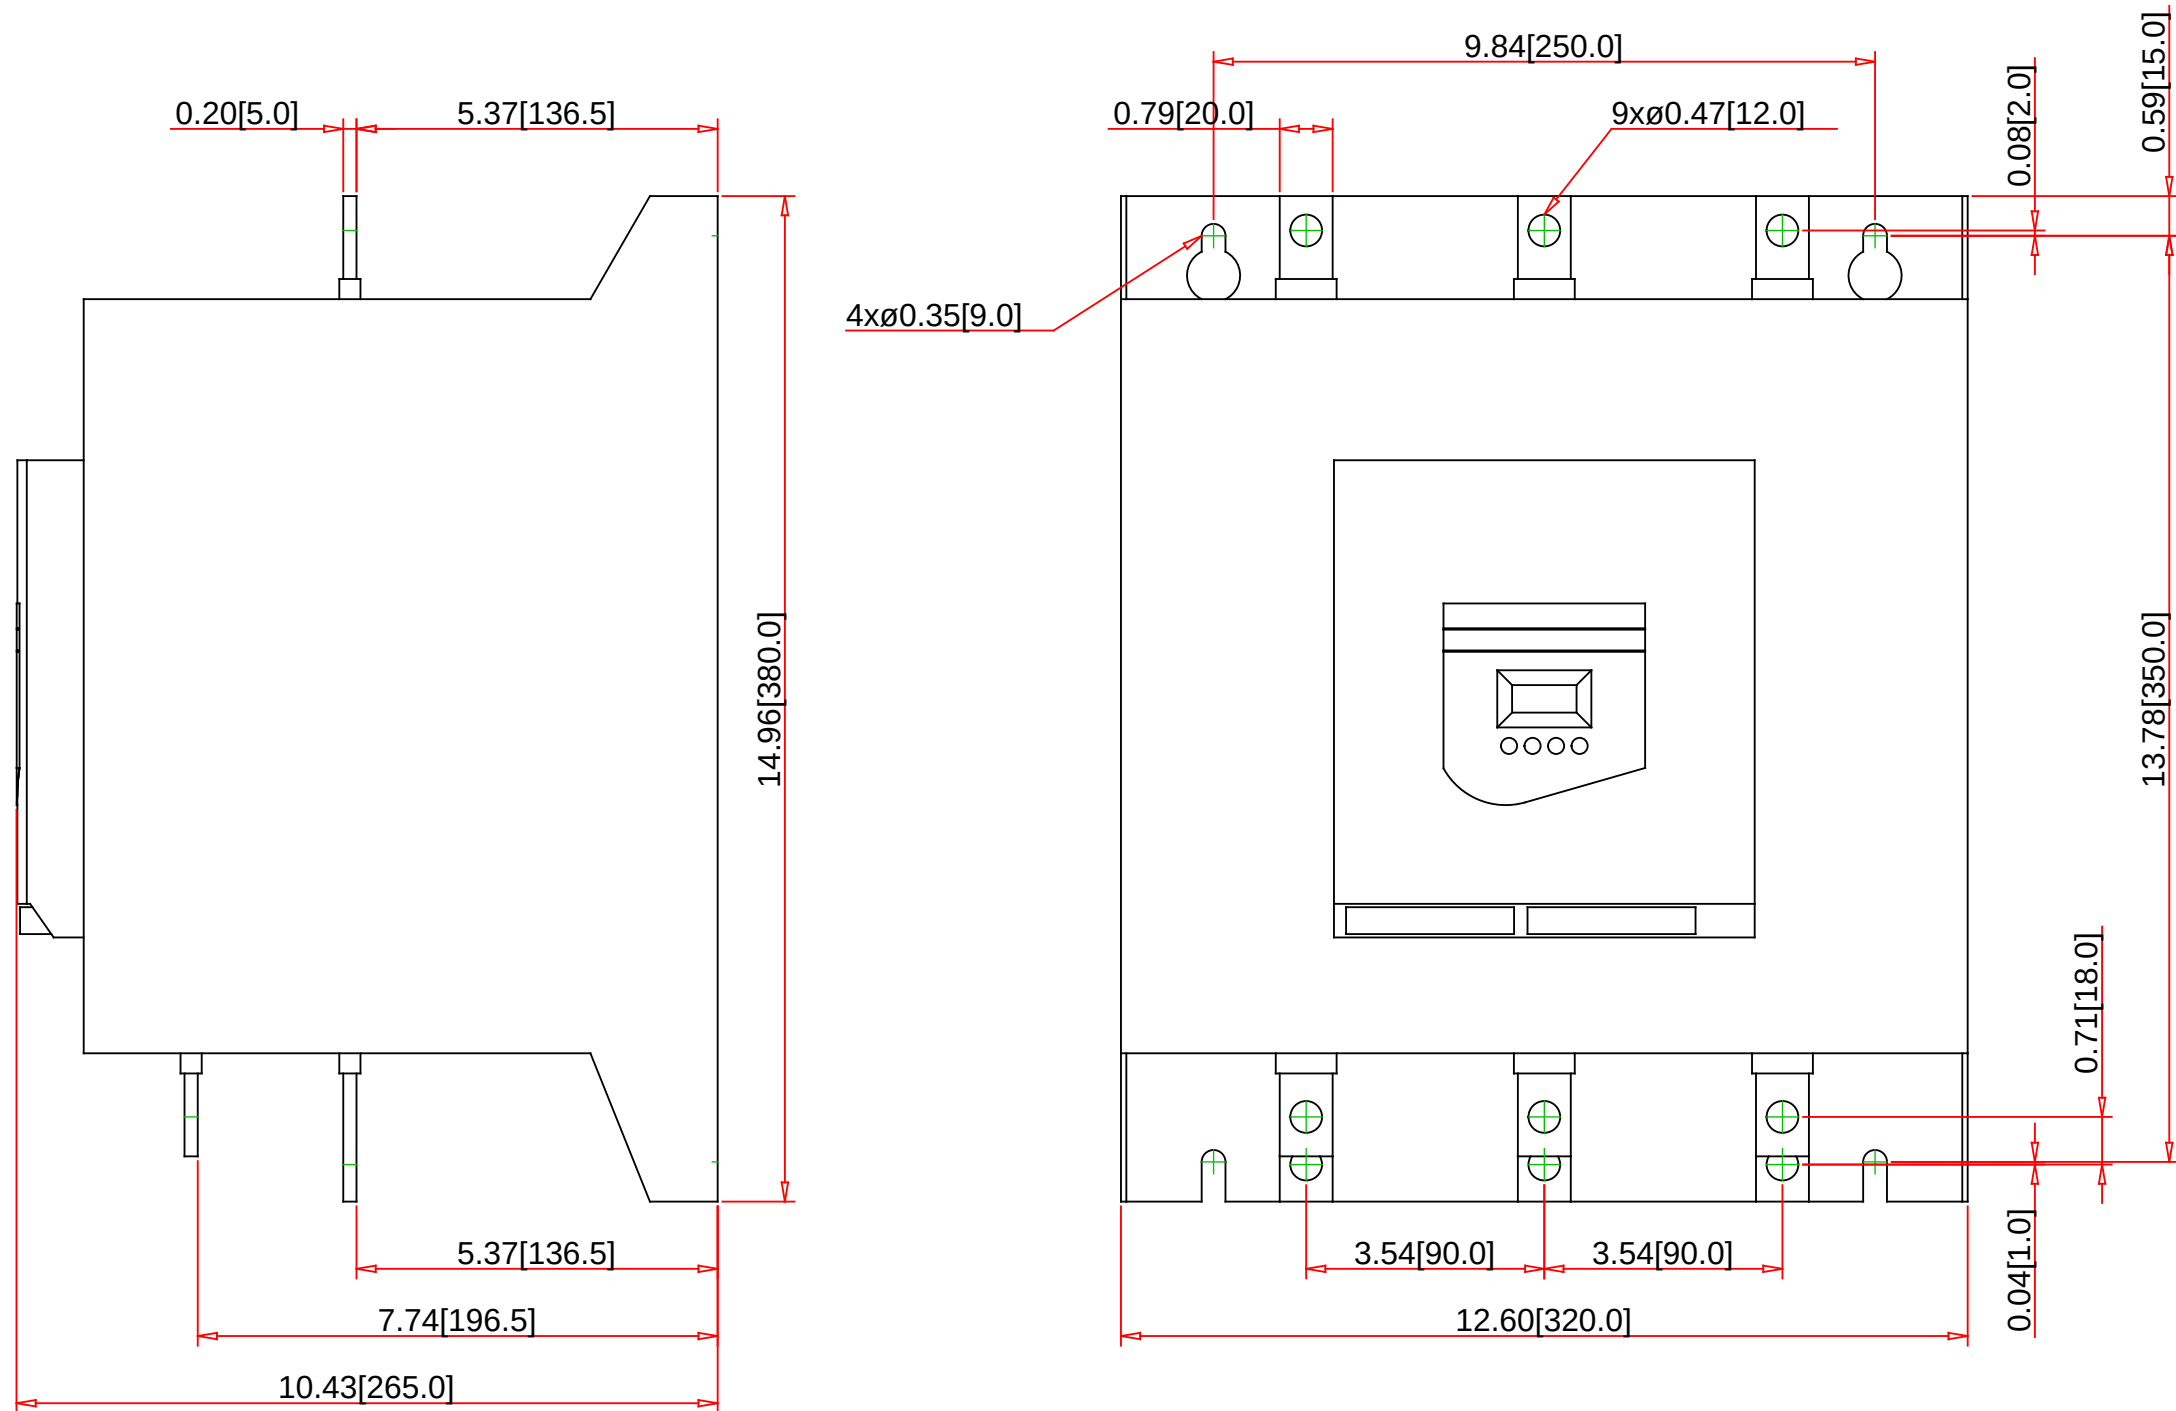

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]
- Inch Dimensions are derived from the metric.

Part No.:
ATS48C21Y

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:	
Control Voltage:	24v
Logic Input:	4
Analog Input:	1 PTC probe
Analog Output:	1
Logic/Relay Output:	3
Communication:	Modbus
Weight [lb]/[kg]:	40.1/18.2
UL File No.:	E184727
CSA File:	164581
Other:	IEC/EN 60947-4-2, EMC classes A & B, CE,DNV,C-Tick,GOST, CCC,NOM,SERPRO AND TCF

Specification:	
Description:	
Family:	Altistart 48
Product Line:	Soft Starters
Application:	Constant & Variable Torque
Output Ampere Rating:	210A
Max. HP Rating 208V:	60
Max. HP Rating 230V:	75
Max. kW Rating 400V:	110
Max. HP Rating 460V:	150
Max. HP Rating 575V:	200
Enclosure Rating:	IP00
Frame Size:	D