


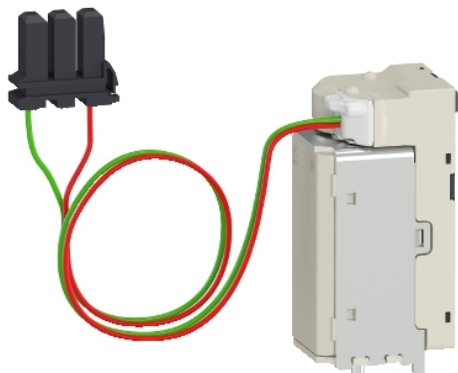

Main

Range	Masterpact
Device short name	Second MX
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker Masterpact MTZ1 circuit-breaker
Voltage release type	Shunt trip release

Complementary

Control type	Standard
[Un] voltage power supply	200...250 V AC 50/60 Hz 200...250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fixed
Maximum response time	60 ms on opening Masterpact MTZ1 60 ms on opening Masterpact MTZ2 60 ms on opening Masterpact MTZ3

Ordering and shipping details

GTIN	03606480806520
------	----------------

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information