



MULTIPLES OF RATED CURRENT


QO MOLDED CASE CIRCUIT BREAKERS  
CHARACTERISTIC TRIP CURVE NO 739-6

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
QO XD	32-40	240/415	1
QO XD	32-40	415	2,3

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

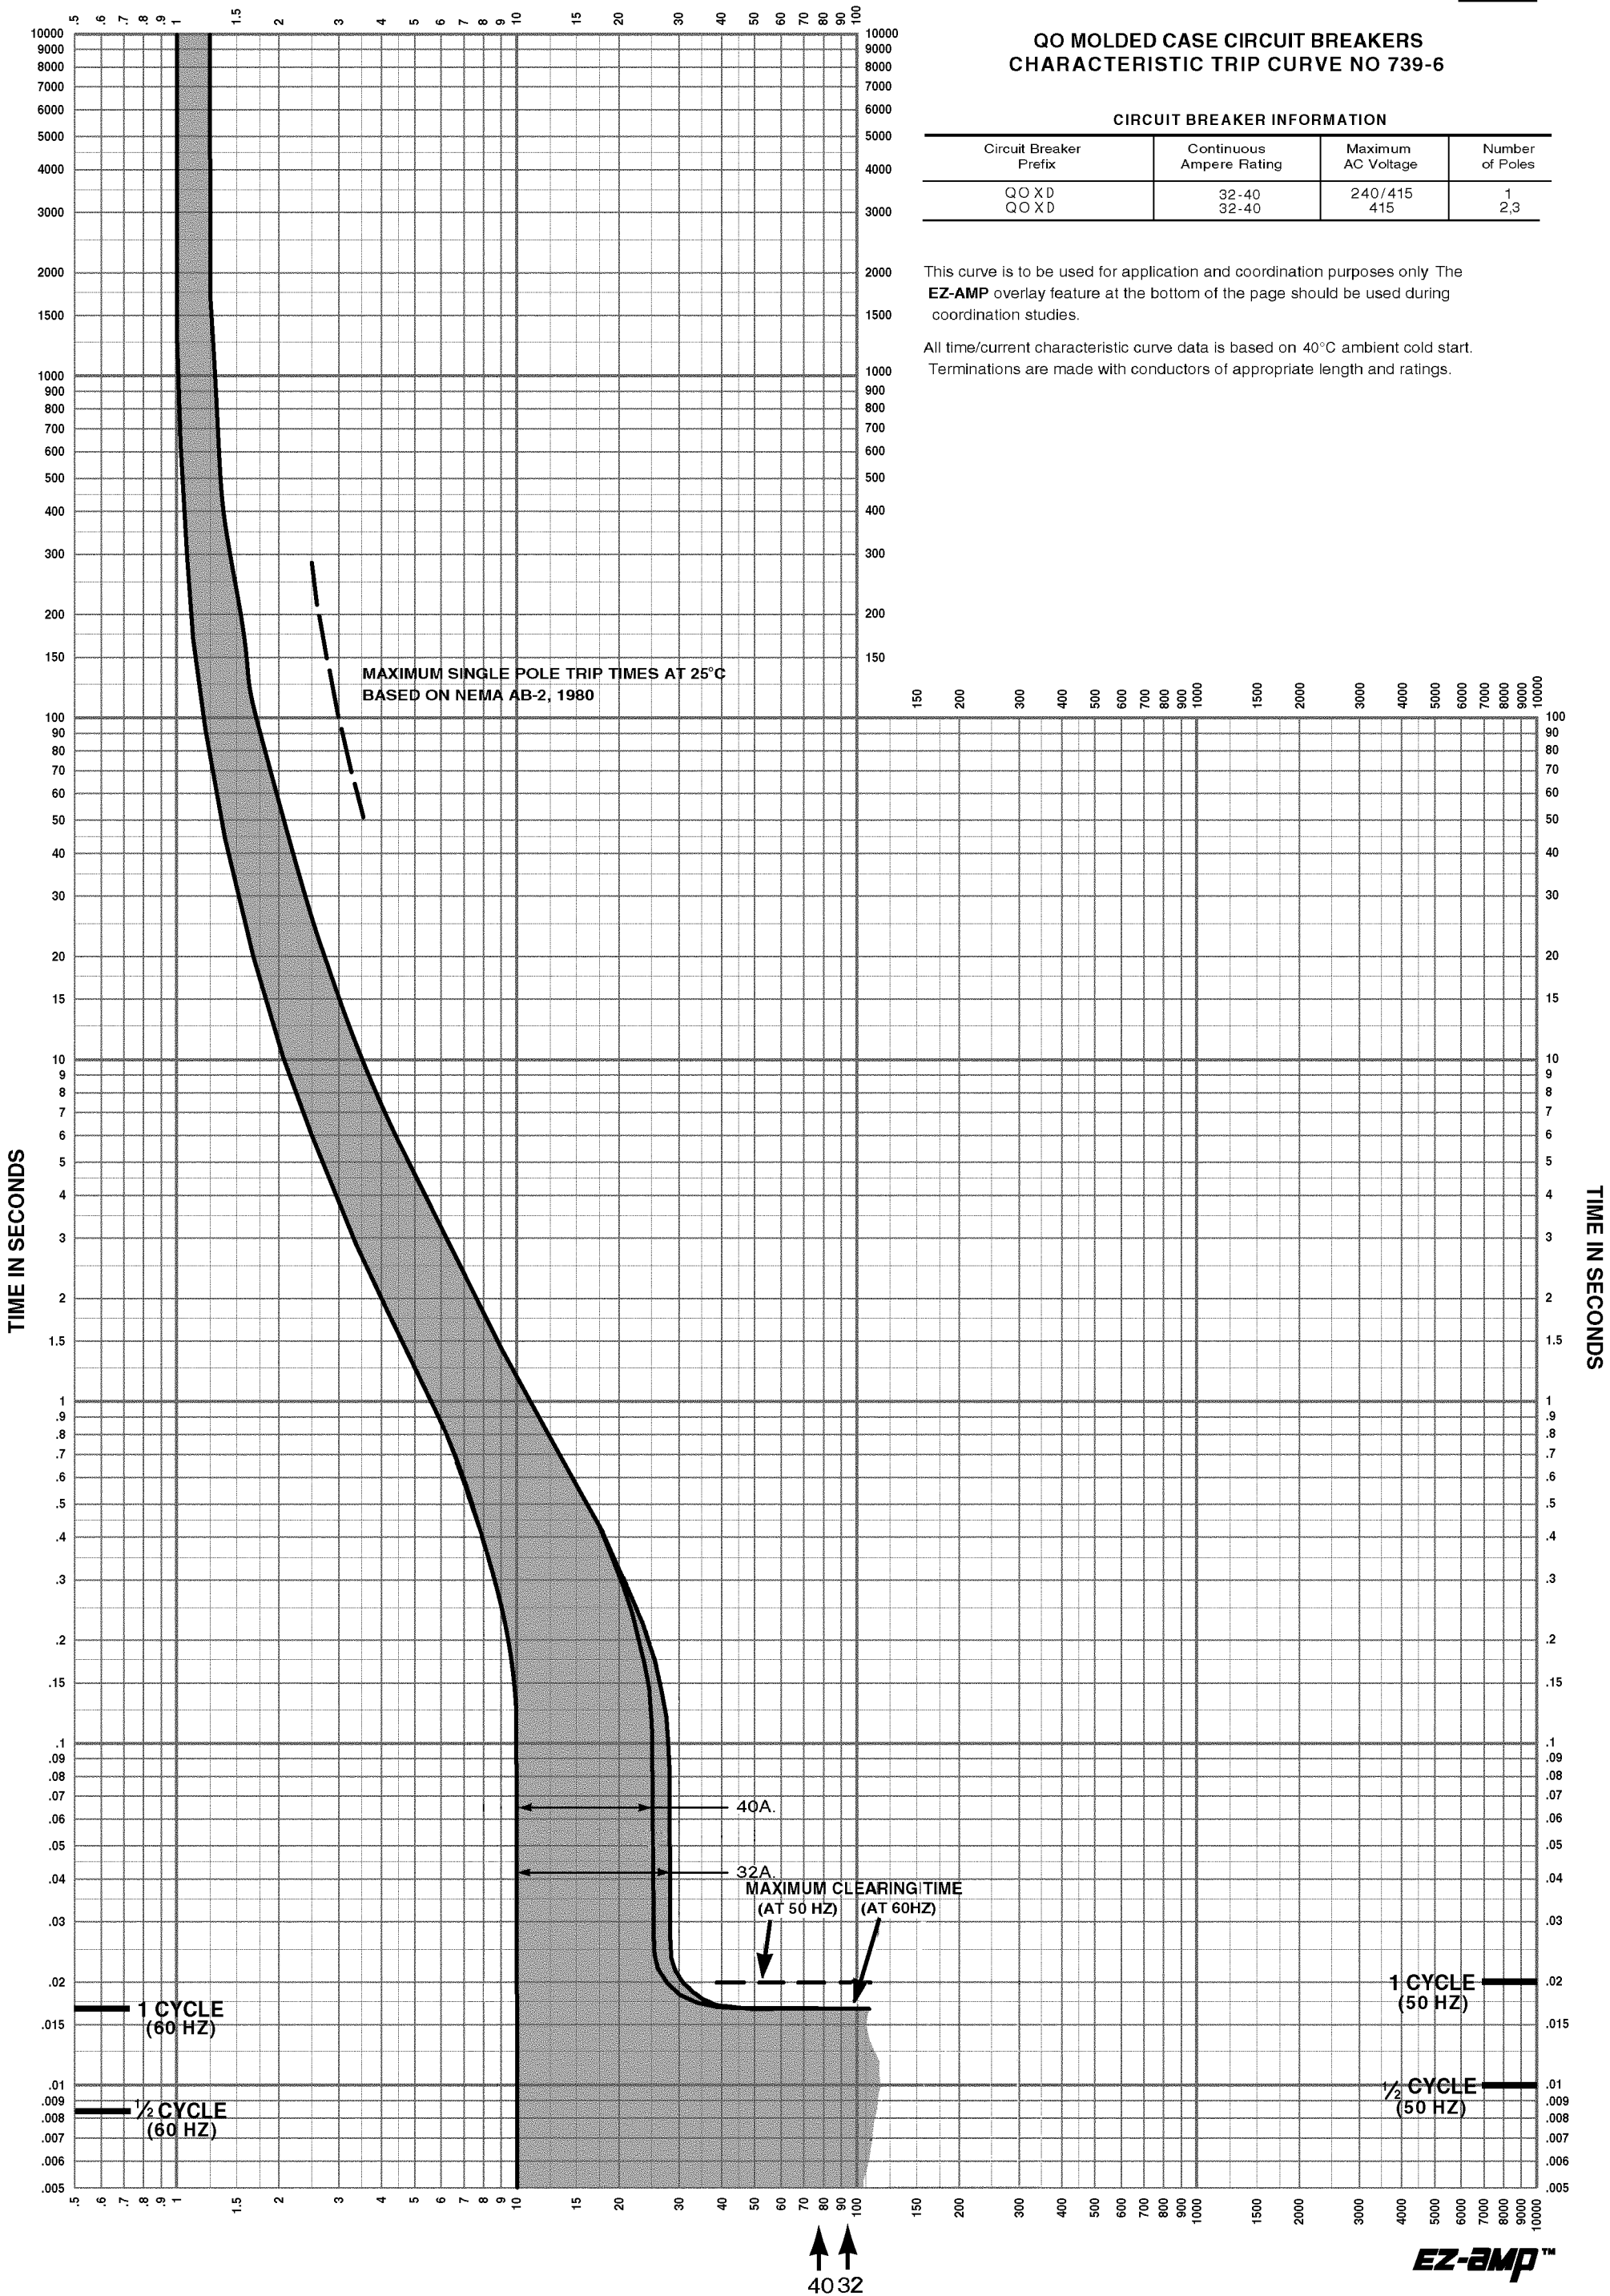

↑ ↑  
40 32

