


Product data sheet

Characteristics

8911DPSO32V09

Starter, Definite Purpose, nonreversing, 30A,
2 pole, 1 phase, 208 to 240 VAC coil, melting
alloy overload, open style

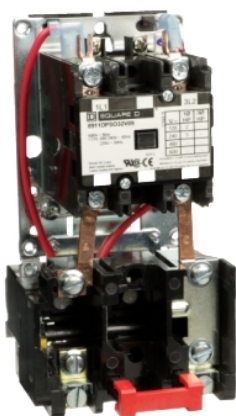

Main

Product	Definite Purpose Starter
Ampere Rating	30 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 hp 230 V AC, 1 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	1 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	180 A 230 V AC 150 A 460 V AC 120 A 575 V AC
Number of Poles	2P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	1

Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901025160
Nbr. of units in pkg.	1
Package weight(Lbs)	2.2 lb(US) (1.00 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Package 1 Height	4.80 in (12.192 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	7.90 in (20.066 cm)

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------