
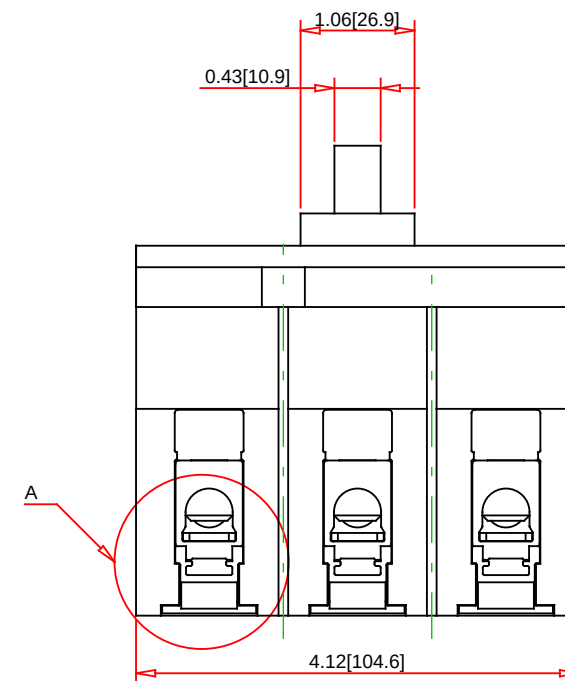
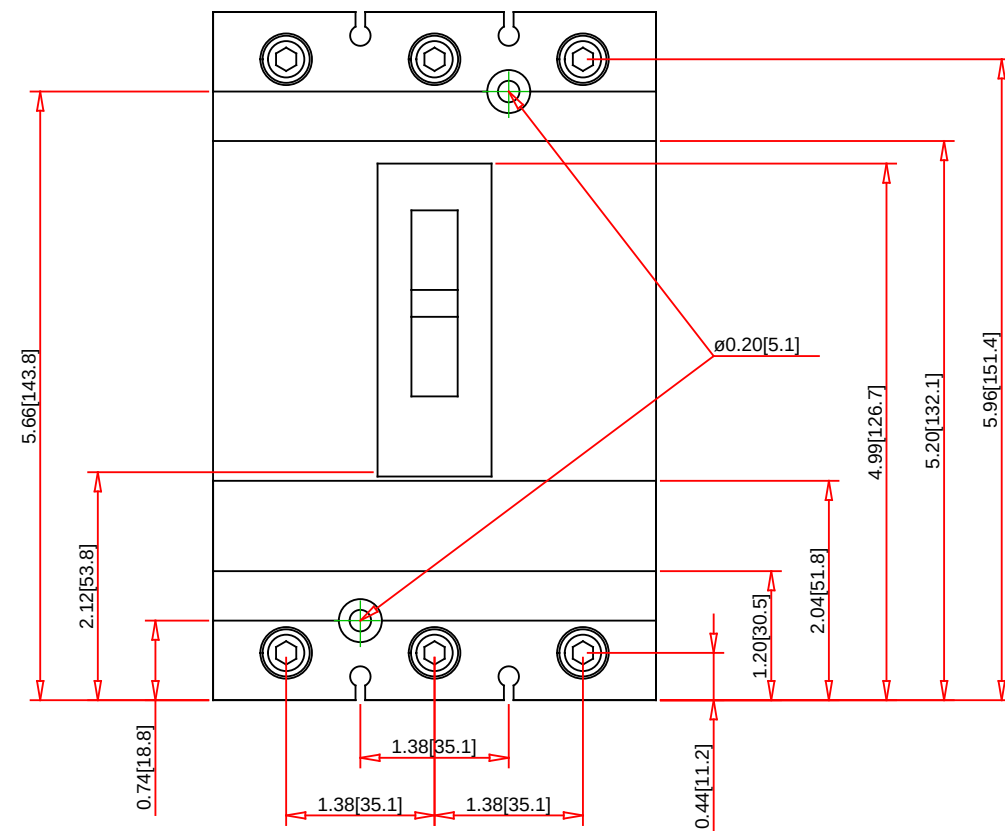
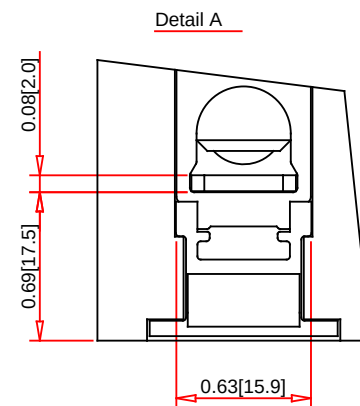


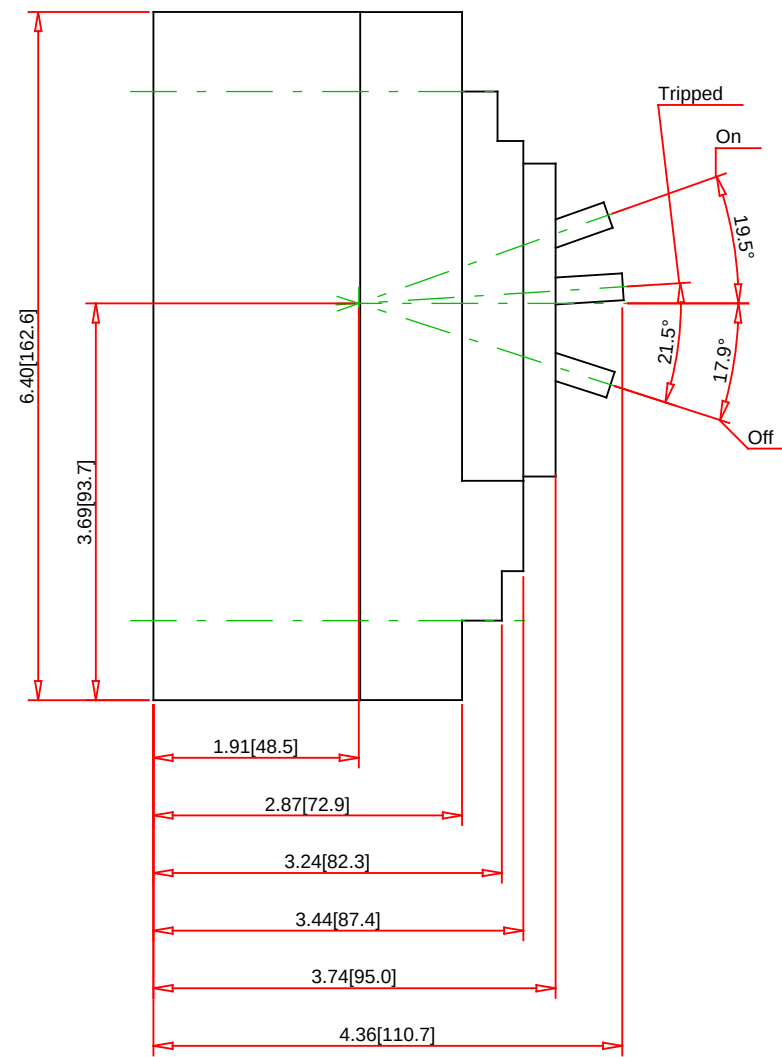

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

HGL36070C



by **Schneider Electric**

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection
For Use With: Industrial Enclosures and Switchboards
Approvals: UL Listed - CSA Certified - IEC Rated
Mounting Type: Unit Mount
Terminal Type: Line: Lug - Load: Lug
Wire Size: #14-3/0 AWG (Al/Cu)
Weight: 5 Pounds
Depth: 4.36 Inches
Height: 6.40 Inches
Width: 4.12 Inches

Description: PowerPact H-frame Thermal Magnetic Circuit Breaker
Number of Poles: 3-Pole
Ampere Rating: 70A
Voltage Rating: 600VAC/250VDC
Interrupting Rating: 65kA at 240VAC - 35kA at 480VAC - 18kA at 600VAC - 20kA at 250VDC
Circuit Breaker Rating: 100% Rated
Fixed AC Magnetic Trip: Hold: 800A - Trip: 1450A

Specification: