

Product data sheet

Characteristics

XZCPA1965L10

pre-wired connectors XZ - elbowed female -
1/2"20 UNF - 3 pins - cable PVC 10m



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | Application |

Complementary

| | |
|--------------------------------|---|
| Electrical connection | Elbowed female connector 1/2"20 UNF, 3 pins |
| Cable connector fixing | Screw-on |
| Collar material | Stainless steel 316L |
| Status LED | Without |
| Cable length | 32.81 ft (10 m) |
| Cable outer diameter | 0.20 in (5 mm) |
| Cable composition | 3 x 0.34 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| Line Rated Current | 4 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.88 lb(US) (0.4 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP69K |
| Ambient air temperature for operation | -13...185 °F (-25...85 °C) static |
| Ambient air temperature for storage | -31...212 °F (-35...100 °C) |



Ordering and shipping details

| | |
|-----------------------|------------------------|
| Category | 22483 - MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 03389119021647 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.8 lb(US) (0.36 kg) |
| Returnability | No |
| Country of origin | PL |

Packing Units

| | |
|------------------------|-----------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.57 in (4 cm) |
| Package 1 width | 7.48 in (19 cm) |
| Package 1 Length | 7.48 in (19 cm) |


Offer Sustainability

| | |
|----------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information |  Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

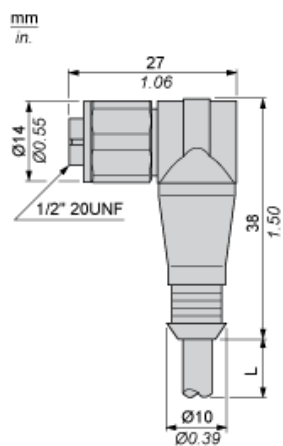

L : Length of cable

Connections and Schemes

Connectors



GN : Green
RD/ Red / White
WH :
RD/ Red / Black
BK :