



Main

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay REXL 2 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	5 A with bus jumper 12 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 2 x 0.5...2 x 1.5 mm ² AWG 20...AWG 16) solid without cable end Connector, 1 x 0.25...1 x 2.5 mm ² AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² AWG 20...AWG 14) solid without cable end
Tightening torque	< 1 N.m M3
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Maximum Width	1.06 in (27 mm)
Net Weight	0.13 lb(US) (0.058 kg)

Environment

Standards	IEC 61984
Product certifications	CSA Lloyd's UL
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP20 EN/IEC 60529
Dielectric strength	2500 V

Ordering and shipping details

Category	21128 - ZELIO ICE CUBE RELAY ACCESSORIES
Discount Schedule	CP2
GTIN	00785901437871
Nbr. of units in pkg.	10
Package weight(Lbs)	0.1 lb(US) (0.05 kg)
Returnability	Yes
Country of origin	CN

Packing Units

Package 1 Height	0.610 dm
Package 1 width	0.270 dm
Package 1 Length	0.750 dm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Socket

Socket with Separate Contact Terminals and Connector for 2 Timed C/O Contacts

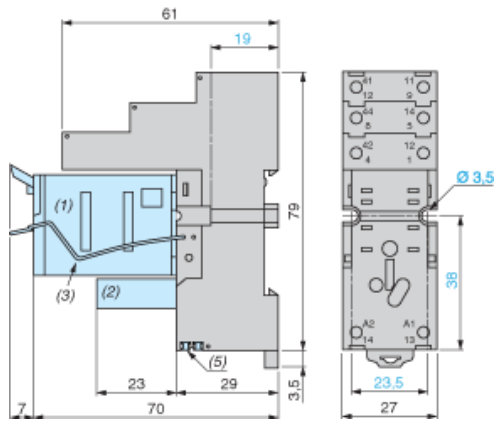

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection