



Main

Range of product	Harmony XB6E
Product or component type	Illuminated monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	0.63 in (16 mm)
Sale per indivisible quantity	5
Shape of signaling unit head	Rectangular
Type of operator	latching
Operator profile	White flush
Contacts type and composition	1 C/O
Contact operation	Snap action
Connections - terminals	Faston connectors 2.8 x 0.5 mm Soldered connectors
Contacts material	Gold-flashed silver
Light source	Integral LED
[Us] rated supply voltage	12 V DC polarised

Complementary

Maximum Height	0.71 in (18 mm)
Maximum Width	0.94 in (24 mm)
Maximum Depth	1.57 in (40 mm)
Terminals description ISO n°1	(13-14-11-12)OF
Net Weight	0.01 lb(US) (0.006 kg)
Overvoltage category	II IEC 60536
Operating position	Any position
Marking	CE
Operating force	1.3 N C/O changing electrical state
Mechanical durability	250000 cycles
Short-circuit protection	3 A cartridge fuse gG
[Ith] conventional free air thermal current	3 A
[Ui] rated insulation voltage	250 V 2)IEC 60947-1
[Uimp] rated impulse withstand voltage	2.5 kV IEC 60947-1
Electrical durability	50000 Cycles, DC-12, 1 A 30 V IEC 60947-5-1 appendix C 50000 Cycles, AC-12, 0.5 A 125 V IEC 60947-5-1 appendix C 50000 cycles, AC-12, 0.5 A 250 V IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda = 10\exp(-8)$ 5 V 1 mA with confidence level of 90 % IEC 60947-5-4
Signalling type	Steady
Current consumption	20 mA
Service life	50000 h

Environment

Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	14...131 °F (-10...55 °C)
IP degree of protection	IP65 IEC 60529
Standards	UL 508 IEC 60947-1 JIS C 852 CSA C22.2 No 14 IEC 60947-5-1 JIS C 4520
Product certifications	CCC CURus
Vibration resistance	1 mm 5...55 Hz)IEC 60068-2-6 9 gn 5...55 Hz)IEC 60068-2-6
Shock resistance	20 gn 11 ms) half sine wave acceleration IEC 60068-2-27
Electromagnetic compatibility	Electrostatic discharge immunity test 8 kV IEC 61000-4-2

Ordering and shipping details

Category	22459 - PUSHBUTTONS, 16MM
Discount Schedule	CS2
GTIN	03389110631159
Nbr. of units in pkg.	5
Package weight(Lbs)	0.12 lb(US) (0.05 kg)
Returnability	No
Country of origin	CN

Packing Units


Package 1 Height	0.280 dm
Package 1 width	0.730 dm
Package 1 Length	1.850 dm

Contractual warranty

Warranty	18 months
----------	-----------

Pushbutton

Rectangular Head

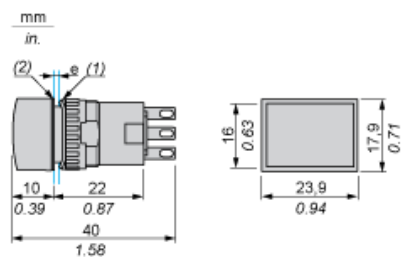

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)
(2) Seal (thickness: 0.5 mm / 0.01 in.)
e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

Panel Cut-Out and Mounting

Rectangular Head

