



### Main

|                                    |                                                                        |
|------------------------------------|------------------------------------------------------------------------|
| Range of product                   | Harmony XVB Universal                                                  |
| Product or component type          | Complete beacon                                                        |
| Beacon or indicator bank unit type | Base unit direct or tube fixing<br>Illuminated unit                    |
| Signalling type                    | Flashing                                                               |
| Mounting diameter                  | 2.76 in (70 mm)                                                        |
| Component name                     | XVBL                                                                   |
| Material                           | Glass reinforced polyamide base unit<br>Polycarbonate illuminated unit |
| Light source                       | Integral flash discharge tube, red                                     |
| Bulb type                          | Flash discharge tube                                                   |
| [Us] rated supply voltage          | 120 V AC                                                               |

### Complementary

|                                        |                                                                  |
|----------------------------------------|------------------------------------------------------------------|
| Connections - terminals                | Screw clamp terminals, <= 1 x 1.5 mm <sup>2</sup> with cable end |
| [Ui] rated insulation voltage          | 250 V IEC 60947-1                                                |
| Nominal voltage limit                  | 0.85...1.1 Un IEC 60947-5-1                                      |
| Current consumption                    | < 290 mA AC                                                      |
| [Uimp] rated impulse withstand voltage | 4 kV IEC 60947-1                                                 |
| Flash energy                           | 10 J                                                             |
| Flashing frequency                     | 1 Hz                                                             |
| CAD overall width                      | 2.76 in (70 mm)                                                  |
| CAD overall height                     | 9.13 in (232 mm)                                                 |
| CAD overall depth                      | 2.76 in (70 mm)                                                  |
| Terminals description ISO n°1          | (GND)GROUND<br>(COM-1)PW                                         |
| Net Weight                             | 1.01 lb(US) (0.46 kg)                                            |

### Environment

|                                     |                                                                      |
|-------------------------------------|----------------------------------------------------------------------|
| Product certifications              | CCC<br>UL 508<br>GOST<br>CSA C22-2 No 14                             |
| Standards                           | EN/IEC 60947-5-1                                                     |
| Protective treatment                | TC                                                                   |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C)                                           |
| Electrical shock protection class   | Class I on support tube IEC 61140<br>Class II on base unit IEC 61140 |
| IP degree of protection             | IP65 on fixing base XVBZ0. IEC 60529<br>IP66 on base unit IEC 60529  |
| NEMA degree of protection           | NEMA 4X UL 508 indoor)                                               |

### Ordering and shipping details

|                       |                         |
|-----------------------|-------------------------|
| Category              | 22611 - XVB-STACKLIGHTS |
| Discount Schedule     | XV                      |
| GTIN                  | 00785901844853          |
| Nbr. of units in pkg. | 1                       |
| Package weight(Lbs)   | 0.99 lb(US) (0.45 kg)   |

|                   |     |
|-------------------|-----|
| Returnability     | Yes |
| Country of origin | CZ  |

## Packing Units

|                        |                   |
|------------------------|-------------------|
| Unit Type of Package 1 | PCE               |
| Package 1 Height       | 9.92 in (25.2 cm) |
| Package 1 width        | 3.15 in (8 cm)    |
| Package 1 Length       | 3.15 in (8 cm)    |

## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                 |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                        |
| Mercury free               | Yes                                                                                                                                                                                                                                                                   |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                                                                                                                                                                |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                         |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.                                                                                                                                          |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Illuminated Beacon with “Flash” Discharge Tube Unit

---

Dimensions

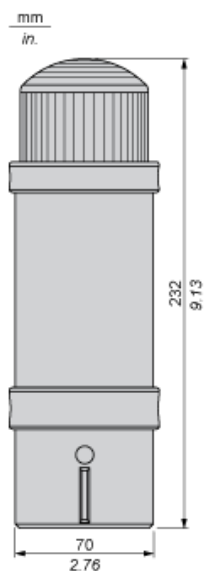

---

## Illuminated Beacon

---

### Wiring Diagram

