



### Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	4.17 in (106 mm)
IP degree of protection	IP55 IEC 60529 with accessory) IP23 IEC 60529
[Us] rated supply voltage	24 V AC/DC
Light source	High luminosity LED, blue

### Complementary

Material	ABS (acrylonitrile butadiene-styrene) body part PMMA (polymethyl methacrylate) globe
CAD overall width	4.17 in (106 mm)
CAD overall depth	4.17 in (106 mm)
Net Weight	1.10 lb(US) (0.5 kg)
Marking	CE
Product mounting	By 3 M4 screws
Supply voltage limits	19...30 V DC 21.6...26.4 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	125 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm <sup>2</sup>
AWG gauge	AWG 18
Cable length	15.75 in (400 mm)

### Environment

Standards	EN 61000-6-2 EN 61000-6-4
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140

### Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901964681
Nbr. of units in pkg.	1
Package weight(Lbs)	1.36 lb(US) (0.62 kg)
Returnability	No
Country of origin	ID

## Packing Units

Package 1 Height	1.950 dm
Package 1 width	1.380 dm
Package 1 Length	1.400 dm

## Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Rotating Mirror Beacon

### Dimensions

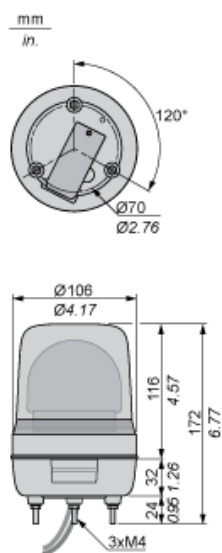

---

Rotating Mirror Beacon

---

Panel Cut-out

