
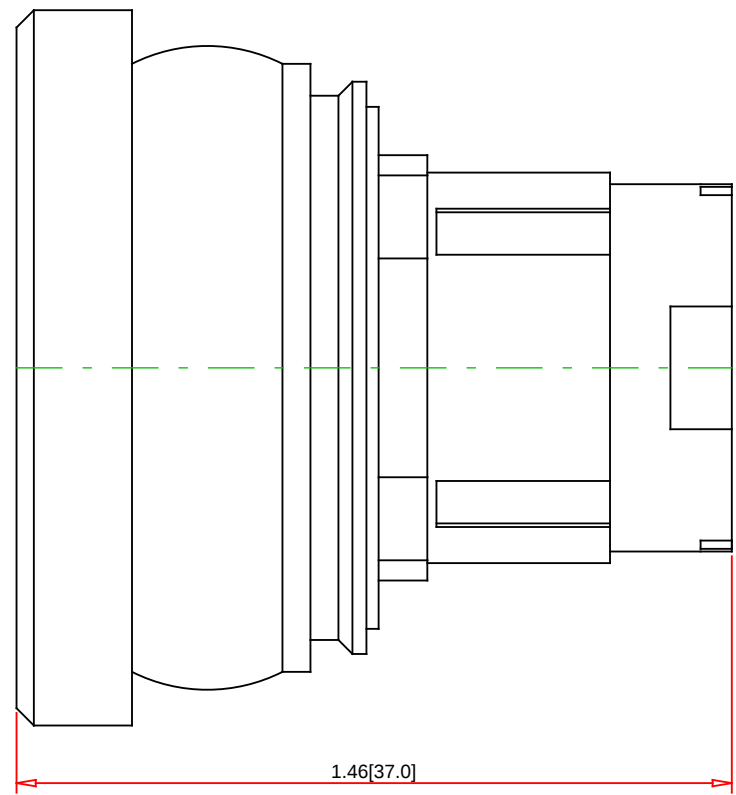


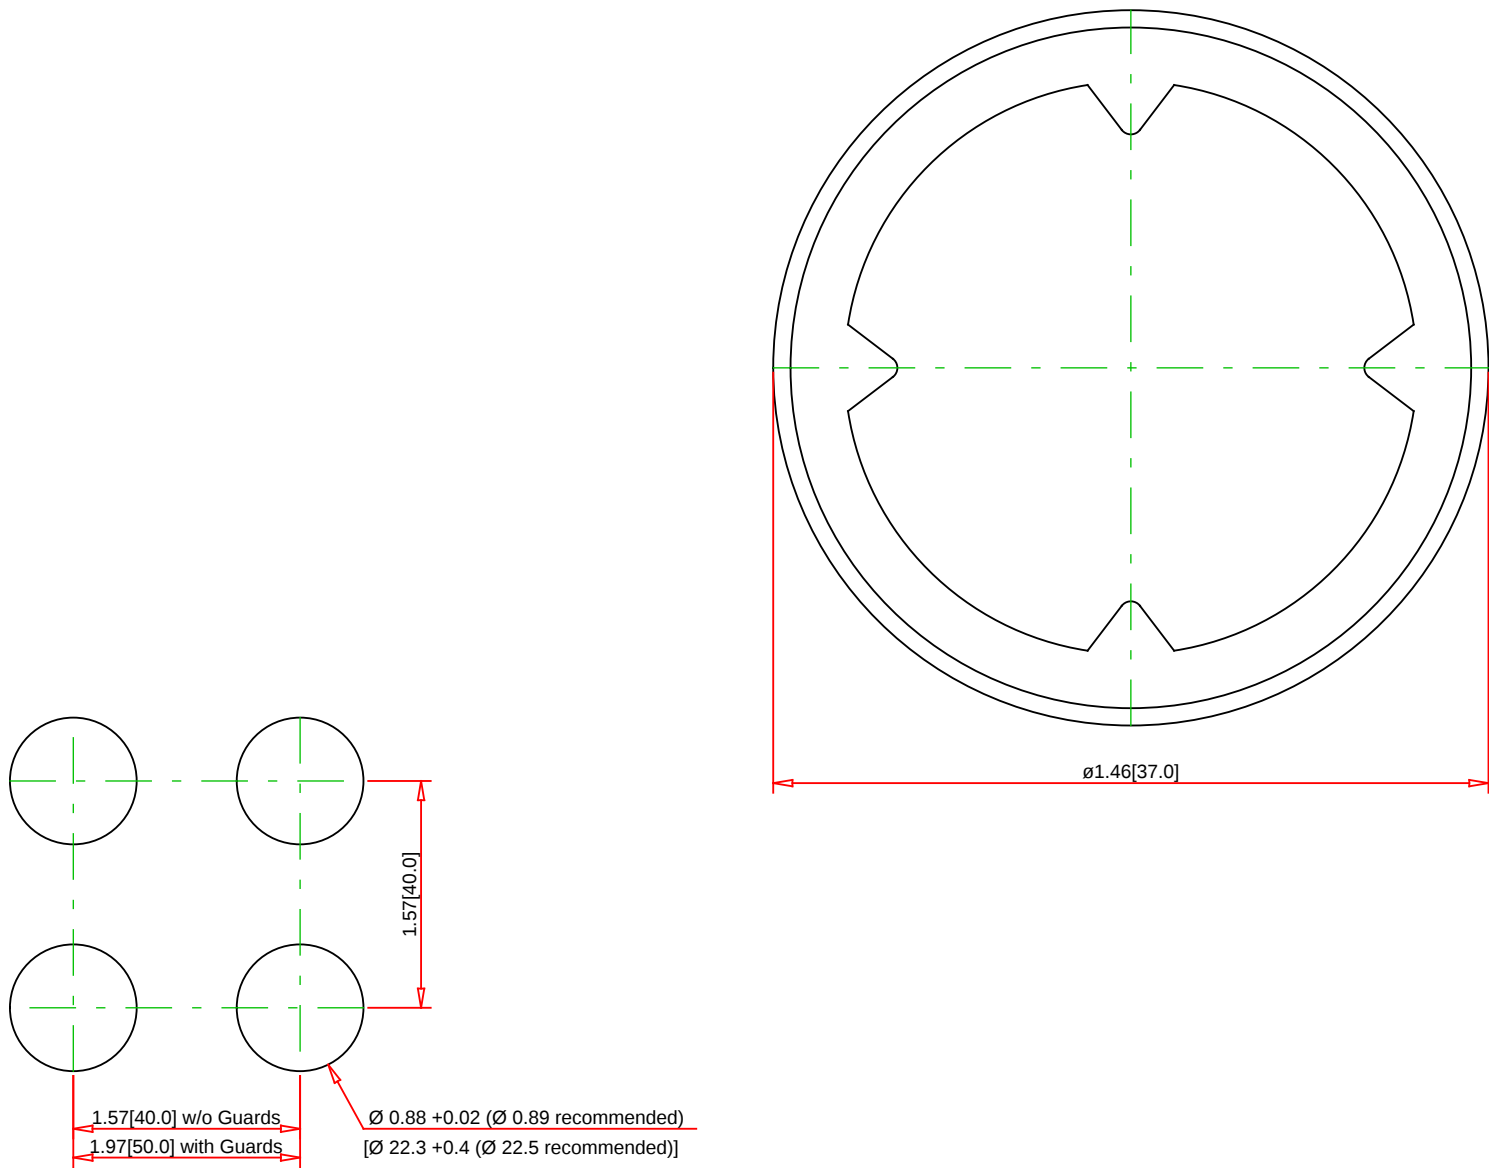

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]		Part No.: ZB4BC48007		Schneider Electric Schneider Electric United States North American Division Boston One Campus 800 Federal Street Andover, MA 01810, USA Phone: +1 8773425173 Email: CCC@us.schneider-electric.com			
UL Cert.: CSA Cert.: CE Cert.: IP Protection: NEMA Protection: IK Protection: Ambient Air Temp. (for storage): Ambient Air Temp. (for operation): Electric Shock Protection: Washdown Resistance (in Pa):		Technical Information: E164353 CCN NKCR LR44087 Class 3211 03 CE per IEC P 66 IP 69K NEMA 4, 12, 13 IK03 -40 to +85 °C -40 to +70°C Class I 90 Pa		Description: Mechanical Durability (in operating cycles): Vibration Resistance: Mechanical Shock Resistance: Color: Button Marking:		Specification: 22MM HARSH PB, RED, W/ "STOP" MARKING 3000000 5 gn 30 gn Red STOP	