
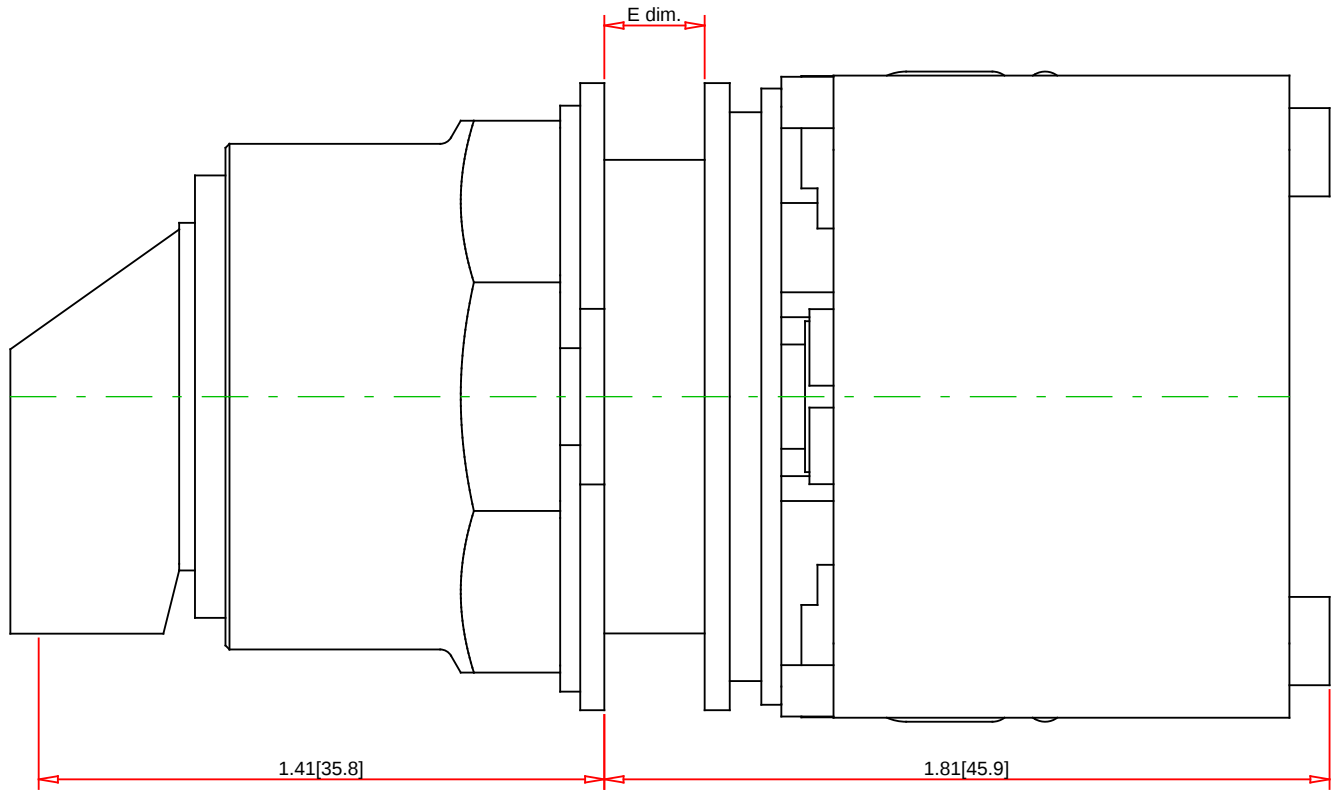


| Panel Thickness<br>E dim.<br>inches (mm) | Number<br>of<br>Gasket |
|------------------------------------------|------------------------|
| 1/16 (1.6)                               | 4                      |
| 1/8 (3.2)                                | 3                      |
| 3/16 (4.8)                               | 2                      |
| 1/4 (6.4)                                | 1                      |

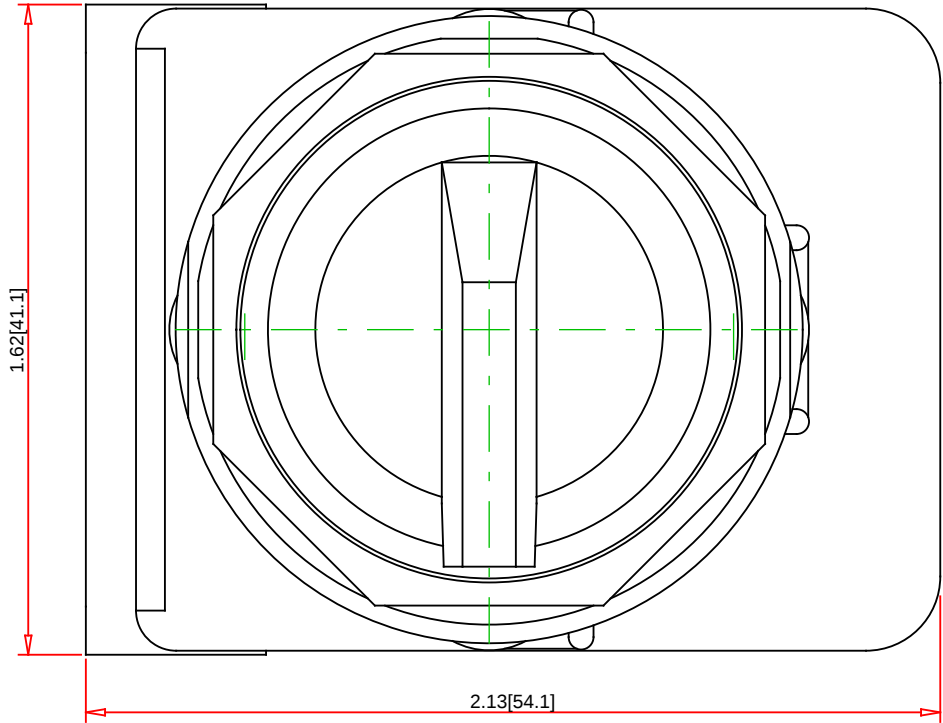

Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

9001SK72J35A



Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone:+1 8773425173  
Email: CCC@us.schneider-electric.com

Technical Information:

UL File: E78403 CCN NKCR  
CSA File: LR24590 Class 3211-03  
CE Marked: Yes  
RoHS: Yes  
NEMA / IP Rating: NEMA 1/2/3/3R/4/4X/6/12/13 Water tight, Dust tight, Oil tight and Corrosion Resistant (Indoor/Outdoor)  
Key Number: n/a  
Key Removal: n/a  
Light Module Supply Voltage: 24/28V  
Light Module Type: Full Voltage  
Number of Operators: 1

Description:  
Ring Nut Material:  
Operator Type:  
Operator Action:  
Guard Type:  
Button/Cap Color:  
Lens Type:  
Lens Color:  
Knob Type:  
Knob Color:  
Number of Positions:

30mm Selector Switch  
Black Plastic  
Illuminated  
Spring Return (From Right to Center)  
n/a  
n/a  
n/a  
not applicable  
not applicable  
Standard Knob  
Amber  
3

Specification: