
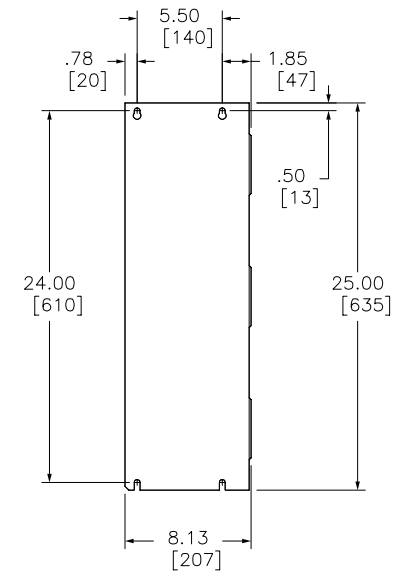


MAXIMUM HORSEPOWER RATINGS				MOUNTING DEPTH
AC SYSTEMS VOLTS (MOTOR VOLTS)				
208 (200)	240 (230)	480 (460)	600 (575)	15.87-19.00 INCHES
75	125	250	350	

MOUNTING DEPTH MEASURED FROM SWITCH
MOUNTING SURFACE TO SURFACE OF FLANGE

OPERATING HANDLES 9422-A7 OR A8 IS TO BE
USED WITH THIS DISCONNECT SWITCH 9422-TG2.
9422-TG-2 DISCONNECT SWITCH IS:
FUSIBLE AND ADJUSTABLE DEPTH.
ADJUSTABLE IS STEPS OF 0.63 INCHES.
RIGHT HAND FLANGE MOUNTED ONLY.

DIMENSION X	FUSE TYPE
3.97 [101]	CLASS H 400A, 600V
6.97 [177]	CLASS H 400A, 250V
8.38 [213]	CLASS J, 400A, 600V

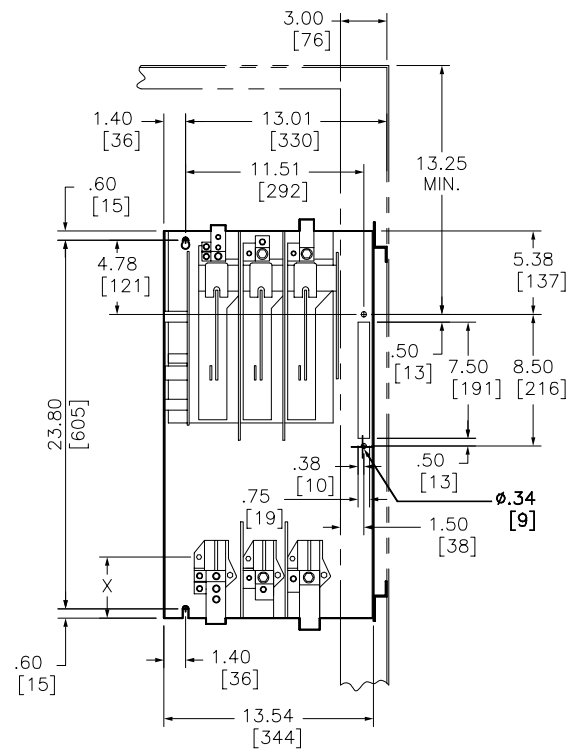

Catalog Number: 9422-TG2
Ratings: 400A
UL File/CCN: E52369/WHTY2
CSA File/Class: LR44199/4652 04
Meets Standards: -
Weight: 63 lbs
Wire Size: #4-500 Kcmil Cu
Terminal torque: -
Mounting Hwd: (6) 5/16-18 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED
HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY
BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY.
USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR
TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE
PROJECTION
TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS ± .01

FUSIBLE DISCONNECT SWITCH
CLASS 9422 TYPE TG2

SQUARE D COMPANY

DWG# 9422 TG_OUTLINE_002
NO.