
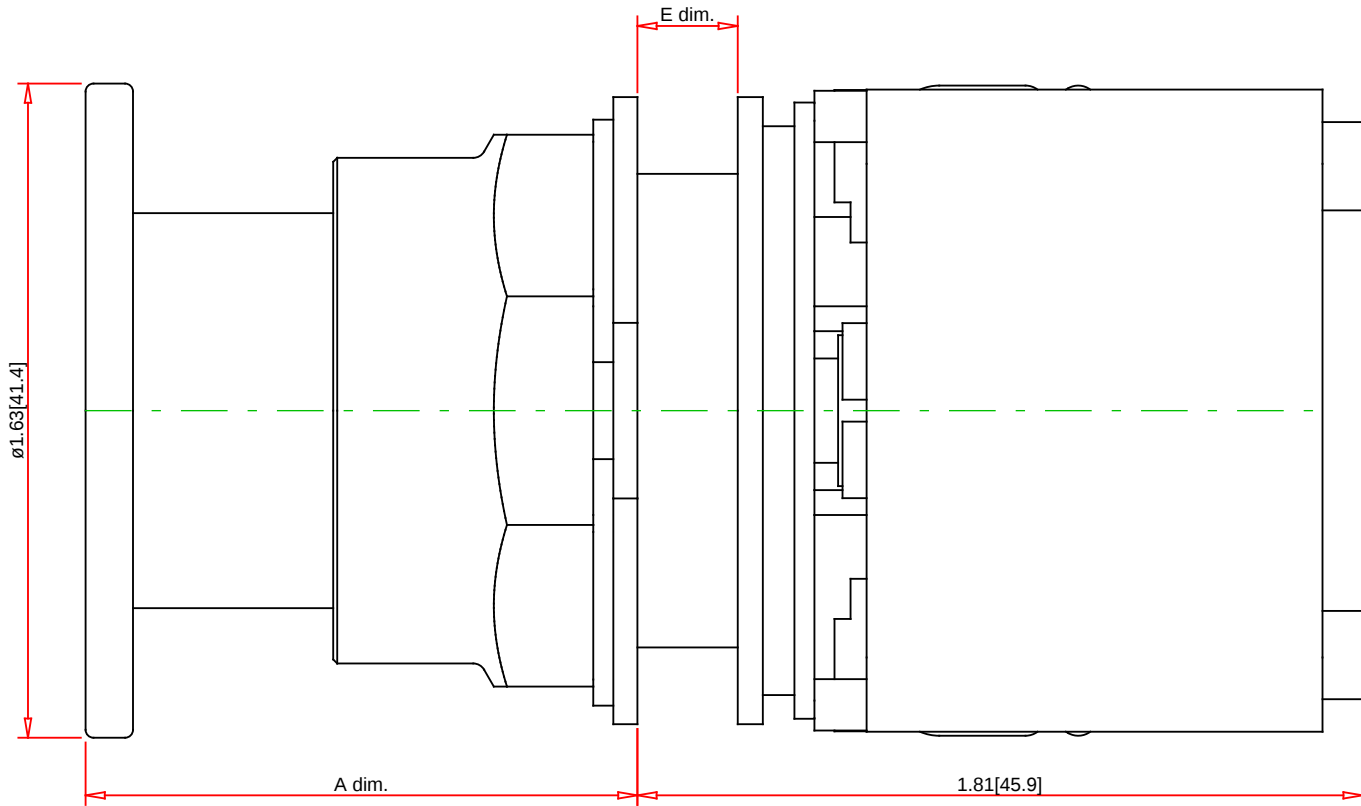


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

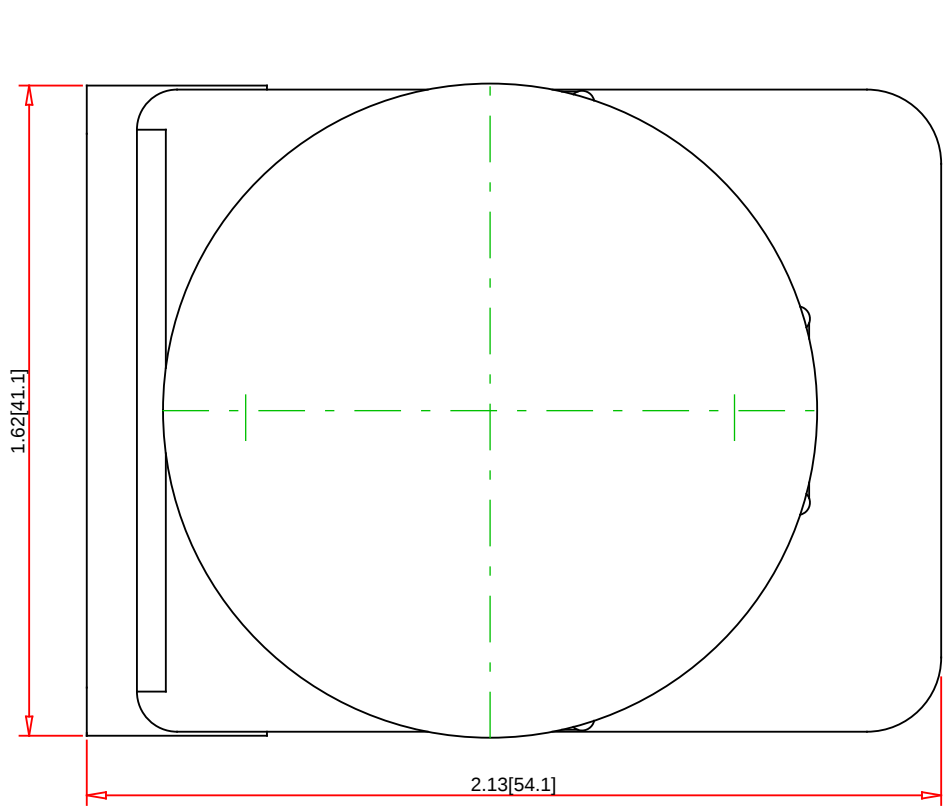

A dim. inches (mm)		
Depressed (Stop)	Midway (Neutral)	Extended (Start)
1 3/8(34.9)	1 9/16 (39.7)	1 3/4 (44.5)

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9001SKR8P38LYA



Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:			Specification:	
UL File:	E78403 CCN NKCR	Description:	30mm Push Button	
CSA File:	LR24590 Class 3211-03	Ring Nut Material:	Black Plastic	
CE Marked:	Yes	Operator Type:	Illuminated	
RoHS:	Yes	Operator Action:	Momentary (Push/Pull) - Maintained (Neutral)	
NEMA / IP Rating:	NEMA 1/2/3/3R/4/4X/6/12/13 Water tight, Dust tight, Oil tight and Corrosion Resistant (Indoor/Outdoor)	Button/Type:	Screw-On Plastic Mushroom (1.63 Inch/41mm)	
Key Number:	n/a	Guard Type:	No Guard	
Key Removal:	n/a	Button/Cap Color:	Amber	
Light Module Supply Voltage:	120V	Lens Type:	not applicable	
Light Module Type:	LED (Yellow)	Lens Color:	not applicable	
Number of Operators:	1	Knob Type:	not applicable	
		Knob Color:	n/a	
		Number of Positions:	3	