

## Product data sheet

### Characteristics

## 2601AG2

Switch, reversing drum, 2 HP at 230 VAC  
single phase, 2 HP at 575 VAC polyphase,  
handle operated, NEMA 1 enclosure



### Main

Product	Reversing Drum Switch
Enclosure Rating	NEMA 1
Horsepower	1.5 Hp 115 V AC, 1 phase 2 Hp 230 V AC, 1 phase 2 Hp 200 V AC, 3 phase 2 Hp 230 V AC, 3 phase 2 Hp 460 V AC, 3 phase 2 Hp 575 V AC, 3 phase 0.25 Hp 115 V DC 0.25 hp 230 V DC
Maximum Rated Voltage	600 V AC 250 V DC
Number of Poles	3P

### Complementary

Certifications	UL Listed CSA
Electrical Connection	Screw-clamp terminals
Type	A
Width	2.68 in (68.07 mm)
Height	5.38 in (136.65 mm)
Depth	4.61 in (117.09 mm)
Product weight	1.34 lb(US) (0.61 kg)

### Ordering and shipping details

Category	21116 - 2601
Discount Schedule	CP1
GTIN	00785901555414
Nbr. of units in pkg.	1
Package weight(Lbs)	1.25 lb(US) (0.57 kg)
Returnability	Yes
Country of origin	MX

### Packing Units

Package 1 Height	4.60 in (11.684 cm)
Package 1 width	5.50 in (13.970 cm)
Package 1 Length	7.10 in (18.034 cm)


### Offer Sustainability

EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

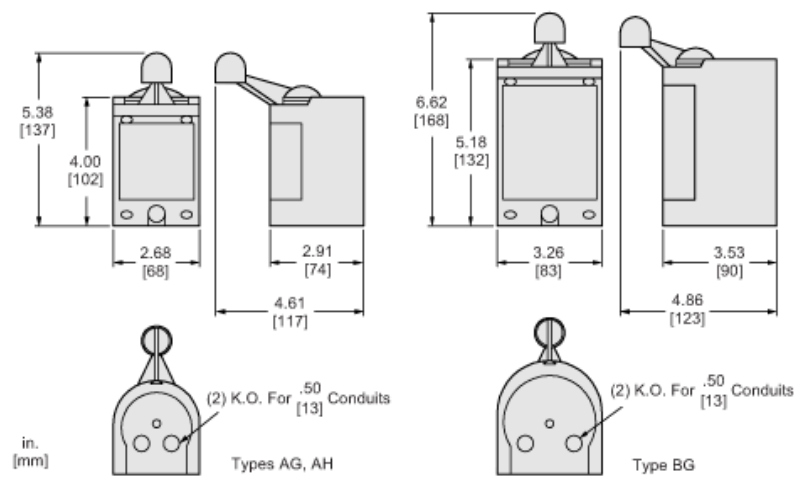

Connections and Wiring Diagrams

