


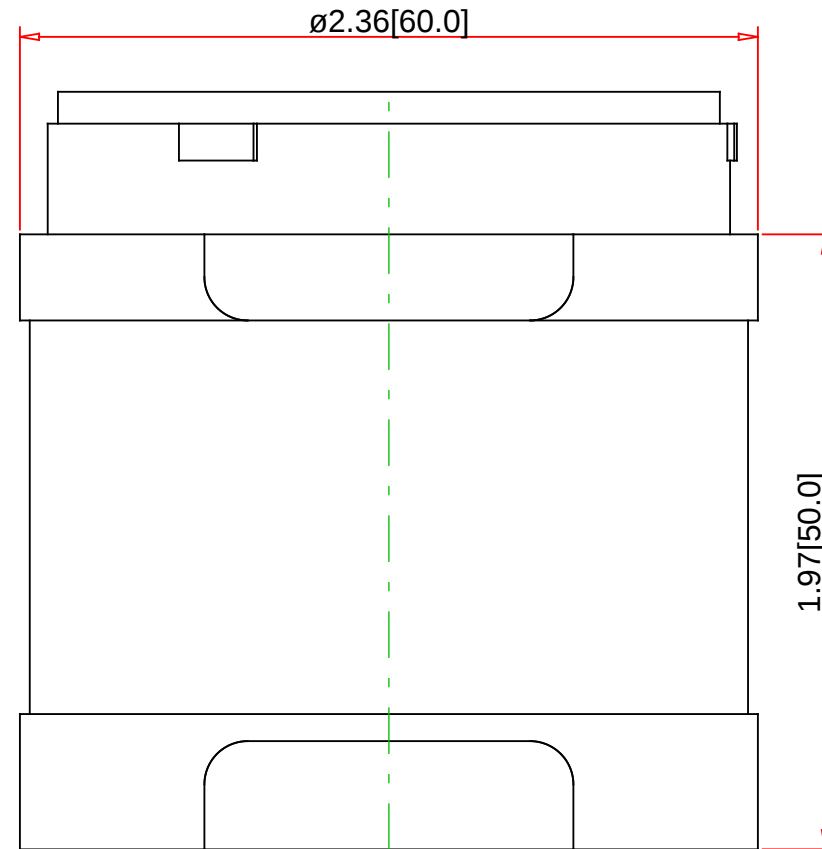


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XVUC48

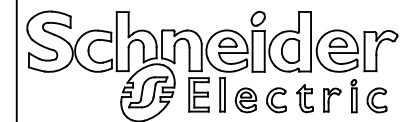

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Agency Approvals: UL, CSA, CE, RoHS
Ingress Protection: IP 65
Rated Voltage: 24V AC/DC
Power Consumption: 50 mA Max.
Sound Level :
Frequency of Buzzer:
Color of Lights: Yellow
Light Source: LED
Frequency of Flashing Lights:
El. Shock Res. EN/IEC 61140:
Storage Temperature: -40~+70°C
Operating Temperature: -25~+50°C

Specification:

Description: 60mm Tower Y LED Unit 24VAC/DC, Flashing
Material - Lens Unit: PC(UL94 V-2)
Material - closure plate: PC(UL94 V-0)
Material - Body:
Material - Pole:
Material -terminal cover: