


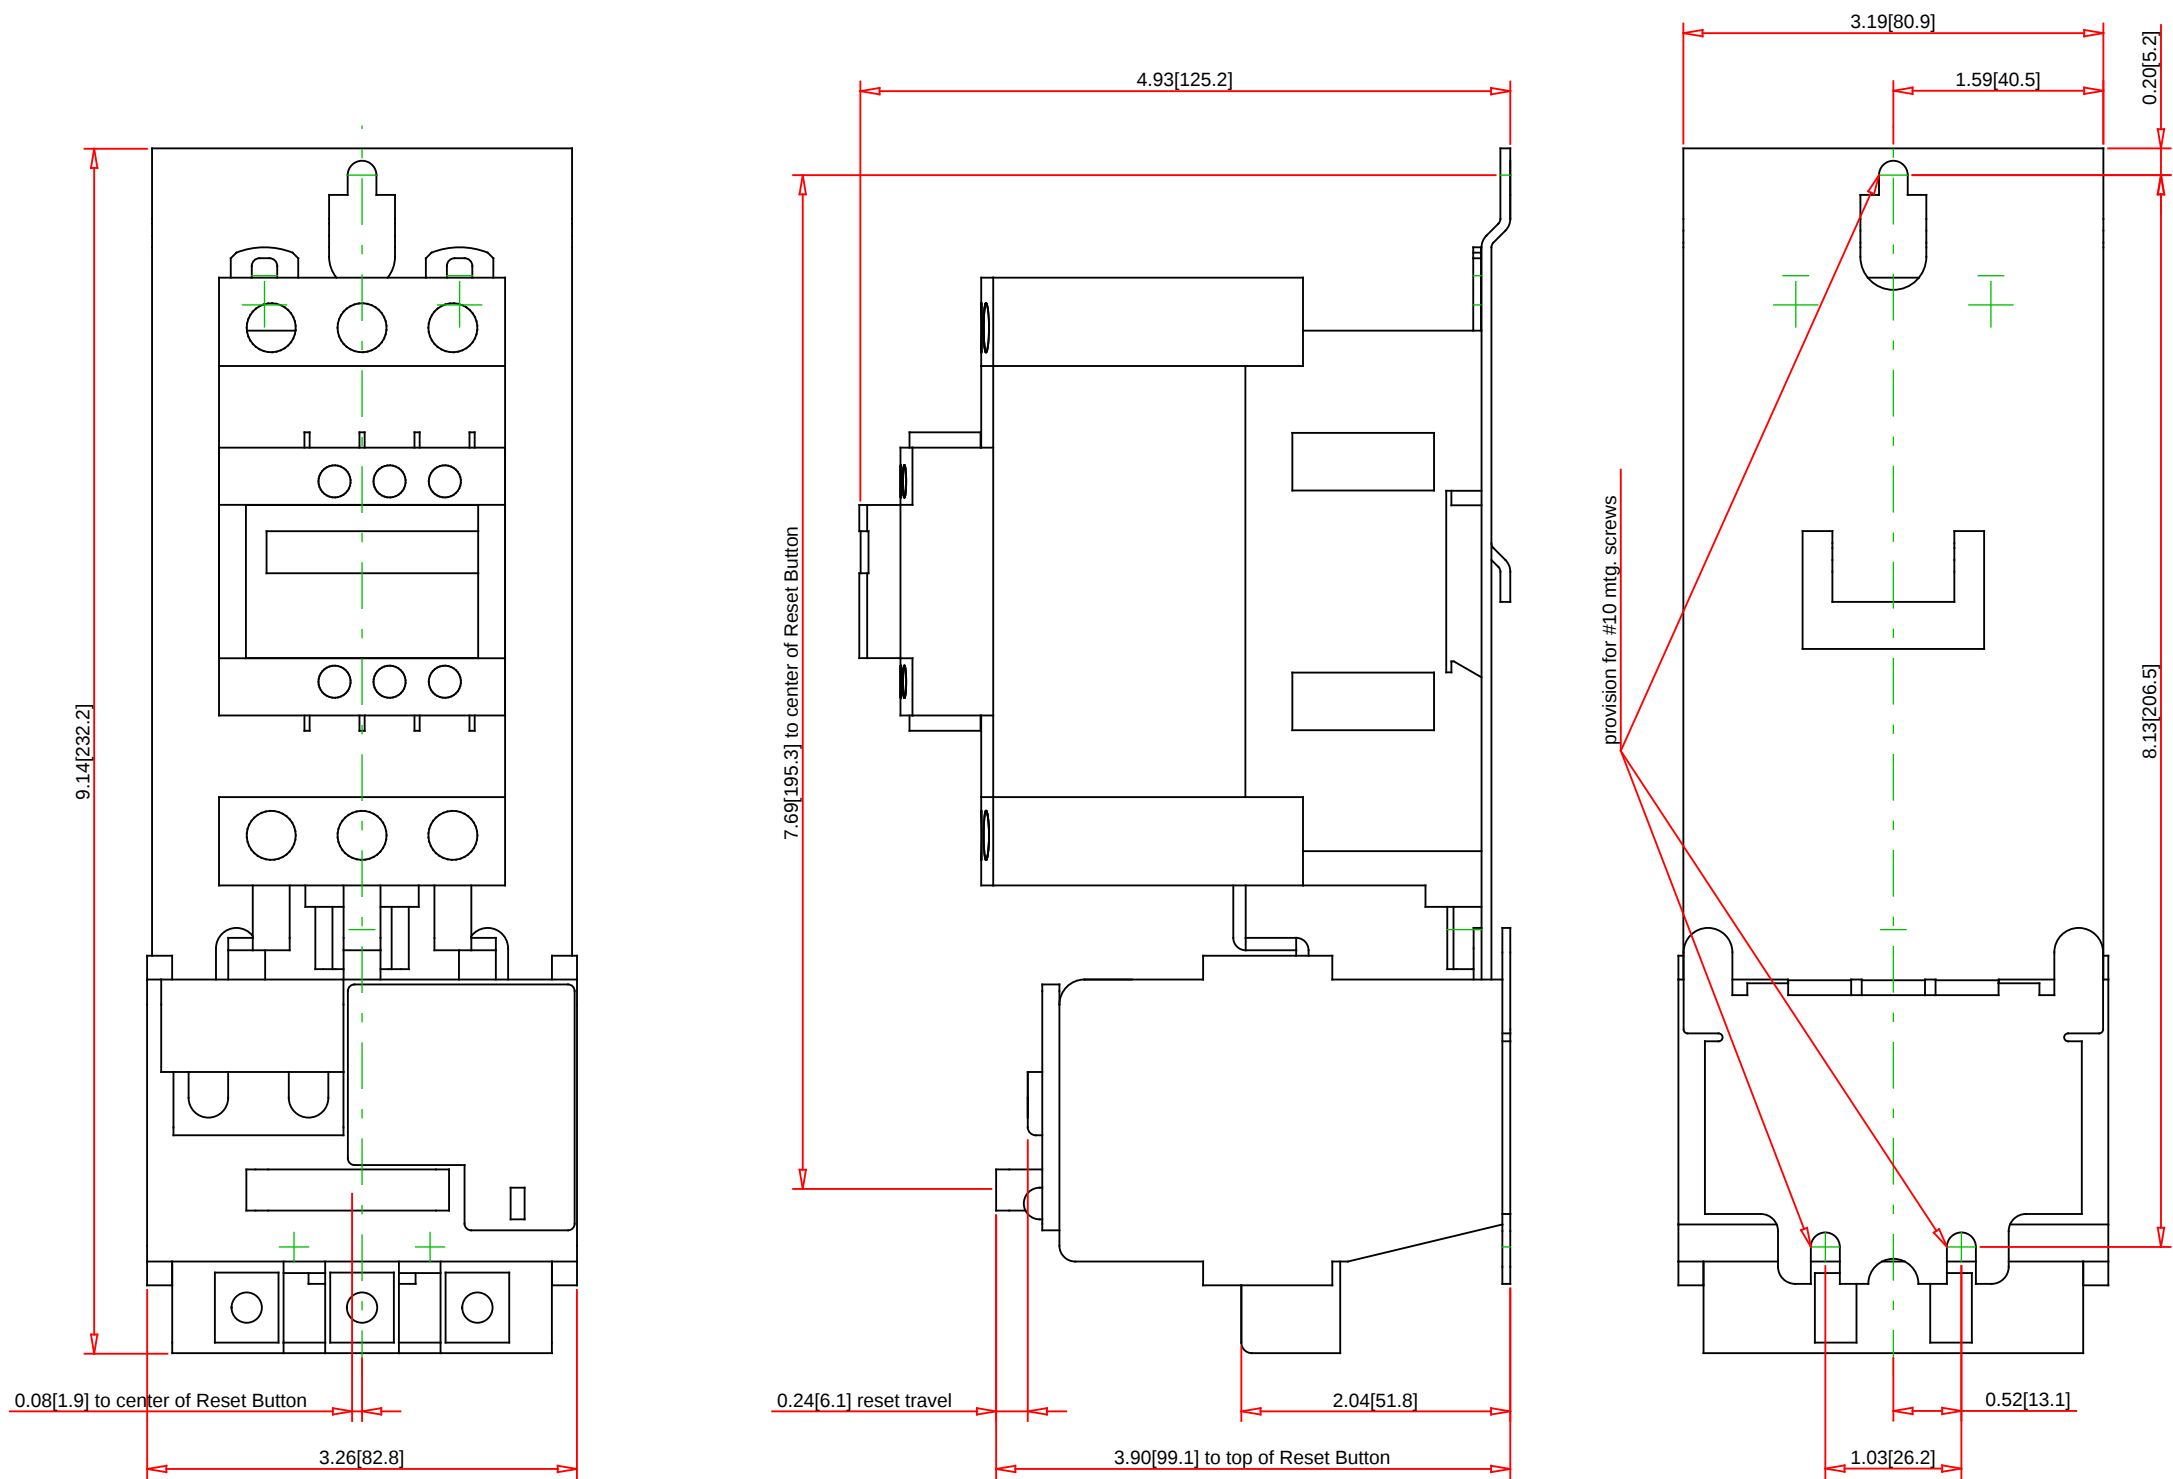

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
T36DN13G7S

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:	
Max. Continuous Current Rating:	600V / 45A
Certifications:	UL Listed, CSA, CE
RoHS:	Yes
Termination Method:	Power Line: Screw Clamp, Power Load: Lug, Control Circuit: Screw Clamp
Weight (lbs):	8.1
Power Line Size (AWG):	#4 - #16
Power Load Size (AWG):	#4 - #14
Control Wire Size (AWG):	#12 - #16
Thermal Overload Type:	Motor Logic Solid State
Thermal Overload Trip Class:	Class 10/20 Selectable
Mounting:	Panel

Description		Specification:			
TeSys N Sz 2 open starter, 3 pole, 120 VAC, Separate Control					
Type		FVNR			
Voltages Code:		G7 at 120VAC			
Control Type:		Separate Control			
Coil Consumption:		Inrush 160 VA Sealed 15 VA			
Single Phase			Three Phase		
115V	230V	200V	230V	460V	575V
3 HP	7.5 HP	10 HP	15 HP	25 HP	25 HP