



### Main

Product or component type	Industrial Control Transformer
Power Rating	250 VA
Primary Voltage	120 V
Secondary Voltage	12/24 V
Type	T

### Complementary

Number of Phases	1 phase
Power Rating	250 VA UL 250 VA CSA 250 VA NOM 160 VA
Primary to Secondary Voltage	120 V 12/24 V
Temperature rise	80 °C
Electrical connection	Screw clamp terminals
Maximum Height	3.2 in (81.28 mm)
Maximum Width	3.75 in (95.25 mm)
Maximum Depth	5.3 in (134.62 mm)
Material	Copper winding
Fingersafe Cover Compatibility	FSC2

### Environment

Product certifications	CSA file LR37055 guide 184-N-90 UL listed file E61239
Enclosure Type	Not rated (open device)
Insulation temperature	266 °F (130 °C)

### Ordering and shipping details

Category	16201 - 9070 T (NOT TF) 250-2000VA
Discount Schedule	CP8
GTIN	00785901905837
Nbr. of units in pkg.	1
Package weight(Lbs)	7.96 lb(US) (3.61 kg)
Returnability	Yes
Country of origin	MX

### Packing Units

Package 1 Height	5.40 in (13.716 cm)
Package 1 width	6.10 in (15.494 cm)
Package 1 Length	7.30 in (18.542 cm)


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes

## Contractual warranty

Warranty	10 Years
----------	----------

Approximate Dimensions

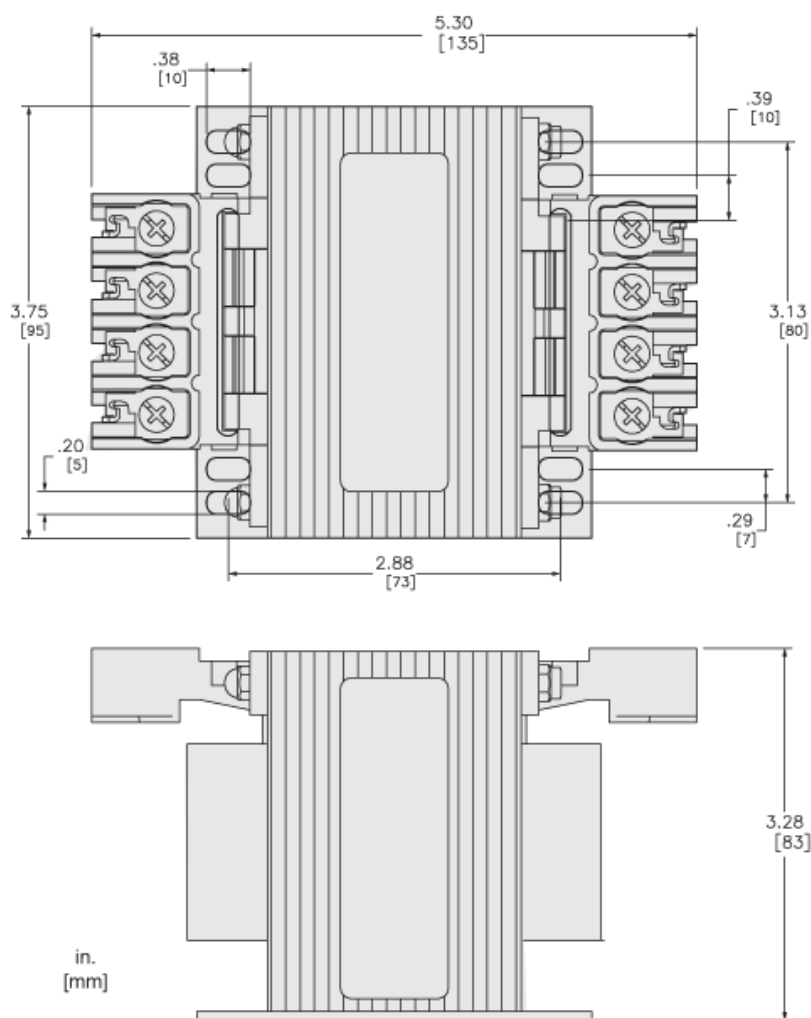

Connections and Wiring Diagrams

Voltage and Connection Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D13	120	12/24	Connect to H1 and H2	12: Connect to X1 and X4 Jumper X1 with X3 Jumper X2 with X4 24: Connect to X1 and X4 Jumper X2 with X3
D36	600		Connect to H1 and H2	
D54	120 x 240		120: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 240: Connect to H1 and H4 Jumper H2 with H3	
D59	240 x 480		240: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 480: Connect to H1 and H4 Jumper H2 with H3	

