

## Product data sheet

### Characteristics

## XVC6B2K

Monolithic tower light, red-orange, 60mm, base mounting, steady, without buzzer, IP54, 24 V AC DC



### Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Sound signalling	Without
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady red LED steady orange
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC

### Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover
Product mounting	On base
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22
Cable length	33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	50 mA
Flashing frequency	1 Hz
Net Weight	0.55 lb(US) (0.25 kg)
Maximum Height	6.33 in (160.8 mm)

### Environment

Standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3 EN/IEC 61000-6-4
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II EN/IEC 61140
IP degree of protection	IP54 flat surface installation EN/IEC 60529

### Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901670902
Nbr. of units in pkg.	1
Package weight(Lbs)	0.95 lb(US) (0.43 kg)
Returnability	No
Country of origin	ID

## Packing Units

Package 1 Height	0.870 dm
Package 1 width	0.870 dm
Package 1 Length	5.050 dm

## Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

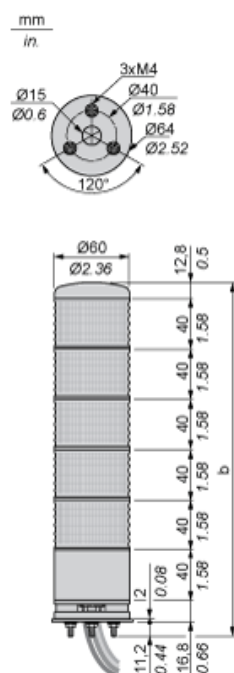

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

---

Pre-assembled and Pre-wired Tower Light

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

