



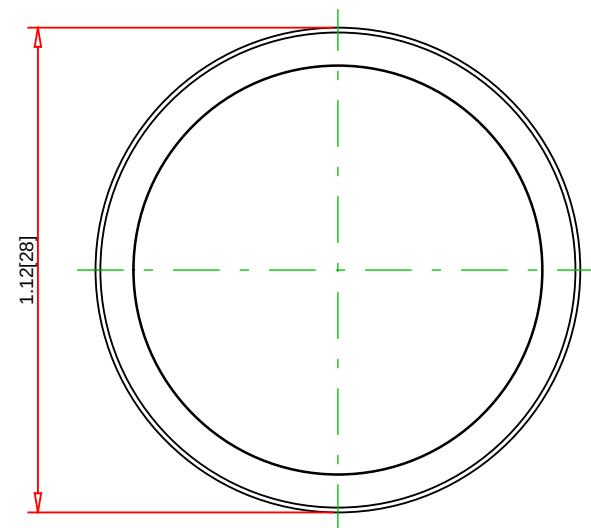

0.74[19]

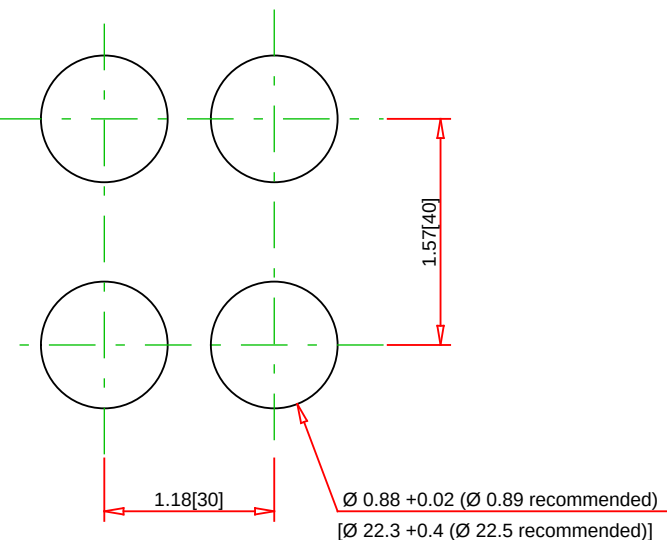


Ø 0.88 +0.02 (Ø 0.89 recommended)
[Ø 22.3 +0.4 (Ø 22.5 recommended)]

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

ZB4BA56

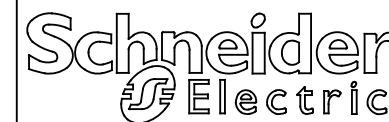

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL Listed: Yes
UL File: E164353 CCN NKCR
CSA Approval: Yes
CSA File: LR44087 Class 3211 03
CE: Yes
RoHS: Yes
Bezel Material: Chromed Zinc
NEMA / IP Rating: NEMA 1/2/3/4/4X/13; IP66
Key Number: n/a
Key Removal: n/a
Max. # of Contact Blocks: 9
Button Marking: none

Description: 22mm Push Button
Operator Type: Non-Illuminated
Operator Action: Momentary
Button Type: guarded
Bezel Type: Metal
Color: Yellow
Head Type: Round

Specification: