
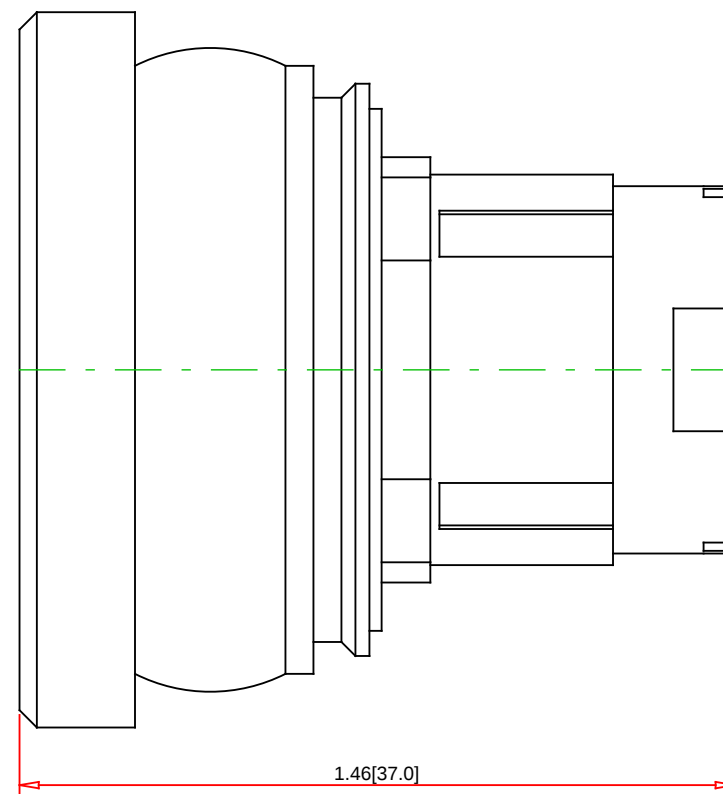
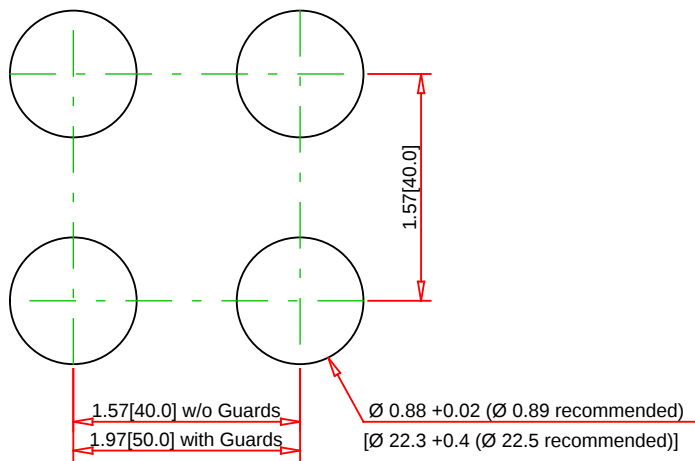


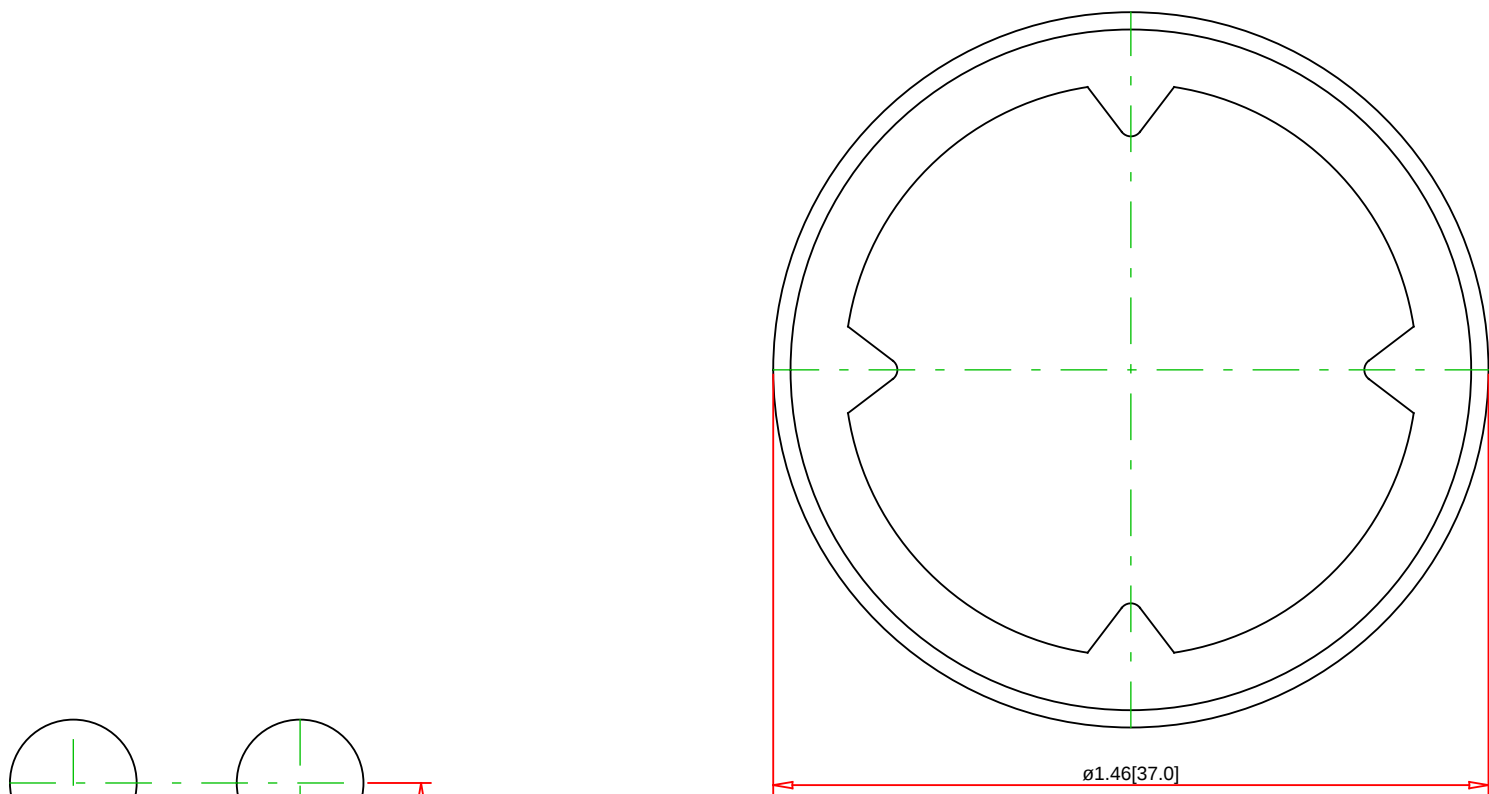

Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:  
**ZB4BC28015**

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 8773425173  
Email: CCC@us.schneider-electric.com

Technical Information:  
UL Cert.: E164353 CCN NKCR  
CSA Cert.: LR44087 Class 3211 03  
CE Cert.: CE per IEC  
IP Protection: P 66 IP 69K  
NEMA Protection: NEMA 4, 12, 13  
IK Protection: IK03  
Ambient Air Temp. (for storage): -40 to +85 °C  
Ambient Air Temp. (for operation): -40 to +70 °C  
Electric Shock Protection: Class I  
Washdown Resistance (in Pa): 90 Pa

Specification:  
Description: 22MM HARSH PB, BLACK, W/ MARKING  
Mechanical Durability (in operating cycles): 3000000  
Vibration Resistance: 5 gn  
Mechanical Shock Resistance: 30 gn  
Color: Black  
Button Marking: w/