
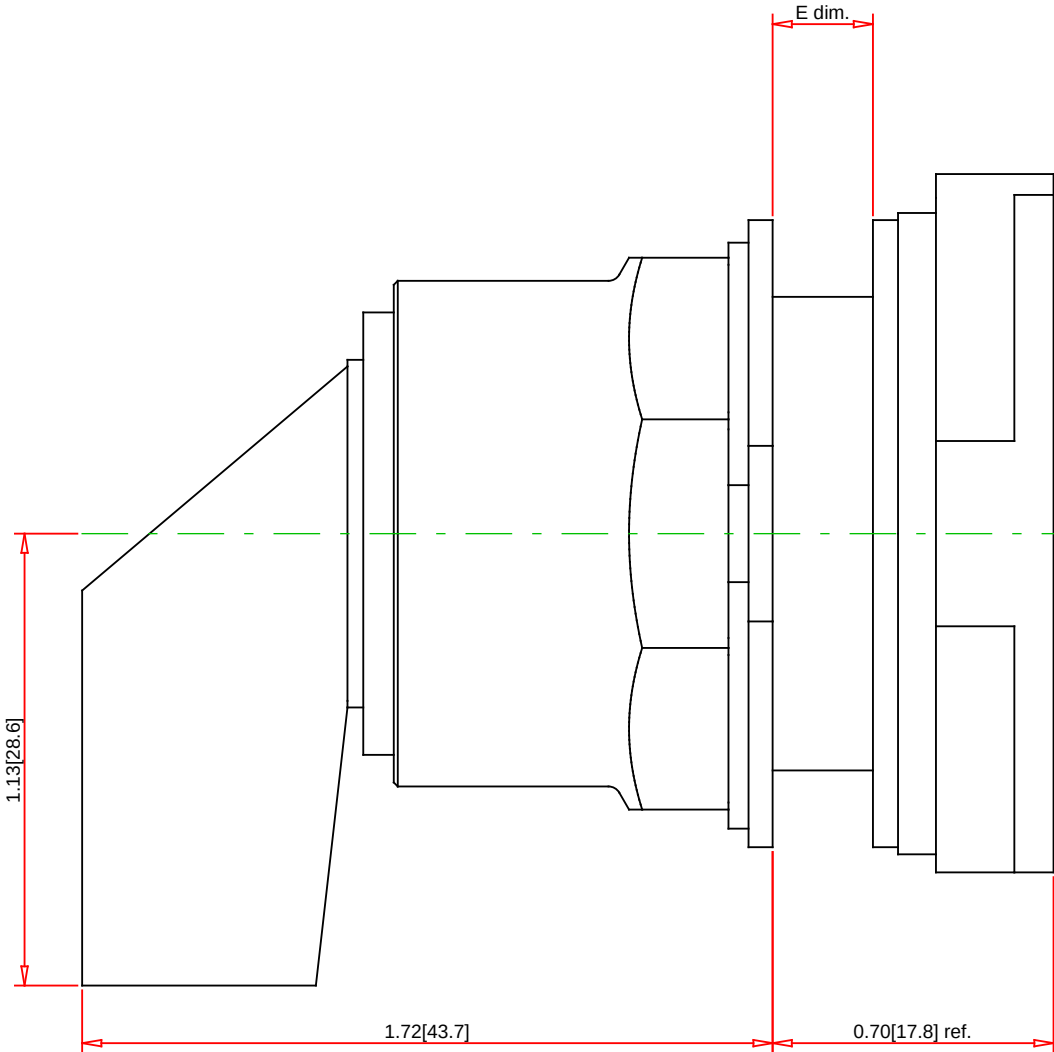


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

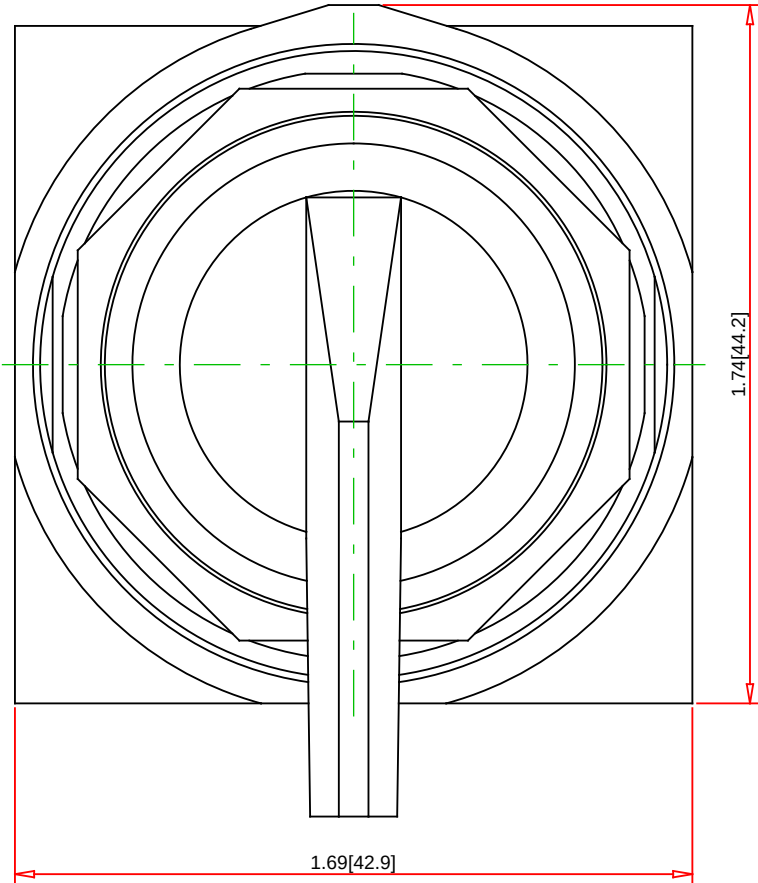


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9001SKS34FB

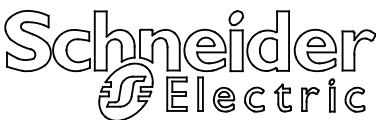

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:		Specification:	
UL File: CSA File: CE Marked: RoHS: NEMA / IP Rating: Key Number: Key Removal: Light Module Supply Voltage: Light Module Type: Number of Operators:	E78403 CCN NKCR LR24590 Class 3211-03 Yes Yes NEMA 1/2/3/3R/4/4X/6/12/13 Water tight, Dust tight, Oil tight and Corrosion Resistant (Indoor/Outdoor) n/a n/a not applicable not applicable 1	Description: Ring Nut Material: Operator Type: Operator Action: Guard Type: Button/Cap Color: Lens Type: Lens Color: Knob Type: Knob Color: Number of Positions:	30mm Selector Switch Black Plastic Non-Illuminated Spring Return (From Right) n/a n/a n/a not applicable not applicable Gloved-Hand Knob Black 2