



## Main

|                                             |                                  |
|---------------------------------------------|----------------------------------|
| Range of product                            | Harmony K                        |
| Product or component type                   | Complete cam switch              |
| Component name                              | K30                              |
| [Ith] conventional free air thermal current | 32 A                             |
| Product mounting                            | Front mounting                   |
| Fixing mode                                 | 4 holes                          |
| Cam switch head type                        | With front plate 64 x 64 mm      |
| Type of operator                            | Black handle                     |
| Rotary handle padlocking                    | Without                          |
| Presentation of legend                      | With metallic, 0 - 1 black       |
| Cam switch function                         | Switch                           |
| Return                                      | Without                          |
| Off position                                | With Off position                |
| Poles description                           | 6P                               |
| Switching positions                         | Right: 0° - 60°                  |
| IP degree of protection                     | IP40 IEC 529<br>IP40 NF C 20-010 |

## Complementary

|                                        |                                                                                                                           |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Switching angle                        | 60 °                                                                                                                      |
| [Ui] rated insulation voltage          | 690 V 3)EN 60947-1<br>690 V 3)IEC 60947-1                                                                                 |
| Short-circuit current                  | 5000 A                                                                                                                    |
| Short-circuit protection               | 50 A cartridge fuse gG                                                                                                    |
| [Uimp] rated impulse withstand voltage | 6 kV EN 947-1<br>6 kV IEC 947-1                                                                                           |
| Contact operation                      | Slow-break                                                                                                                |
| Positive opening                       | With                                                                                                                      |
| Electrical connection                  | Captive screw clamp terminals flexible 2 x 4 mm <sup>2</sup><br>Captive screw clamp terminals solid 2 x 6 mm <sup>2</sup> |
| Tightening torque                      | 10.62 lbf.in (1.2 N.m)                                                                                                    |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switching capacity in mA | 11000 mA DC 120 V 2 inductive 50 ms)<br>11000 mA DC 180 V 3 inductive 50 ms)<br>11000 mA DC 60 V 1 inductive 50 ms)<br>1200 mA DC 220 V 1 resistive 1 ms)<br>1200 mA DC 440 V 2 resistive 1 ms)<br>1200 mA DC 660 V 3 resistive 1 ms)<br>16000 mA DC 140 V 3 inductive 50 ms)<br>16000 mA DC 48 V 1 inductive 50 ms)<br>16000 mA DC 95 V 2 inductive 50 ms)<br>23000 mA DC 120 V 2 resistive 1 ms)<br>23000 mA DC 180 V 3 resistive 1 ms)<br>23000 mA DC 60 V 1 resistive 1 ms)<br>25000 mA DC 30 V 1 inductive 50 ms)<br>25000 mA DC 60 V 2 inductive 50 ms)<br>25000 mA DC 90 V 3 inductive 50 ms)<br>3200 mA DC 110 V 1 inductive 50 ms)<br>3200 mA DC 220 V 2 inductive 50 ms)<br>3200 mA DC 330 V 3 inductive 50 ms)<br>32000 mA DC 140 V 3 resistive 1 ms)<br>32000 mA DC 24 V 1 inductive 50 ms)<br>32000 mA DC 24 V 1 resistive 1 ms)<br>32000 mA DC 48 V 1 resistive 1 ms)<br>32000 mA DC 48 V 2 inductive 50 ms)<br>32000 mA DC 48 V 2 resistive 1 ms)<br>32000 mA DC 70 V 3 inductive 50 ms)<br>32000 mA DC 70 V 3 resistive 1 ms)<br>32000 mA DC 95 V 2 resistive 1 ms)<br>400 mA DC 440 V 1 resistive 1 ms)<br>400 mA DC 660 V 2 resistive 1 ms)<br>6500 mA DC 110 V 1 resistive 1 ms)<br>6500 mA DC 220 V 2 resistive 1 ms)<br>6500 mA DC 330 V 3 resistive 1 ms) |
| Mechanical durability    | 300000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| CAD overall width        | 2.52 in (64 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CAD overall height       | 2.52 in (64 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CAD overall depth        | 4.17 in (106 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Net Weight               | 0.94 lb(US) (0.425 kg)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Environment

|                                       |                                                                                                               |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Standards                             | EN/IEC 60947-3                                                                                                |
| Product certifications                | CULus 120 V 2 hp 1 phase<br>CULus 240 V 5 hp 1 phase<br>CULus 240 V 5 hp 3 phase<br>CULus 480 V 20 hp 3 phase |
| Protective treatment                  | TC                                                                                                            |
| Ambient air temperature for operation | -13...131 °F (-25...55 °C)                                                                                    |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                    |
| Electrical shock protection class     | Class II IEC 60536<br>Class II NF C 20-030                                                                    |

## Ordering and shipping details

|                       |                             |
|-----------------------|-----------------------------|
| Category              | 21446 - 9003 K CAM SWITCHES |
| Discount Schedule     | CS1                         |
| GTIN                  | 03389110080827              |
| Nbr. of units in pkg. | 1                           |
| Package weight(Lbs)   | 0.94 lb(US) (0.43 kg)       |
| Returnability         | No                          |
| Country of origin     | AT                          |

## Packing Units

|                              |                   |
|------------------------------|-------------------|
| Unit Type of Package 1       | PCE               |
| Package 1 Height             | 2.83 in (7.2 cm)  |
| Package 1 width              | 2.83 in (7.2 cm)  |
| Package 1 Length             | 4.53 in (11.5 cm) |
| Unit Type of Package 2       | S03               |
| Number of Units in Package 2 | 30                |

|                  |                         |
|------------------|-------------------------|
| Package 2 Weight | 19.30 lb(US) (8.753 kg) |
| Package 2 Height | 11.81 in (30 cm)        |
| Package 2 width  | 11.81 in (30 cm)        |
| Package 2 Length | 15.75 in (40 cm)        |

### Offer Sustainability

|                            |                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REACH free of SVHC         | Yes                                                                                                                                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                                                                                |
| Mercury free               | Yes                                                                                                                                                                                |
| RoHS exemption information |  Yes                                                                                              |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>                                                           |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.                                                       |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Front Mounting




e support panel thickness 0.5 to 5.5 mm / 0.02 to 0.22 in in.

| a    |      | b  |      | c  |      | D1  |      |
|------|------|----|------|----|------|-----|------|
| mm   | in.  | mm | in.  | mm | in.  | mm  | in.  |
| 66.4 | 2.61 | 58 | 2.28 | 64 | 2.52 | 4.1 | 0.16 |

Panel Cut-Out

Front Mounting




| D2  |      | D3 |      | G1 |      |
|-----|------|----|------|----|------|
| mm  | in.  | mm | in.  | mm | in.  |
| 4.5 | 0.18 | 10 | 0.39 | 48 | 1.89 |

Link Positions (Factory Mounted)

Diagram for 1 to 6-pole Switches

Select the number of poles according to the product characteristics

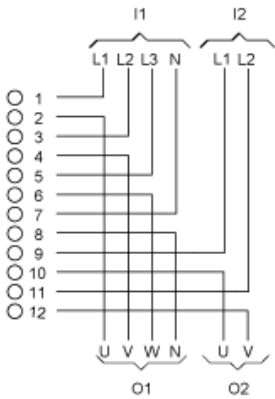

- I1 Input 1
- I2 Input 2
- O1 Output 1
- O2 Output 2

Marking




Angular Position of Switch



Switching Program

Diagram for 1 to 6-pole Switches

Select the number of poles according to the product characteristics



- (1) 1-pole
- (2) 2-pole
- (3) 3-pole
- (4) 4-pole
- (6) 6-pole

## Convention Used for Switching Program Representation

---

 Contact closed

 Contact closed in 2 positions and maintained between the 2 positions

 Sealed assembly for auto-maintain control

 Overlapping contacts

 Spring return position: for a switching angle of  $90^\circ$ , spring return is over  $30^\circ$  after the last position (for a maximum of 3 simultaneous contacts).

Example:

