

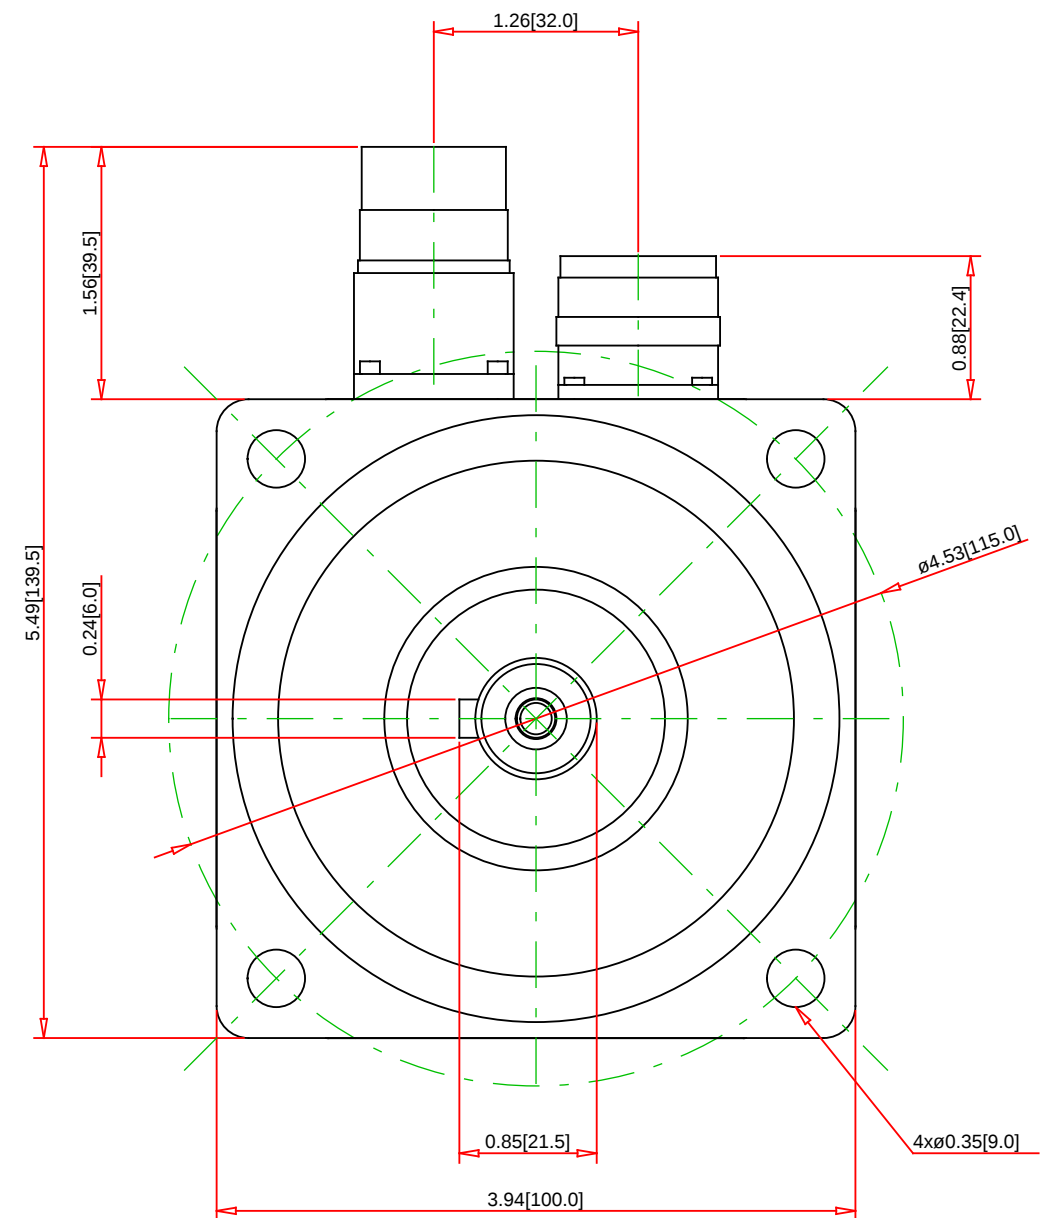


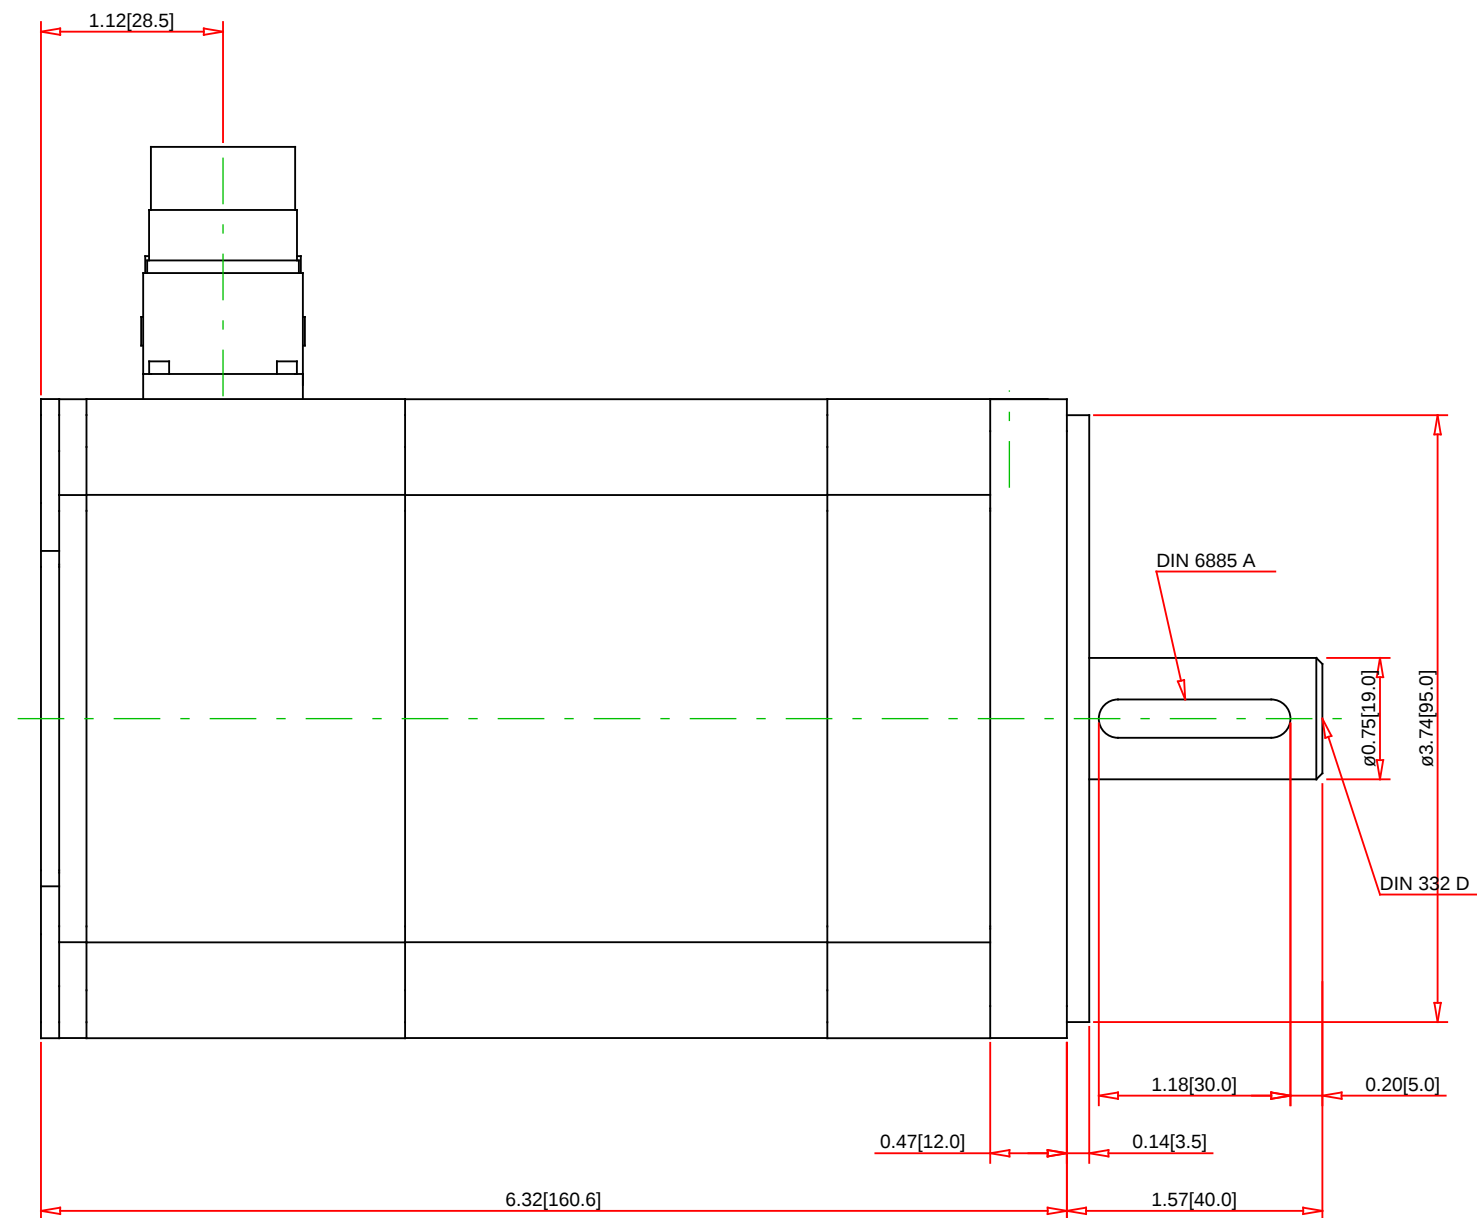

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

BMH1002P31A1A

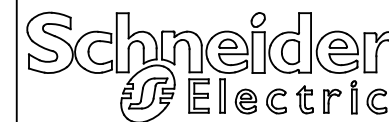

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

Frame Size (mm): 100
Degree of Protection (Shaft / housing): IP65 / I P65
Maximum Current (Arms): 17.5
Holding brake: No
Encoder Type: ABS Single turn 128 Sin/Cos period
Torque Constant (Nm/A): 1.19
CSA: Yes
RoHS: Yes
Weight without brake (kg / lb): 10.85 / 4.92

Description:

Family: BMH
Maximum Permissible Speed (rpm): 6000
Continuous Stall Torque (Nm / lbs-in): 5.0 / 44.3
Peak Torque (Nm / lbs-in): 18.0 / 159.3

Specification: