


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

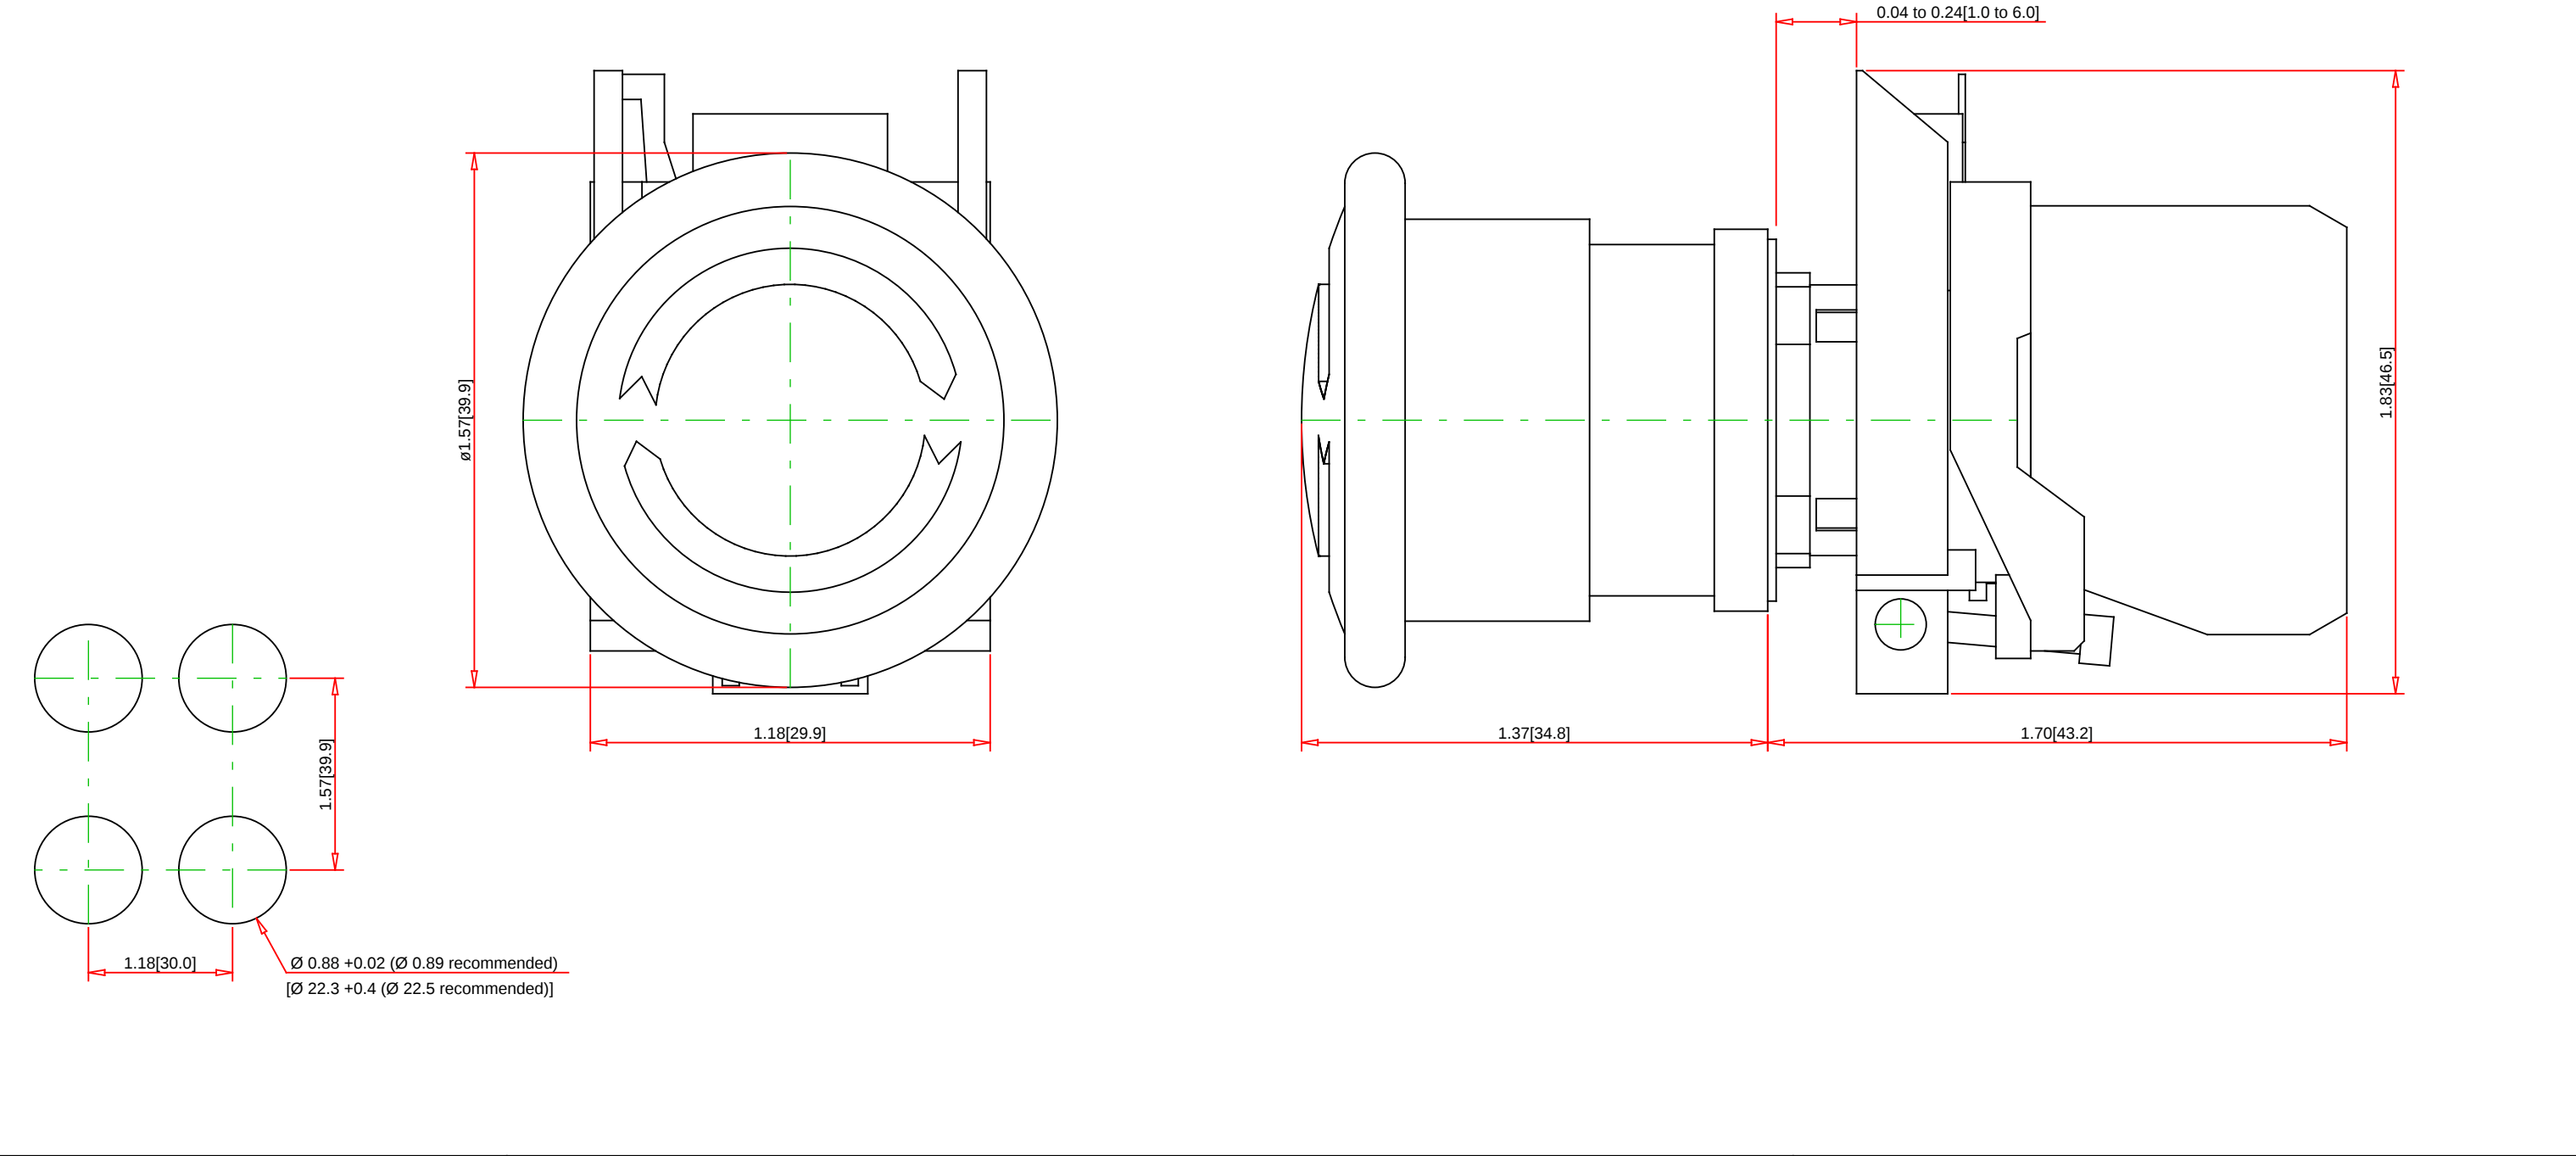

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: XB4AB2	Schneider Electric United States North American Division Boston One Campus 800 Federal Street Andover, MA 01810, USA Phone: +1 8773425173 Email: CCC@us.schneider-electric.com
--	---------------------------------------	---

Technical Information:			
Circuit Configuration:	SPST	Description:	Push Buttons 22 mm - Assemblies
Electrical Life:	100000	Type:	Push Button
Mechanical Life:	5000000	Actuator Type:	Turn to Release
Operating Temp. Range:	-25 to 70 °C (-13 to 158 °F)	Illumination:	None
Power Rating:	Not HP Rated	Terminal Plating:	Copper/Nickel
Number of Poles:	1 N.O. + 1 N.C.	Actuator Color:	Red
AC Voltage:	600	Actuator Part No.:	ZB4BS54
Current Rating:	10	Base and Block Part No.:	ZB4BZ102
Contact Rating:	AC-15: 600V, 1.2A; 240V, 3A; 120V, 6A DC-13: 600V, 0.1A; 250V, 0.27A; 125V, 0.55A		