


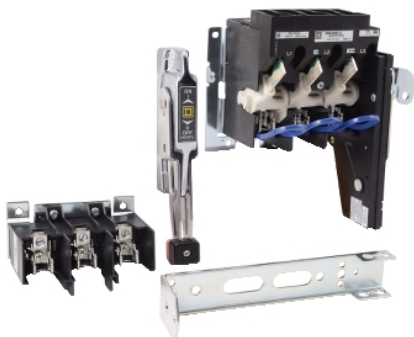

Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Non-fusible disconnect switch

Complementary

Mounting Type	Flange rod variable depth
Current Rating	30 A
Horsepower Rating	7.5 Hp 200 V AC 7.5 Hp 230 V AC 15 Hp 460 V AC 20 Hp 575 V AC 5 hp 250 V DC
Handle Type	6 in handle included NEMA 4/4X enclosures stainless steel

Environment

Certifications	UL Recognized CSA
----------------	----------------------

Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	00785901326526
Package weight(Lbs)	13.96 lb(US) (6.33 kg)
Returnability	No
Country of origin	MX

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------