



### Main

|                           |                           |
|---------------------------|---------------------------|
| Product or component type | Miniature circuit-breaker |
| Range of product          | QOU                       |
| Circuit breaker type      | Standard                  |
| Options                   | Shunt trip 12/24 V AC/DC  |

### Complementary

|                                |  |
|--------------------------------|--|
| Line Rated Current             | 10 A   |
| Number of Poles                | 1P   |
| Interrupt Rating               | 10 KA 120/240 V AC<br>10 KA 120 V AC<br>5 kA 48 V DC       |
| Electrical connection          | Slotted box lugs, line side<br>Slotted box lugs, load side |
| [Ue] rated operational voltage | 120/240 V AC<br>120 V AC<br>48 V DC                        |
| Mounting mode                  | Unit mount   |
| AWG gauge                      | AWG 14...AWG 2 aluminium/copper                            |
| Maximum Height                 | 4.05 in (102.87 mm)  |
| Maximum Depth                  | 2.95 in (74.93 mm)   |
| Maximum Width                  | 1.5 in (38.10 mm)  |
| Tightening torque              | 45 lbf.in (5.08 N.m) AWG 14...AWG 2)                       |

### Environment

|                        |                         |
|------------------------|-------------------------|
| Product certifications | UL Listed<br>CSA<br>IEC |
|------------------------|-------------------------|

### Ordering and shipping details

|                     |                             |
|---------------------|-----------------------------|
| Category            | 00900-QOU BREAKERS & SWITCH |
| Discount Schedule   | DE2                         |
| Package weight(Lbs) | 11.36 oz (322.051 g)        |
| Returnability       | No                          |
| Country of origin   | MX                          |


## Offer Sustainability

|                             |   |
|-----------------------------|---|
| Sustainable offer status    | Green Premium product                         |
| REACH Regulation            | <a href="#">REACH Declaration</a>             |
| REACH free of SVHC          | Yes   |
| EU RoHS Directive           | Compliant <a href="#">EU RoHS Declaration</a> |
| Mercury free                | Yes   |
| RoHS exemption information  | <a href="#">Yes</a>                           |
| China RoHS Regulation       | <a href="#">China RoHS Declaration</a>        |
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a> |
| Circularity Profile         | No need of specific recycling operations      |
| Halogen content performance | Halogen free product                          |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Approximate Dimensions

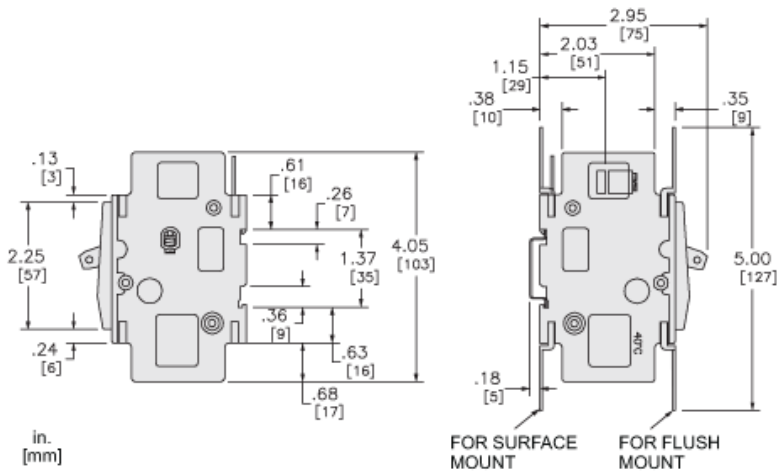

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG  
1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG  
TYP. BOTH ENDS FOR ALL CB'S SHOWN PER ARTICLE 430-1-(B) NEC

