

Panel Thickness	Number
E dim.	of
inches (mm)	Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

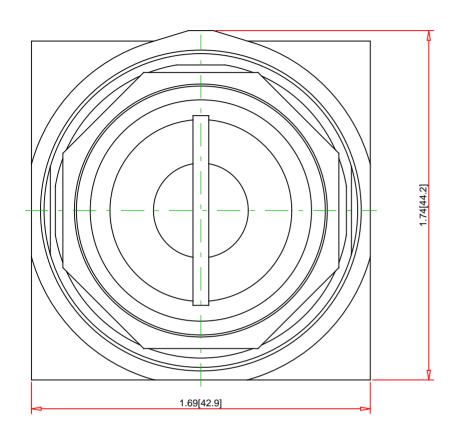

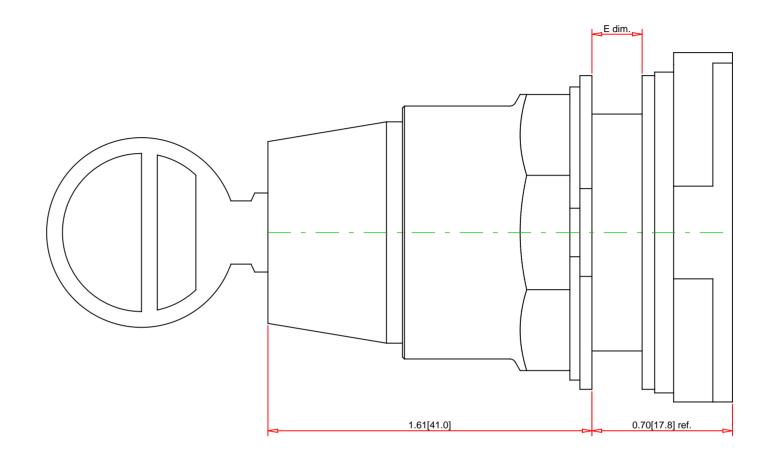

Note:

Drawings Not To Scale
Drawings Subject to Change Without Notice
Dimensions are inches next to [Millimeters]

Part No.:

## 9001KS88K14E28

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Specification:

**Technical Information:** 

Technical UL File: E78403 CCN NKCR CSA File: LR24590 Class 3211-03 CE Marked: Yes NEMA / IP Rating: NEMA 1/2/3/3R/4/6/12/3 Key Number: E28 Key Removal: 1, 2, 3 and 4 Positions Light Module Supply Voltage: Light Module Type: not applicable not applicable Number of Operators: 1 E78403 CCN NKCR LR24590 Class 3211-03

NEMA 1/2/3/3R/4/6/12/13 Water tight, Dust tight and Oil tight (Indoor/Outdoor), IP66

Description: Ring Nut Material: Operator Type:
Operator Action:
Button Type:
Guard Type:
Button/Cap Color:
Lens Type:
Lens Color:
Knob Type:

30mm Selector Switch Chromium Plated Zinc Non-Illuminated Maintained n/a n/a n/a

not applicable not applicable Key Operated Knob

Knob Color: Key Number of Positions: