



Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

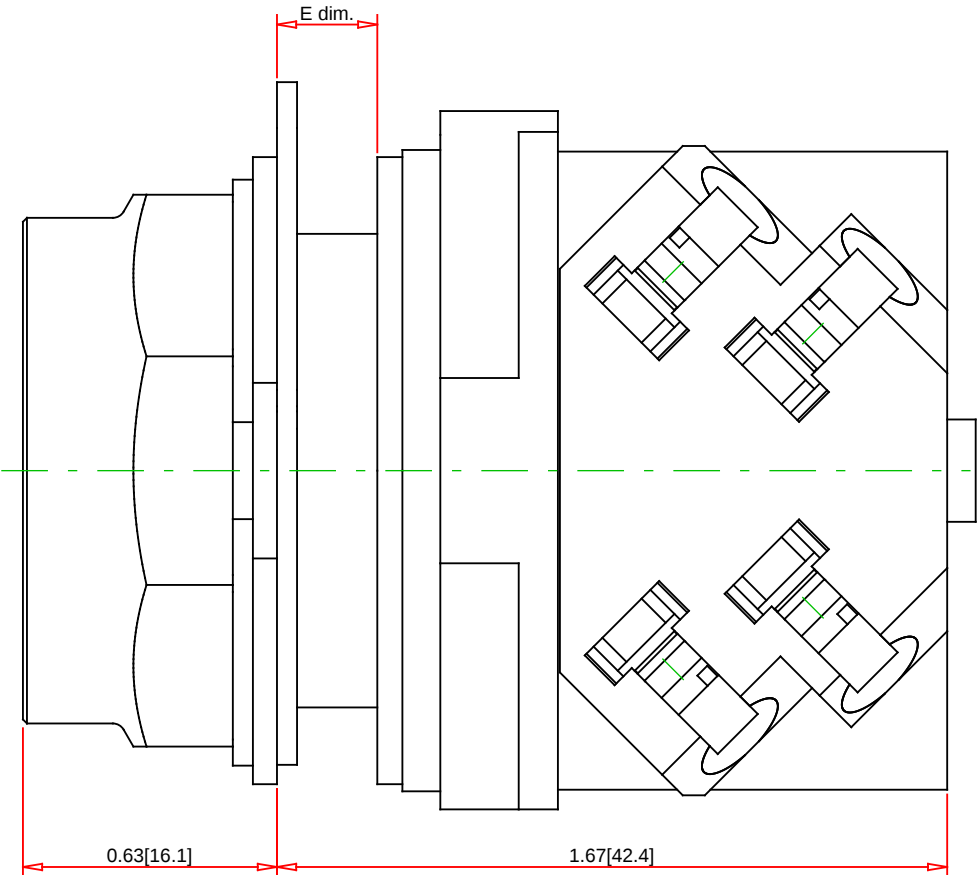

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9001KR1UH13

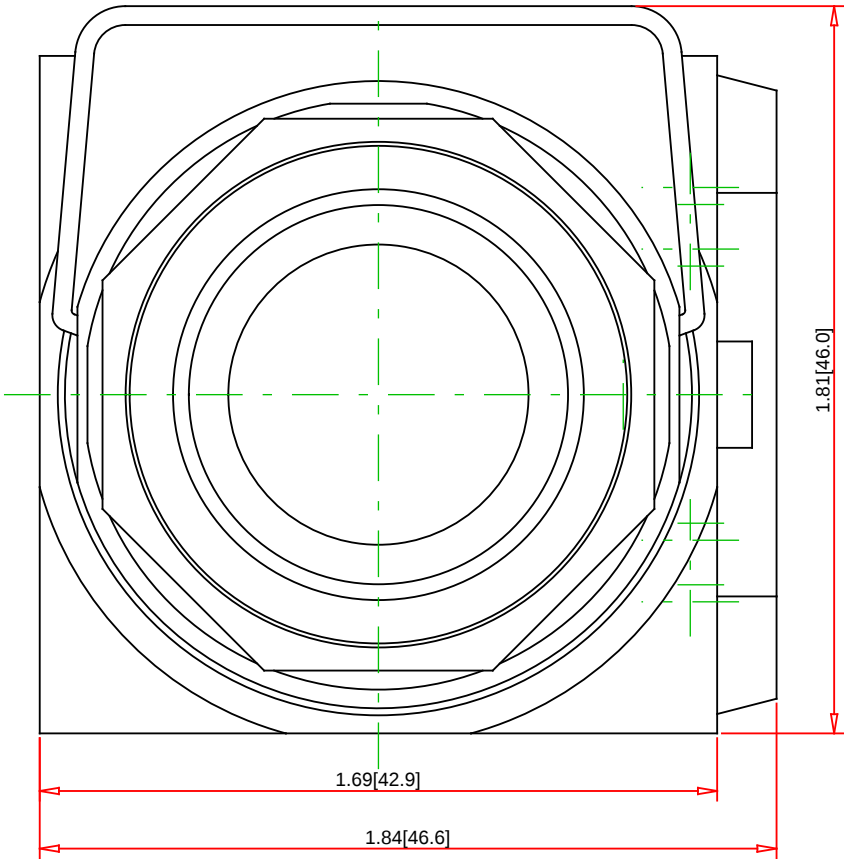

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:		Specification:	
Circuit Configuration:	SPDT	Description:	Push Buttons 30 mm - Assemblies
Electrical Life:	100000	Type:	Push Button
Mechanical Life:	5000000	Actuator Type:	Plunger
Operating Temp. Range:	-30 to 60 °C (-22 to 140 °F)	Illumination:	None
Power Rating:	Not HP Rated	Terminal Plating:	Terminal - Brass - no plating, Screw - Zinc Chromate
Number of Poles:	1 N.O. + 1 N.C.	Actuator Color:	Assorted
AC Voltage:	600	Actuator Part No.:	9001KR1U
Current Rating:	10	Contact Block Part No.:	9001KA1
Contact Rating:	AC-15: 600V, 1.2A; 240V, 3A; 120V, 6A DC-13: 600V, 0.1A; 250V, 0.27A; 125V, 0.55A	Legend Plate Part No.:	9001KN201, 9001KN202