
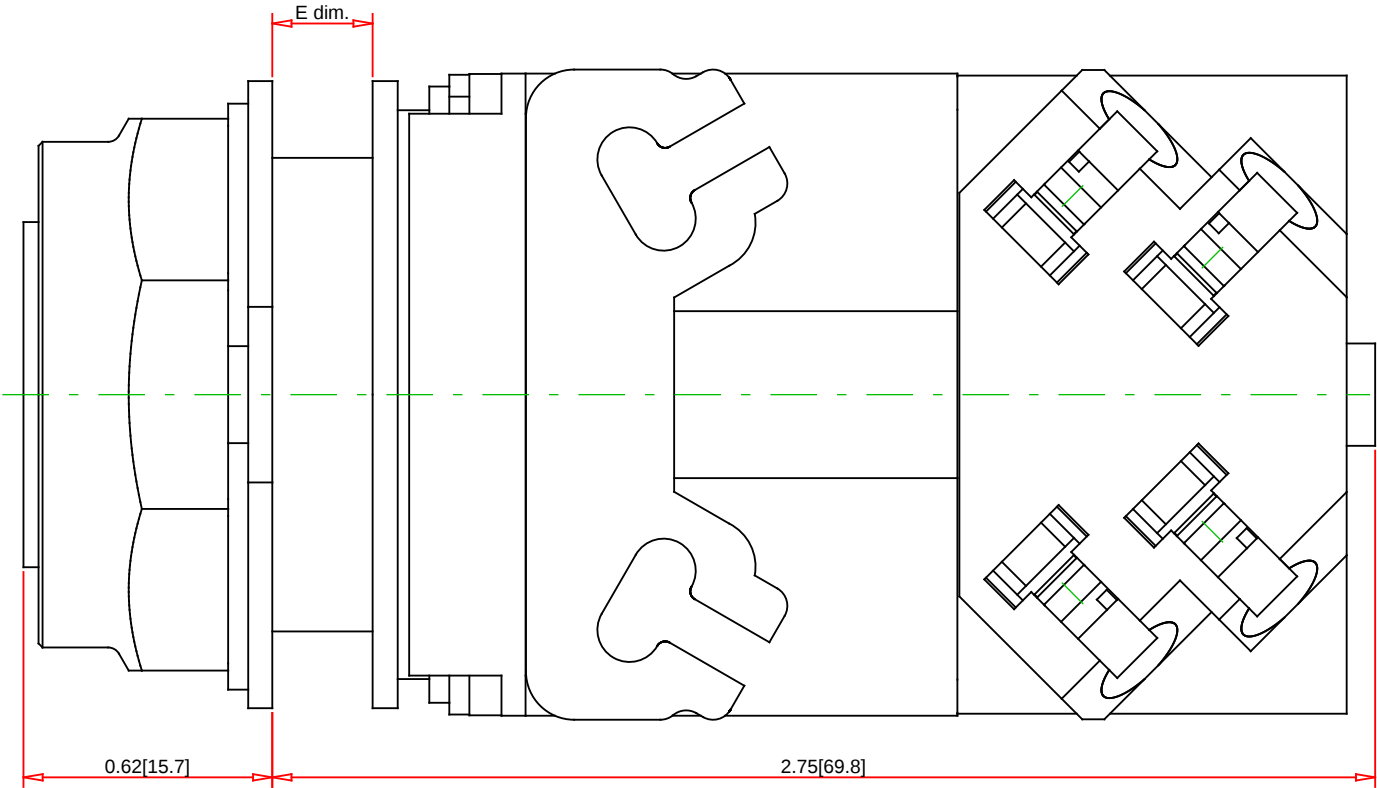


Panel Thickness E dim. inches (mm)	Number of Gasket
1/16 (1.6)	4
1/8 (3.2)	3
3/16 (4.8)	2
1/4 (6.4)	1

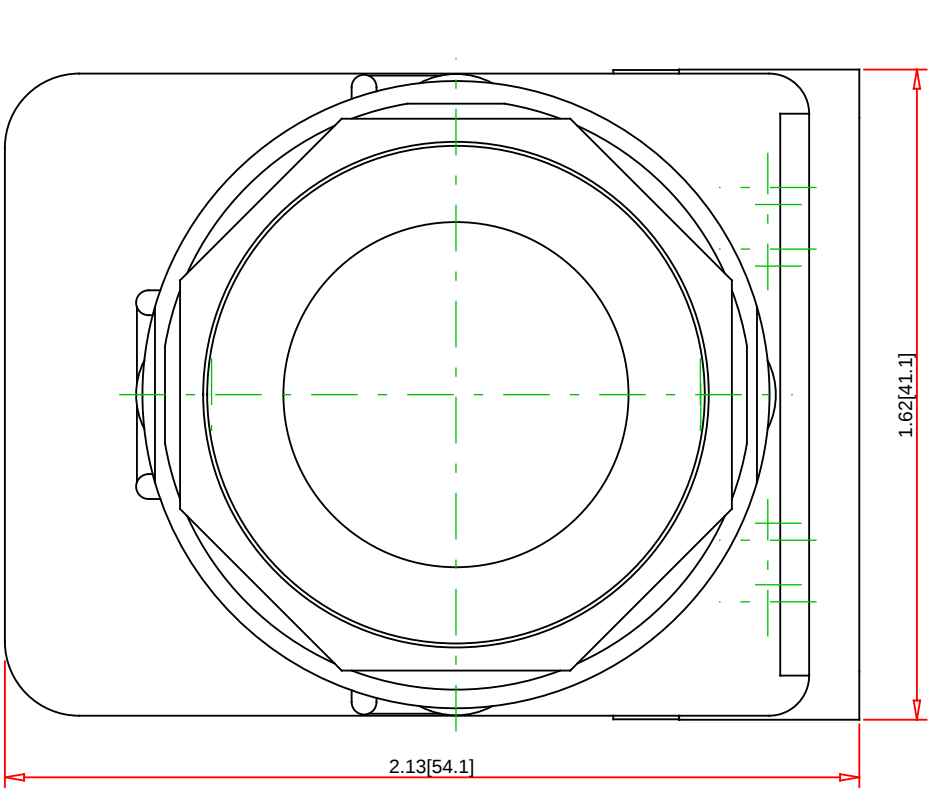


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9001SKT38LY

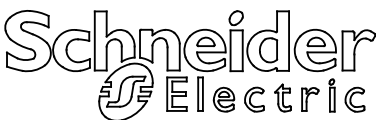

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL File:
E78403 CCN NKCR

CSA File:
LR24590 Class 3211-03

CE Marked:
Yes

RoHS:
Yes

NEMA / IP Rating:
NEMA 1/2/3/3R/4/4X/6/12/13 Water tight, Dust tight, Oil tight and Corrosion Resistant (Indoor/Outdoor)

Key Number:
n/a

Key Removal:
n/a

Light Module Supply Voltage:
120V

Light Module Type:
LED (Yellow)

Number of Operators:
n/a

Description:
30mm Pilot Light

Ring Nut Material:
Black Plastic

Operator Type:
Push-To-Test

Operator Action:
n/a

Guard Type:
n/a

Button/Cap Color:
n/a

Lens Type:
No Lens

Lens Color:
No Lens

Knob Type:
not applicable

Knob Color:
n/a

Number of Positions:
n/a

Specification: