



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|--|
| Electrical connection | Straight female connector 7/8", 5 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 6.56 ft (2 m) |
| Cable outer diameter | 0.32 in (8.1 mm) |
| Cable composition | 5 x 1.5 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 600 V AC 600 V DC |
| Line Rated Current | 10 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.88 lb(US) (0.4 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP67 |
| Product certifications | CULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Ordering and shipping details

| | |
|-----------------------|------------------------|
| Category | 22483 - MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 03389119074612 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.94 lb(US) (0.43 kg) |
| Returnability | No |
| Country of origin | DE |

Packing Units

| | |
|------------------|----------|
| Package 1 Height | 0.400 dm |
| Package 1 width | 2.200 dm |
| Package 1 Length | 2.800 dm |


Offer Sustainability

| | |
|---------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov |
|---------------------------|---|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

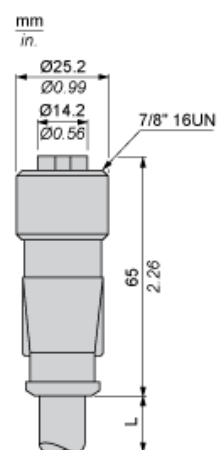

L : Length of cable

Connections and Schemes

Connectors



RD : Red
WH : White
BK : Black
GN : Green
OR : Orange