


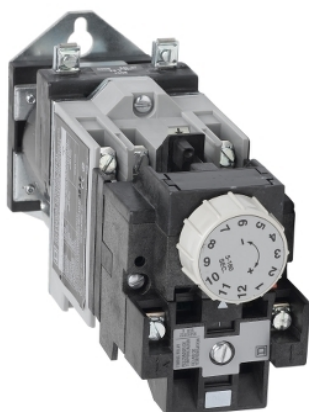

Main

Range	8501X
Relay Type	Timing
Product	Relay
Current Rating	10 A AC 5 A DC
Number of Poles	2P
Voltage Rating	250 V DC

Complementary

Coil Voltage	24 V DC
Coil Voltage Limits	Operational 0.8...1.1 U _c DC
Breaking Current	6 A 120 V AC inductive control circuit UL 508 3 A 240 V AC inductive control circuit UL 508 1.5 A 480 V AC inductive control circuit UL 508 1.2 A 600 V AC inductive control circuit UL 508 10 A ≤ 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC resistive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
Making Current	60 A 120 V AC inductive control circuit UL 508 30 A 240 V AC inductive control circuit UL 508 15 A 480 V AC inductive control circuit UL 508 12 A 600 V AC inductive control circuit UL 508 10 A ≤ 600 V AC resistive control circuit UL 508 1.1 A 125 V DC inductive control circuit UL 508 0.55 A 250 V DC inductive control circuit UL 508 0.2 A 301...600 V DC inductive control circuit UL 508 4 A 125 V DC inductive control circuit UL 508 0.8 A 250 V DC resistive control circuit UL 508
Time delay type	On-delay
Time Delay Time	0.2...60 s
Coil Inrush in WATTS	18 W
Coil Sealed Power in WATTS	18 W
Device Operating Time	37 ms - pick-up 21 ms - drop-out
Contact Configuration	2 NO 2 standard contact cartridges
Electrical connection	Screw clamp terminals
Wire Gauge	AWG 18...AWG 12 copper
Terminal Tightening Torque	Control circuit 9.03...12.04 lbf.in (1.02...1.36 N.m) screw terminal
Mounting Type	Panel
Operating Temperature Range	-40...160 °F (-40...71 °C)
Maximum Height	3.56 in (90.42 mm)
Maximum Width	2.23 in (56.64 mm)
Maximum Depth	7.77 in (197.36 mm)

Environment

Product certifications	CSA LR60905 class 3211 03 UL listed file E78403 CCN NKCR
------------------------	---

Ordering and shipping details

Category	21157 - 8501 XDO (DC)
Discount Schedule	CP2
GTIN	00785901154877
Nbr. of units in pkg.	1
Package weight(Lbs)	3.5 lb(US) (1.59 kg)
Returnability	No
Country of origin	MX

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------