

Product data sheet

Characteristics

2601BG1

Switch, reversing drum, 5 HP at 575 VAC single phase, 7.5 HP at 575 VAC polyphase, handle operated, NEMA 1 enclosure



Main

Product	Reversing Drum Switch
Enclosure Rating	NEMA 1
Horsepower	1.5 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase 5 Hp 460 V AC, 1 phase 5 Hp 575 V AC, 1 phase 5 Hp 200 V AC, 3 phase 5 Hp 230 V AC, 3 phase 7.5 Hp 460 V AC, 3 phase 7.5 Hp 575 V AC, 3 phase 2 Hp 115 V DC 2 hp 230 V DC
Maximum Rated Voltage	600 V AC 250 V DC
Number of Poles	3P

Complementary

Certifications	UL Listed CSA
Electrical Connection	Screw-clamp terminals
Type	B
Width	2.68 in (68.07 mm)
Height	5.38 in (136.65 mm)
Depth	4.61 in (117.09 mm)
Product weight	1.34 lb(US) (0.61 kg)

Ordering and shipping details

Category	21116 - 2601
Discount Schedule	CP1
GTIN	00785901555438
Nbr. of units in pkg.	1
Package weight(Lbs)	2.33 lb(US) (1.06 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Package 1 Height	4.70 in (11.938 cm)
Package 1 width	5.60 in (14.224 cm)
Package 1 Length	7.20 in (18.288 cm)


Offer Sustainability

EU RoHS Directive	Not compliant
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

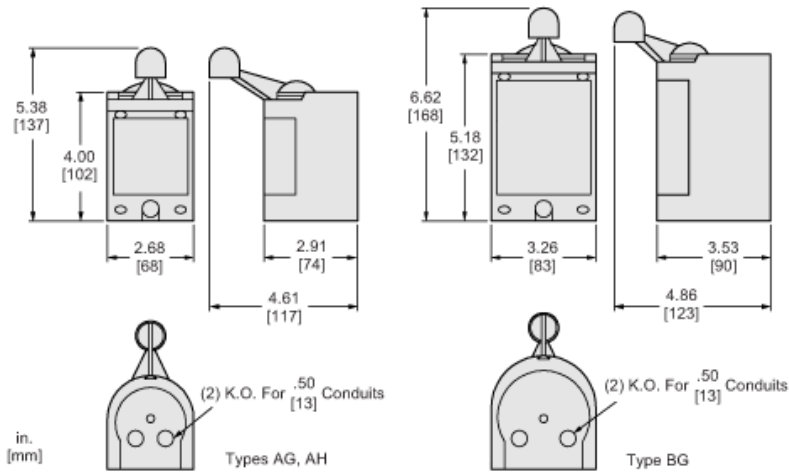

Connections and Wiring Diagrams

