



## Main

Range of product	Harmony XB6E
Product or component type	Illuminated monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	0.63 in (16 mm)
Sale per indivisible quantity	5
Shape of signaling unit head	Rectangular
Type of operator	Spring return
Operator profile	Green flush
Contacts type and composition	1 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston 2.8 x 0.5 mm Solder terminal <= 0.75 mm <sup>2</sup> AWG 19 Fast connector socket
Contacts material	Gold-flashed silver
Light source	Integral LED
[Us] rated supply voltage	24 V DC polarised

## Complementary

Net Weight	0.01 lb(US) (0.006 kg)
Operating position	Any position
Marking	CE
Mechanical durability	1000000 cycles
Contact resistance	50 mOhm 1/6 V
Short-circuit protection	2 A cartridge fuse gG
[Ith] conventional free air thermal current	3 A fast connector socket 5 A
[Ie] rated operational current	1.5 A 120 V, AC-12 EN/IEC 60947-5-1 1 A 240 V, AC-12 EN/IEC 60947-5-1 1 A 24 V, DC-12 EN/IEC 60947-5-1 0.7 A 24 V, DC-13 EN/IEC 60947-5-1 0.2 A 125 V, DC-12 EN/IEC 60947-5-1 0.15 A 125 V, DC-13 EN/IEC 60947-5-1
Electrical durability	100000 cycles, AC, 0.7 A 220 V EN/IEC 60947-5-1 appendix C
Signalling type	Steady
Current consumption	10 mA
Service life	30000 h

## Environment

Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	14...131 °F (-10...55 °C)
IP degree of protection	IP65 IEC 60529
Standards	CSA C22.2 No 14 JIS C 4520 IEC 60947-5-1 UL 508 IEC 60947-1 JIS C 852
Product certifications	CURus CCC
Vibration resistance	1 mm 10...55 Hz)IEC 60068-2-6
Shock resistance	10 gn 11 ms) half sine wave acceleration IEC 60068-2-27

## Ordering and shipping details

Category	22459 - PUSHBUTTONS, 16MM
Discount Schedule	CS2
GTIN	00785901124450
Nbr. of units in pkg.	5
Package weight(Lbs)	0.03 lb(US) (0.01 kg)
Returnability	No
Country of origin	CN

## Packing Units

Package 1 Height	0.280 dm
Package 1 width	0.730 dm
Package 1 Length	1.850 dm

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty


Warranty	18 months
----------	-----------

---

Pushbutton

---

Rectangular Head

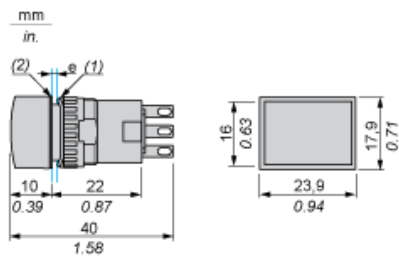

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)
- (2) Seal (thickness: 0.5 mm / 0.01 in.)
- e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

---

Panel Cut-Out and Mounting

---

Rectangular Head

