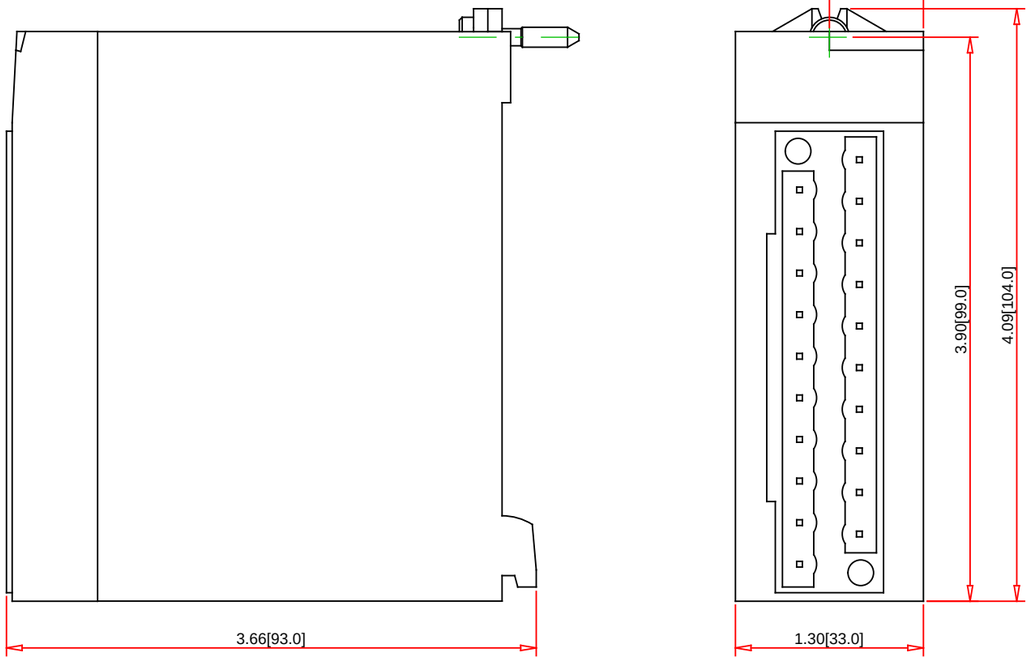

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

BMXAMO0410

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Mounting:	Any slot except 0
Isolation Between Channels:	750 VDC
Isolation Between Channels and Bus:	1400 VDC
UL & CSA:	Yes
CE:	Yes
RoHS:	Yes
Class 1 Div 2 CSA:	Yes
GOST/BV/GL/RMRS/ABS:	Yes
Weight [kg]:	0.175

Specification:

Description:	
Selection:	M340 PAC
Conf.Coating - 25C to 70C op.temp.:	Yes
Input Voltage Range:	
Input Current:	
Output Voltage Range:	± 10 V
Output Current:	2 to 20 mA, 4 to 20 mA
Connection Type:	BMXFTB2000/BMXFTB2010/BMXFTB2020/BMXFTW301/BMXFTW501/BMXFTW1001
Number of Inputs:	
Number of Outputs:	4