


Product data sheet

Characteristics

9422ATCF301

Operating mechanism, flange mounted, variable depth, 30A, 250 V, fuseholder, switch mechanism, 6 inch handle, NEMA 4

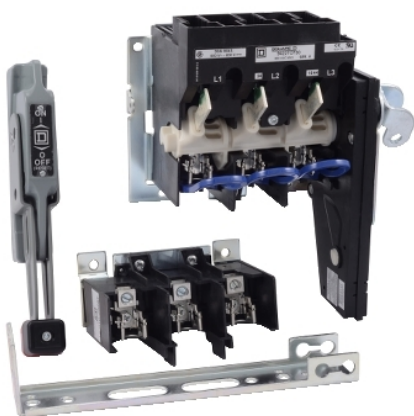

Main

| | |
|-----------------|---------------------------|
| Range | 9422T |
| Product | Disconnect Switch |
| Disconnect Type | Fusible disconnect switch |

Complementary

| | |
|-------------------|---|
| Mounting Type | Flange rod variable depth |
| Current Rating | 30 A |
| Horsepower Rating | 7.5 Hp 200 V AC 7.5 Hp 230 V AC 15 Hp 460 V AC 20 Hp 575 V AC 5 hp 250 V DC |
| Fuse Rating | 30 A 250 V |
| Handle Type | 6 in handle included NEMA 1/3/3R/4 enclosures sheet steel |
| Fuse Type | H K J R |

Environment

| | |
|----------------|----------------------|
| Certifications | UL Recognized CSA |
|----------------|----------------------|

Ordering and shipping details

| | |
|---------------------|----------------------|
| Category | 21732 - 9422 |
| Discount Schedule | CP1 |
| GTIN | 00785901872153 |
| Package weight(Lbs) | 8.8 lb(US) (3.99 kg) |
| Returnability | No |
| Country of origin | MX |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

| | |
|-----------------------------|---|
| China RoHS Regulation |  China RoHS Declaration |
| PVC free | Yes |
| Contractual warranty | |
| Warranty | 18 months |