



## Main

|                       |   |
|-----------------------|---|
| Product Range         | Legacy  |
| Product Type          | Socket  |
| Product Compatibility | Relay 750XBXR<br>Suppressor module 70-ASMM<br>Diode 70-ASMD<br>Signalling device 70-ASMLG<br>Suppressor module 70-ASMR<br>Jumper wire 16-750CBJ-1 |
| Number of Terminals   | 8   |
| Switch Function       | DPDT  |
| Contact Composition   | 2 NO + 2 NC   |

## Complementary

|                              |   |
|------------------------------|---|
| Rated Current                | 16 A  |
| Rated voltage                | 300 V   |
| Contact Terminal Arrangement | Separate  |
| Connections Terminals        | Lift terminalsflexible<br>Lift terminalsolid        |
| Tightening Torque            | < 0.8 N.m   |
| Fixing Mode                  | By screw M3.5, M3.5 panel<br>Clip-on 35 mm DIN rail |
| Shape of Screw Head          | Combination roundhead                               |
| Product Weight               | 2.79 oz (79 g)                                      |
| Width                        | 1.42 in (36 mm)                                     |
| Depth                        | 2.24 in (57 mm)                                     |

## Environment

|                                       |                             |
|---------------------------------------|-----------------------------|
| Ambient Air Temperature for Storage   | -40...221 °F (-40...105 °C) |
| Ambient Air Temperature for Operation | -40...131 °F (-40...55 °C)  |
| IP Degree of Protection               | IP20                        |
| Flame Retardance                      | UL94-V0                     |
| Product Certifications                | UL<br>CSA<br>CE<br>RoHS     |

## Ordering and shipping details

|      |                |
|------|----------------|
| GTIN | 03606480278044 |
|------|----------------|


## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>   |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.   |

---

Connections and Wiring Diagrams

---

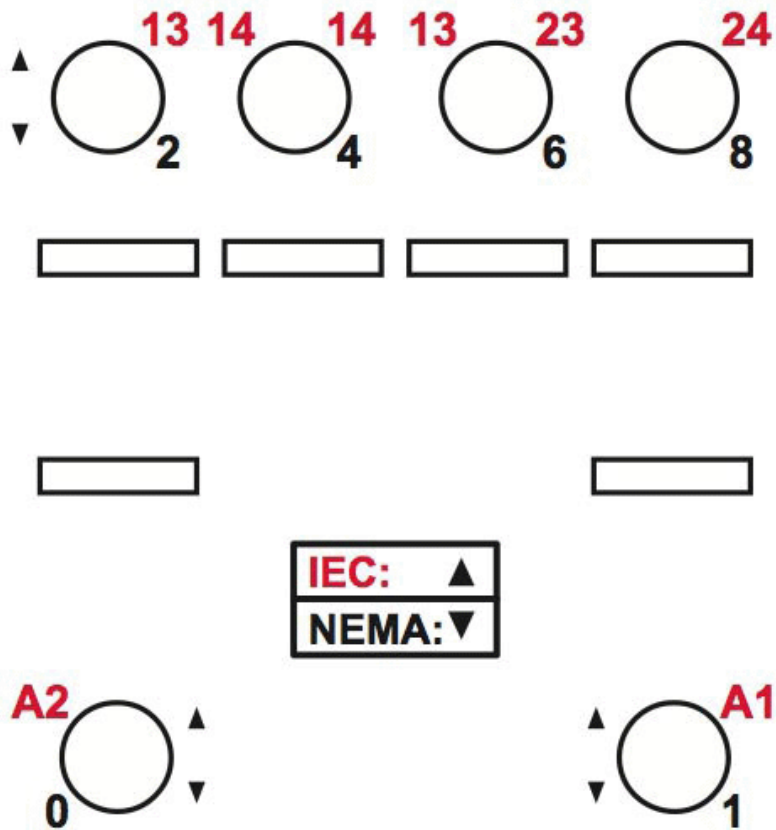

---

Connections and Wiring Diagrams

---

