

# Product Environmental Profile

## THALASSA PLS






## General information

<b>Representative product</b>	THALASSA PLS -NSYPLS2736
<b>Description of the product</b>	The main purpose of the product is to protect, integrate and allow the fastening of electric, electronic or mechanical devices and accessories for modular distribution. This product consists of: Insulating modular dimension boxes, allowing creation of assemblies, with polyester body and two different heights covers. These covers are made of transparent polycarbonate or opaque polycarbonate or polyester. The closure can be through 4, 6 or 8 points depending on the box size. This closure can be manual, or also with slot or triangular screws.
<b>Functional unit</b>	The main function of the Insulating modular box product is to protect persons against direct contact with live parts and allow grouping monitoring, control and protection of electronic or mechanical device from weather condition in a single enclosure or a cabinet having the dimensions 270mm x 360Lmm x 180mm during 20 years, while protecting against mechanical impacts (IK8) and the penetration of solid objects and liquids (IP65) in accordance with IEC62262 standards.



## Constituent materials

**Reference product mass** 2098 g including the product, its packaging and additional elements and accessories

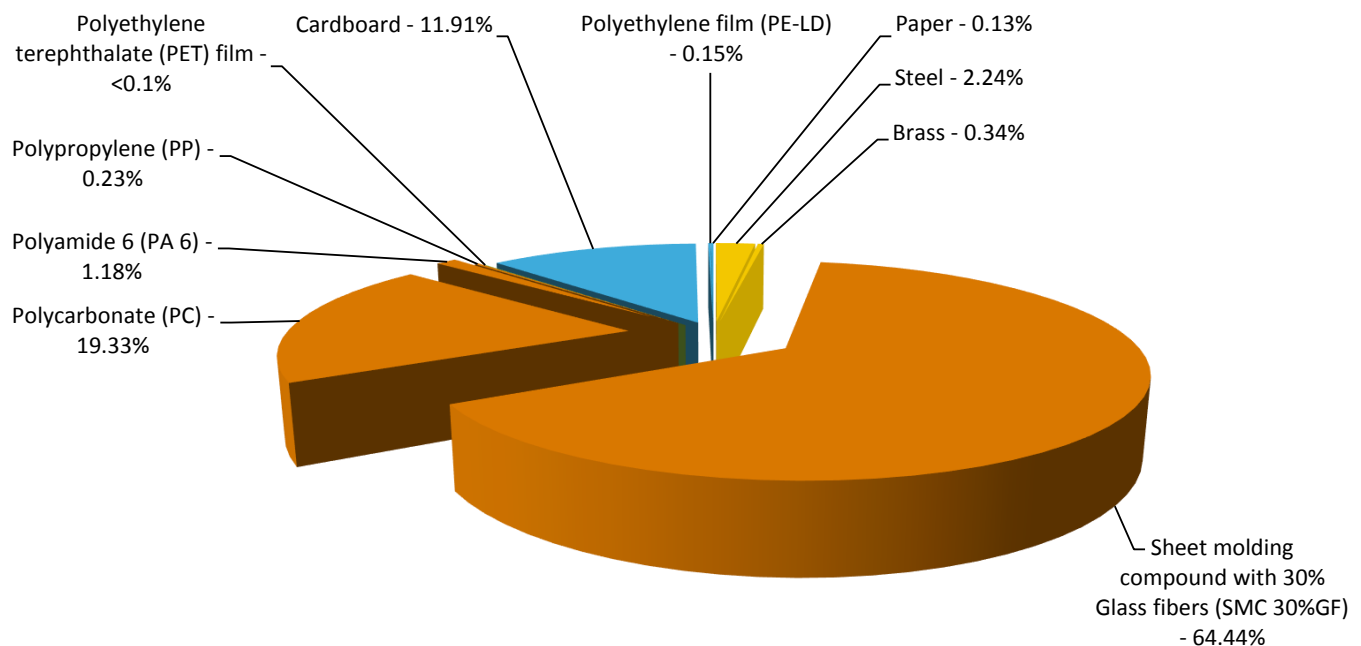

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The THALASSA PLS presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 265 g, consisting of It consists of cardboard (corrugated) (97.7%), PE-LD film (1.2%) & Paper for label (1.1%). Packaging recycled materials is 30% of total packaging mass. Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: <b>24%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Enclosures			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	This product does not have any energy consumption			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The main purpose of the product is to protect, integrate and allow the fastening of electric, electronic or mechanical devices and accessories for modular distribution. This product consists of: Insulating modular dimension boxes, allowing creation of assemblies, with polyester body and two different heights covers. These covers are made of transparent polycarbonate or opaque polycarbonate or polyester. The closure can be through 4, 6 or 8 points depending on the box size. This closure can be manual, or also with slot or triangular screws.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Molins, Spain.	0	0	0

Compulsory indicators		THALASSA PLS - NSYPLS2736					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	7.66E-05	7.66E-05	1.08E-08	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.82E-02	1.63E-02	1.24E-03	2.83E-05	0*	5.98E-04
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6.13E-03	4.95E-03	2.85E-04	7.06E-04	0*	1.87E-04
Contribution to global warming	kg CO <sub>2</sub> eq	1.44E+01	1.33E+01	2.71E-01	3.75E-01	0*	4.10E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.95E-06	1.94E-06	5.48E-10	2.43E-10	0*	1.41E-08
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2.93E-03	2.70E-03	8.82E-05	8.78E-05	0*	6.06E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	5.85E-02	5.82E-02	2.42E-05	2.25E-05	0*	2.99E-04
Total Primary Energy	MJ	2.65E+02	2.58E+02	3.83E+00	1.36E-01	0*	3.14E+00

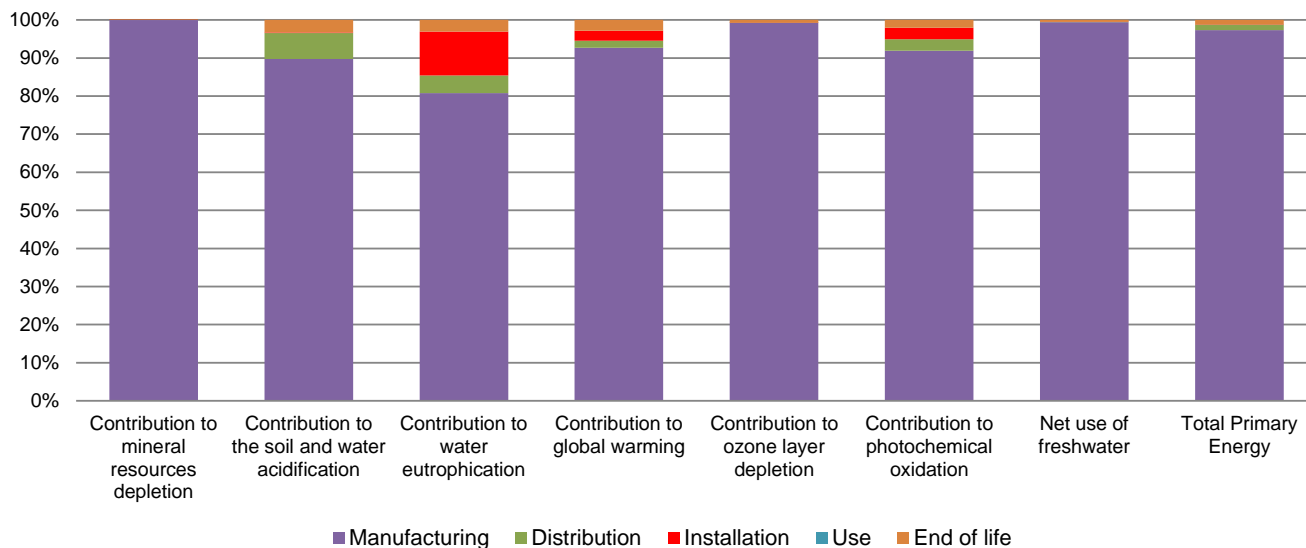

Optional indicators		THALASSA PLS - NSYPLS2736					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.00E+02	1.94E+02	3.80E+00	1.51E-01	0*	2.58E+00
Contribution to air pollution	m³	1.60E+03	1.56E+03	1.15E+01	1.50E+00	0*	2.08E+01
Contribution to water pollution	m³	3.51E+03	3.42E+03	4.45E+01	2.09E+01	0*	2.73E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.23E-01	2.23E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.43E+00	2.43E+00	5.10E-03	0*	0*	3.11E-03
Total use of non-renewable primary energy resources	MJ	2.62E+02	2.55E+02	3.82E+00	1.46E-01	0*	3.14E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.43E+00	2.43E+00	5.10E-03	0*	0*	3.11E-03
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.29E+02	2.22E+02	3.82E+00	1.46E-01	0*	3.14E+00
Use of non renewable primary energy resources used as raw material	MJ	3.34E+01	3.34E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.06E+01	7.20E+00	0*	0*	0*	3.37E+00
Non hazardous waste disposed	kg	1.97E+00	1.71E+00	9.62E-03	2.49E-01	0*	8.62E-03
Radioactive waste disposed	kg	1.23E-03	1.22E-03	6.85E-06	0*	0*	1.39E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.17E-01	6.60E-02	0*	0*	0*	4.51E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	8.98E-02	1.10E-02	0*	3.24E-03	0*	7.56E-02
Exported Energy	MJ	1.64E-03	0*	0*	1.64E-03	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00100-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH25	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	10/2016	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013			



Schneider Electric Industries SAS

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00100-V01.01-EN

© 2015 - Schneider Electric – All rights reserved

10/2016