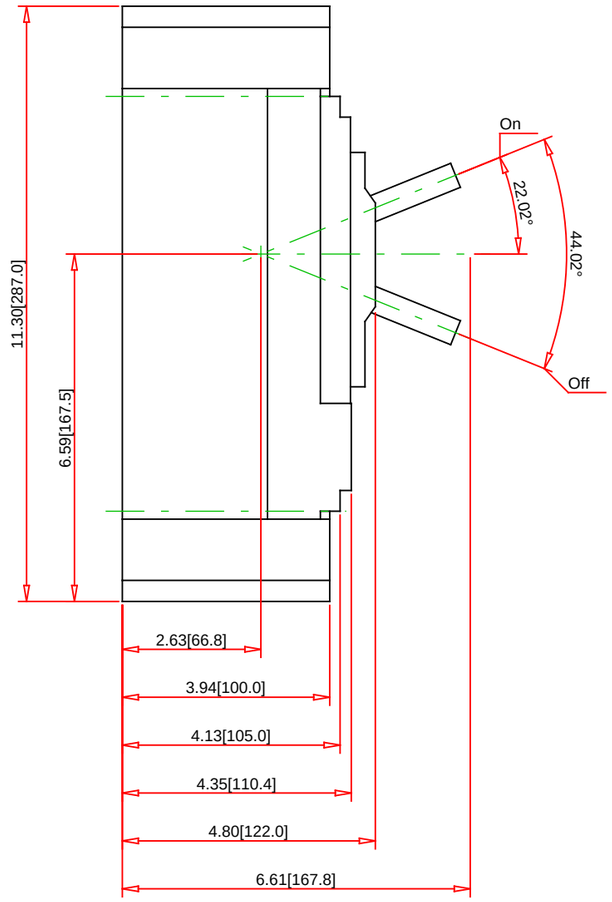

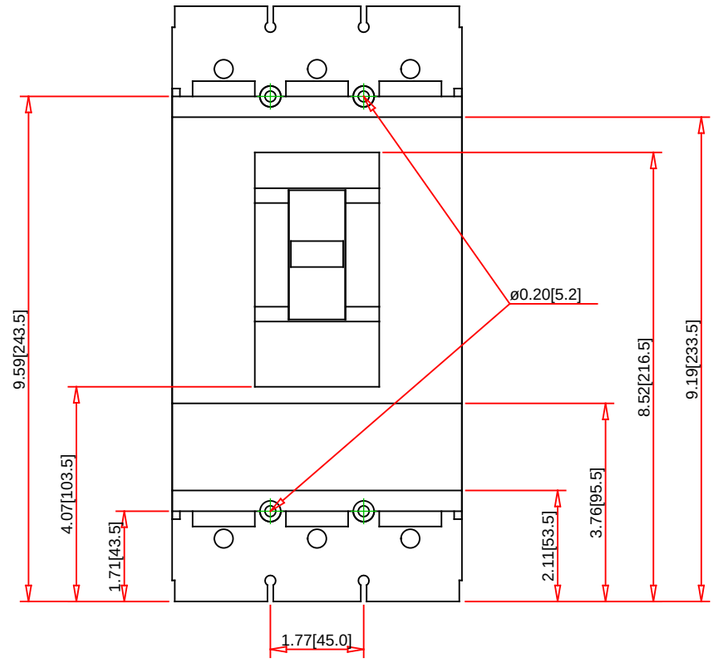

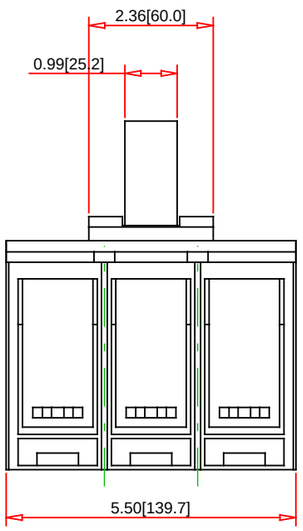

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

LGL36250-Electronic

SQUARE D by Schneider Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Certification:	UL Listed, CSA, IEC Rated
Mounting Type:	ON=lugs, OFF=lugs
Weight:	17
AL Lug Wire Size A,L,M,P:	2AWG-500kcmil (Al), 2AWG-600kcmil(Cu)
Depth:	
Height:	
Width:	

Specification:

Description:	Unit Mount – 3 Pole Molded Case Circuit Breaker
General Application:	Provides overload and short circuit protection
For Use With:	Industrial Panelboards and Switchboards
Voltage Rating:	600Vac Max
Ampere Rating:	250A
Electronic Trip Unit Function:	LI, LS, LSI, or LSIG
Number of Poles:	3
Short Circuit Current Rating:	65/35/18 kA UL and IEC ratings
Circuit Breaker Rating:	Standard 80%