

NOTES:  
cULus LISTED FILE E-136861  
SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL ASSEMBLY IS INSTALLED AND BONDED. (CJ250NAWK IN CANADA).  
ENCLOSURE SUPPLIED WITH DUAL COVER INTERLOCK. NO KNOCKOUTS.  
NEUTRAL – INSULATED GROUNDABLE.  
ENCLOSURES ACCEPT STANDARD 80% RATED OR 100% RATED CIRCUIT BREAKERS. WHEN USING 100% RATED CIRCUIT BREAKERS USE ONLY WITH 90°C (MIN) RATED WIRE SIZED PER AMPACITY OF 75°C RATED CONDUCTOR.


SEISMIC NOTES:  
USE (3) 1/4" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA  
MAX CONFIGURED WEIGHT 32 LB FOR THE PURPOSE OF DETERMINING  
SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,  
CONTACT SCHNEIDER ELECTRIC.

J250AWK & J250AWKVW  
NEMA/EEMAC TYPE 1,3,3R,5 OR 12  
GRAY BAKED ENAMEL ELECTRODEPOSITED  
OVER CLEAN PHOSPHATIZED STEEL

J250DS & J250DSVW  
NEMA/EEMAC TYPE 1,3,3R,4,4X,5 OR 12  
TYPE 304 STAINLESS STEEL

J250SS & J250SSVW  
NEMA/EEMAC TYPE 1,3,3R,4,4X,5 OR 12  
TYPE 316 STAINLESS STEEL

CJ250NAWK  
CONTAINS FACTORY INSTALLED AND BONDED SN400LA NEUTRAL  
SUITABLE FOR USE AS SERVICE EQUIPMENT IN CANADA.  
NEMA/EEMAC TYPE 1,3,3R,5 OR 12  
GRAY BAKED ENAMEL ELECTRODEPOSITED  
OVER CLEAN PHOSPHATIZED STEEL

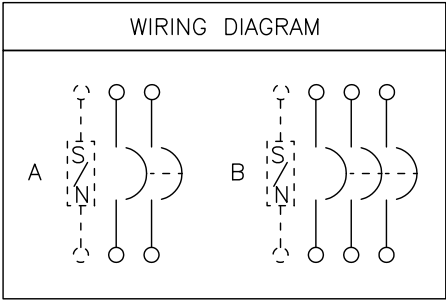

CIRCUIT BREAKER TERMINAL LUG DATA					
CIRCUIT BREAKER CATALOG NO. PREFIX	AMPERE RATING	CONDUCTORS PER PHASE	WIRE SIZE (AWG/KCMIL)		TYPE
			MAX	MIN	
HD, HG HJ, HL, HR	15–150	1	#3/0	#14	AL/CU
JD, JG JJ, JL, JR	150–175	1	#4/0	#4	AL/CU
	200–250	1	#350	#3/0	AL/CU

FIELD INSTALLABLE SOLID NEUTRAL ASSEMBLIES AND GROUND KIT						
CATALOG NUMBER	MAXIMUM AMPERE RATING	NUMBER OF TERMINALS	CONDUCTORS PER TERMINAL	WIRE SIZE (AWG/KCMIL)		TYPE
				MAX	MIN	
SN100FA	100A	2	1	#1/0	#14	CU
				#1/0	#12	AL
SN400LA	250A	2	1 OR 2	#600 #250	#1 #1	CU/AL CU/AL
		2	1	#300	#4	AL OR CU
PK0GTJ250	250A	2	1	#300	#6	AL OR CU
PK0GTH150	150A	2	1	#2	#14	AL OR CU

FOR 200% NEUTRALS USE SN400LA (AMP RANGE 100 TO 250, CU WIRE ONLY).

DUAL DIMENSIONS: INCHES  
MILLIMETERS

FIELD INSTALLABLE CIRCUIT BREAKER DATA										
CIRCUIT BREAKER CATALOG NO PREFIX	WIRING DIA	AMPERE RATING	UL LISTED INTERRUPTING RATING RMS SYMMETRICAL AMPERES							
			AC VOLTAGE					DC VOLTAGE		
			240	480Y/277	480	600Y/347	600	125	250	500
HD	A,B	15–150	25K	18K	18K	14K	14K	20K	20K	–
JD	A,B	150–250	25K	18K	18K	14K	14K	20K	20K	–
HG	A,B	15–150	65K	35K	35K	18K	18K	20K	20K	–
JG	A,B	150–250	65K	35K	35K	18K	18K	20K	20K	–
HJ	A,B	15–150	100K	65K	65K	25K	25K	20K	20K	–
JJ	A,B	150–250	100K	65K	65K	25K	25K	20K	20K	–
HL	A,B	15–150	125K	65K	65K	25K	25K	20K	20K	–
JL	A,B	150–250	125K	65K	65K	25K	25K	20K	20K	–
HR	A,B	15–150	125K	65K	65K	25K	25K	20K	20K	–
JR	A,B	150–250	125K	65K	65K	25K	25K	20K	20K	–

CIRCUIT BREAKER ENCLOSURES – SEISMIC  
15–250 AMPERE  
ENCLOSURE – NEMA/EEMAC TYPE 12/3R INDUSTRIAL  
NEMA/EEMAC TYPE 3,3R,4,4X,5 OR 12 STAINLESS STEEL



DWG# 3363S  
NO.